

* 锁舌长度不得短于4.5mm *



锁舌厚度建议3.5~4.8mm
最厚不超过4.8mm




锁舌建议尺寸



解锁行程预留不得少于1.3mm
继续下压约1.3mm达到开锁行程

下压约3.6mm达到锁定行程

回弹约1.0mm呈锁定状态

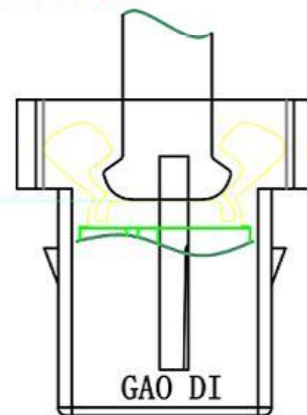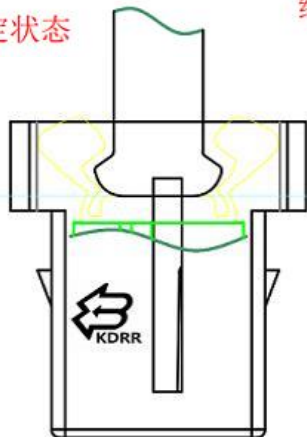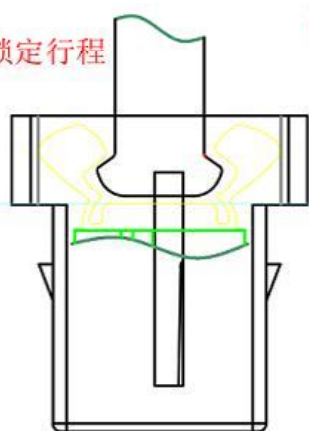

外壳: POM
按键: PA66
弹簧: SUS304
钩针: SUS304

TITLE	DOOR LATCH SWITCH	DRAWN	TOLERANCE OTHERWISE UNLESS SPECIFIED		8			
PART NO.	Lock switch	CHECKED	UP TO 5	±0.2	7			
DRAW NO.	GD-PR-20S	APPROVED	ABOVE 5 ~ 30	±0.3	6			
SCALE: 2:1	UNIT: mm	DATE:	ABOVE 30 ~ 50	±0.4	5			
			ABOVE 50	±0.5	4			
			ANGLE	±3'	3	SPRING	SUS	1 Ni PLATED
東莞市高迪電子有限公司					2	HOUSING	POM	1 BLACK
					1	SLIDER	PA12	1 BLACK
					NO.	PARTS	MATERIAL	QTY. FINISHING
DONG GUAN GAODI ELECTRONICS CO., LTD.								