
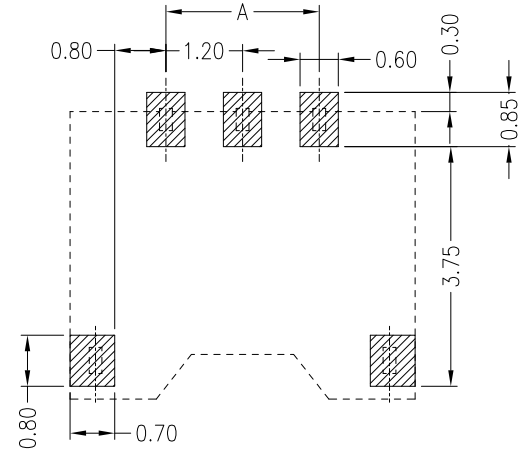






REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	Lingqing	2020/06/22

**Specifications:**


Poles:02~10  
 Contact resistance: $\leq 20m\Omega$   
 Insulation resistance: $\geq 100M\Omega$   
 Rated voltage:50V AC DC  
 Rated current:2.0A AC DC  
 Withstand Voltage: 500V AC/minute  
 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$   
 Housing:PA9T UL94V-0, Black  
 Contacts: Phosphor Bronze Matte Sn/Gold  
 Solder Tabs:Brass Matte Sn

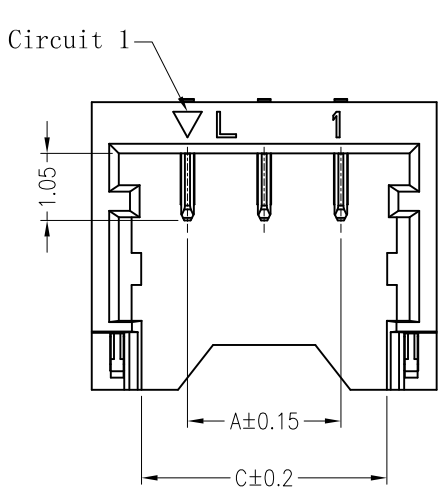

Circuits	Dimensions(mm)		
	A	B	C
02	1.20	4.20	2.64
03	2.40	5.40	3.84
04	3.60	6.60	5.04
05	4.80	7.80	6.24
06	6.00	9.00	7.44
07	7.20	10.20	8.64
*08	8.40	11.40	9.84
*09	9.60	12.60	11.04
*10	10.80	13.80	12.24

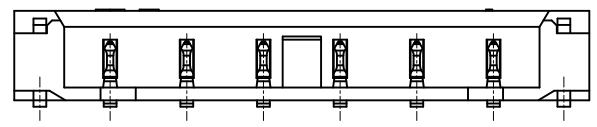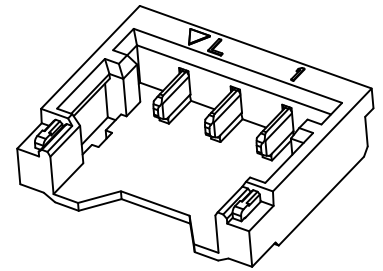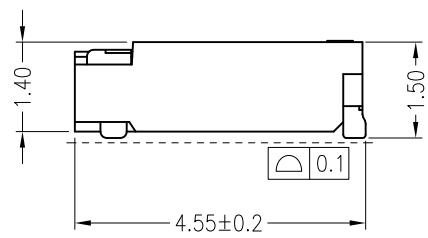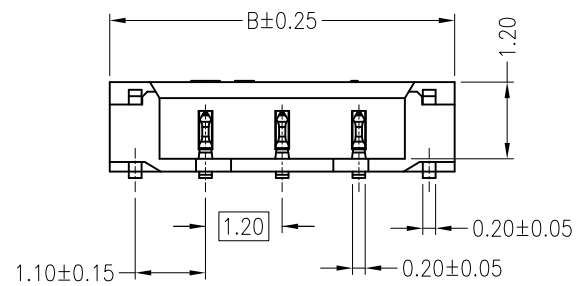


6P With Sticking Point

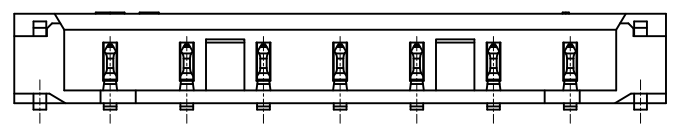



7P~10P With Sticking Point

**ORDER INFORMATION:**

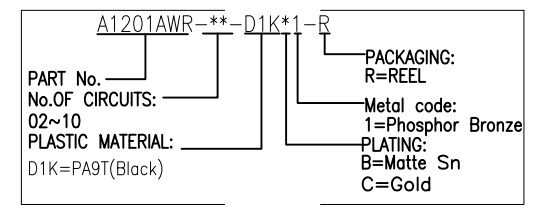


<b>東莞市高迪電子有限公司</b> DONG GUAN GAO DI ELECTRONICS CO., LTD		TITLE:	
		1.20 Pitch Wafer 90° SMT	
GENERAL TOLERANCE		USE:	PART NO.:
X. $\pm 0.50$	X. $\pm 5^{\circ}$	CUSTOMER	A1201AWR-**-D1K*1-R
X.X $\pm 0.30$	X.X $\pm 2^{\circ}$	APPD: WangFeng	DWG NO.:
X.XX $\pm 0.20$	X.XX $\pm 1^{\circ}$	CHKD: Shaojinghe	GCKH-0864
UNITS: mm		DR: Zenglingqing	SCALE: 1 : 1
			SHEET: 1 / 1

REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	蒋建银	2020/06/25

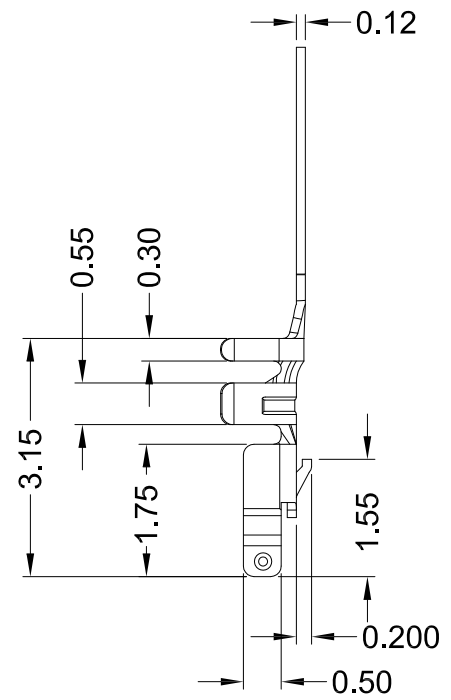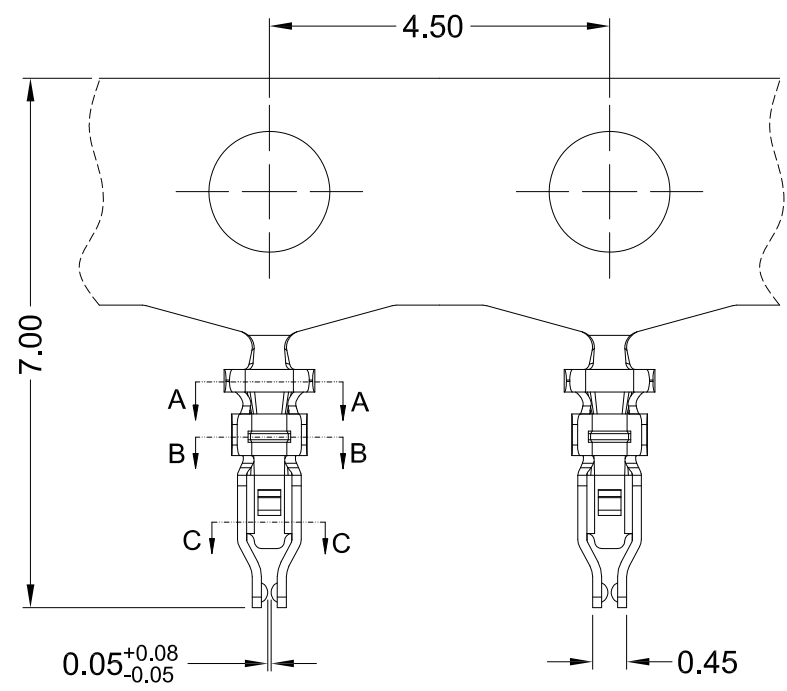

Specifications:  
 Contact resistance:  $\leq 20\text{m}\Omega$   
 Insulation resistance:  $\geq 100\text{M}\Omega$   
 Rated voltage: 50V AC DC  
 Rated current: 2.0A AC DC  
 Withstand Voltage: 500V AC/minute  
 Temperature Range:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$



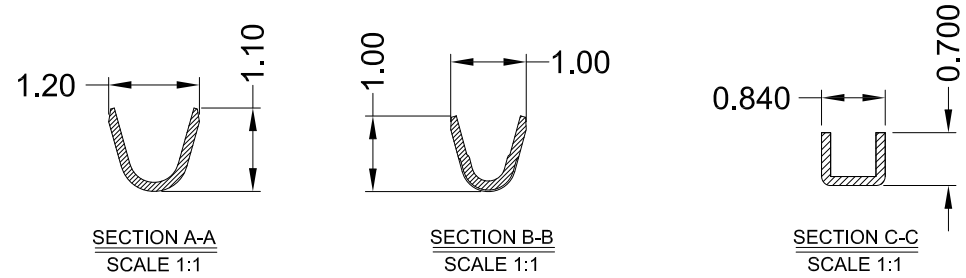


Ordering Information & Specification:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
A1201T-02端子	AWG #28~#30	0.70mm(MAX)	Phosphor bronze	Gold Flash	/




<b>东莞市高迪电子有限公司</b> DONG GUAN GAO DI ELECTRONICS CO., LTD		TITLE: 1.2mm Terminal	
		PART NO.: A1201T-02端子	
GENERAL TOLERANCE X. $\pm 0.50$ X. $\pm 5^{\circ}$ X.X $\pm 0.30$ X.X $\pm 2^{\circ}$ X.XX $\pm 0.20$ X.XX $\pm 1^{\circ}$		USE: CUSTOMER APPD: 王锋 CHKD: 曾令青	
UNITS: mm		DR: 蒋建银	
		SCALE 1 : 1	SHEET 1 / 1

REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	蒋建银	2020/06/25



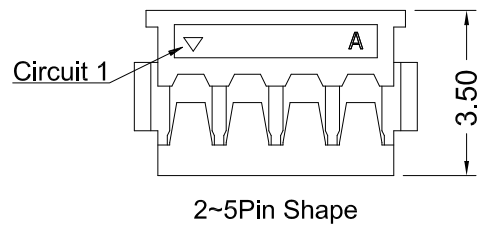


Poles	Dimensions(mm)		
	A	B	C
2	1.20	2.60	3.10
3	2.40	3.80	4.30
4	3.60	5.00	5.50
5	4.80	6.20	6.70
6	6.00	7.40	7.90
7	7.20	8.60	9.10
8	8.40	9.80	10.30
9	9.60	11.00	11.50
10	10.80	12.20	12.70


**Specifications:**  
 Contact resistance:  $\leq 20m\Omega$   
 Insulation resistance:  $\geq 100M\Omega$   
 Rated voltage: 50V AC DC  
 Rated current: 2.0A AC DC  
 Withstand Voltage: 500V AC/minute  
 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$   
 Housing: LCP UL94V-0, Black

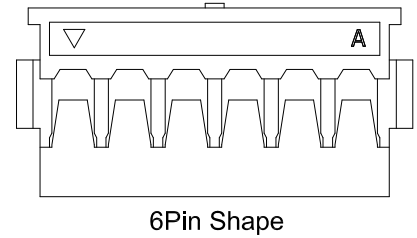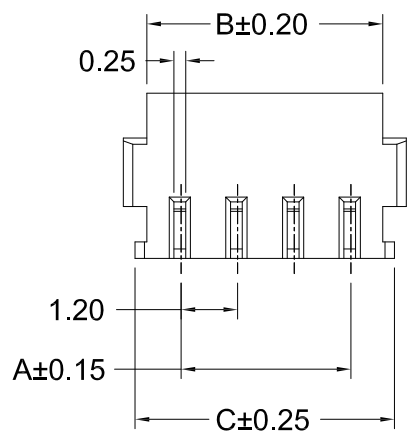


**ORDER INFORMATION:**

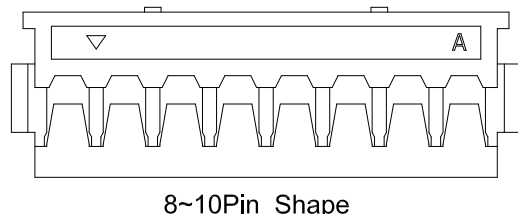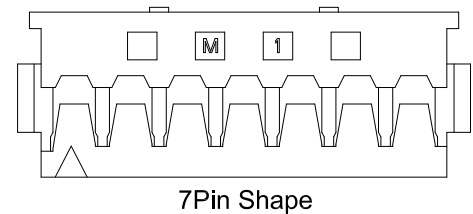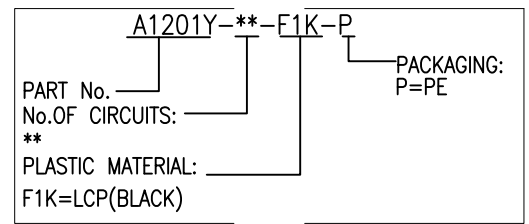

<b>東莞市高迪電子有限公司</b> DONG GUAN GAO DI ELECTRONICS CO., LTD		TITLE: 1.2mm housing	
		PART NO.: A1201Y-**-F1K-P	
GENERAL TOLERANCE		USE: CUSTOMER	
X. ±0.50	X. ±5'	APPD: 王锋	
X.X ±0.30	X.X ±2'	CHKD: 曾令青	
X.XX ±0.20	X.XX ±1'	DR: 蒋建银	
UNITS: mm		SCALE 1 : 1	SHEET 1 / 1




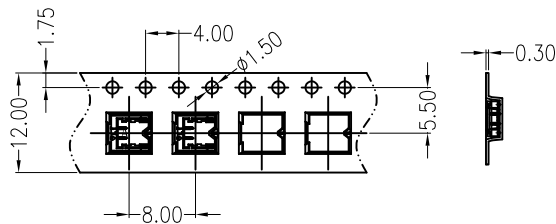


产品引出方向  
02~03 CONTACTS

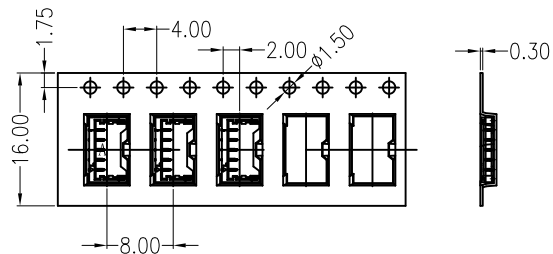

产品引出方向  
04~05 CONTACTS

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A		Release	蒋建银	2020.09.10

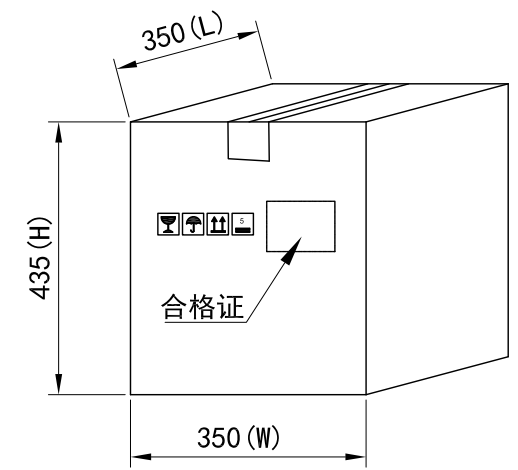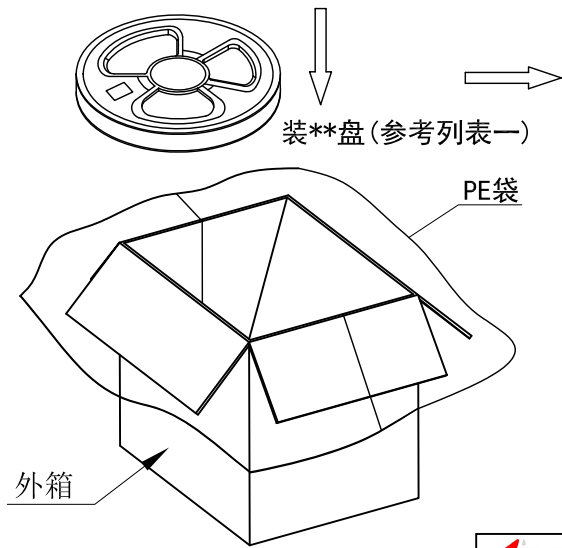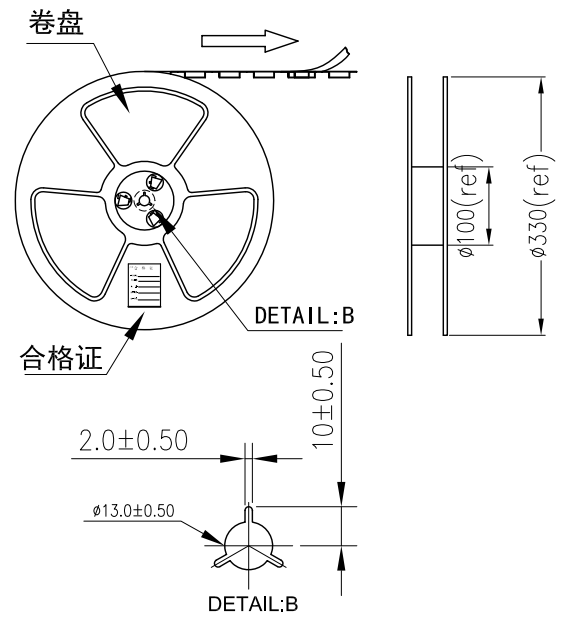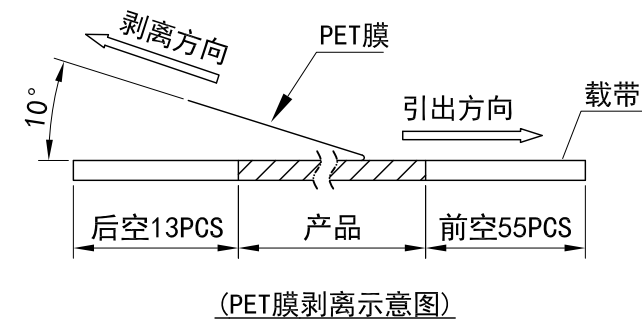

列表一

Circuits	DIM. D	DIM. E	Q'ty/Reel	Packing (Reel/Caton)
02~03PIN	-	12	4000PCS	25/Reel
04~05PIN	-	16	4000PCS	20/Reel

- 包装说明:
- 把成品包入卷盘中, 每盘装4000PCS, 卷盘上贴上合格证, 将装好产品的卷盘放进外箱中, 外箱内先套一个大PE袋, 外箱上贴贴上合格证.
  - 所有材料有害物控制需符合RoHS标准.

东莞市高迪电子有限公司  
DONG GUAN GAO DI ELECTRONICS CO., LTD

X.± 0.5	X.±'	USE: CUSTOMER	TITLE:
.X± 0.3	.X±'	APPD: 王锋	PART NO.:
.XX±0.25	.XX±'	CHKD: 曾令青	AWR-** 卷装规范
⊕	◁	UNITS: mm	DWG NO.:
		DR: 蒋建银	GCBZ-0864
			SCALE
			1 : 1
			SHEET
			1 / 1