



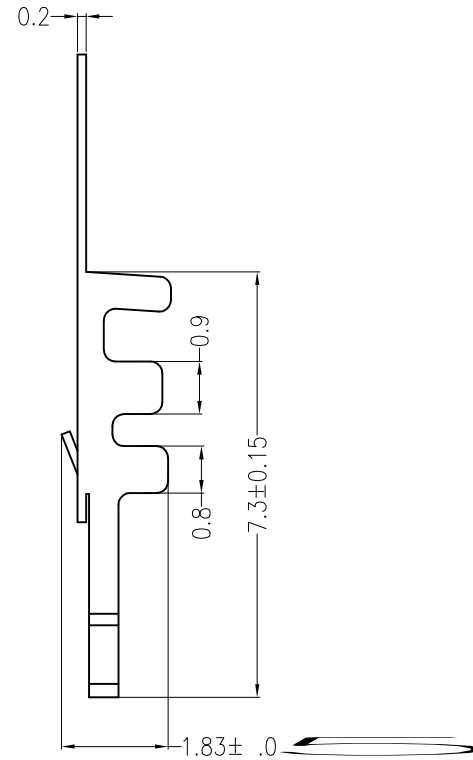


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	蒋建银	2018.01.18



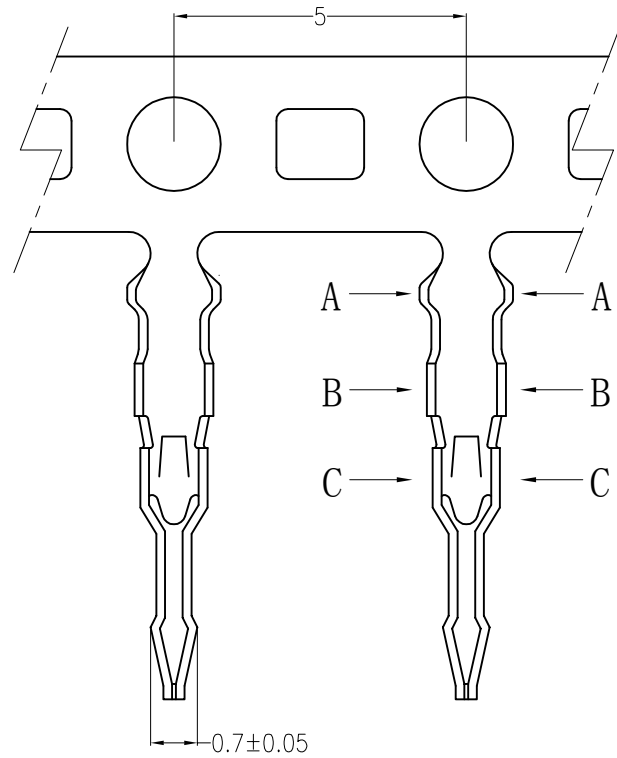


Ordering Information & Specification:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
B1501T-PA	AWG #26~#30	1.10mm(max)	Phosphor bronze	Tin-plated	/

<b>東莞市高迪電子有限公司</b> DONG GUAN GAO DI ELECTRONICS CO., LTD			TITLE:	
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.:	
.X±0.3	.X±2'		B1501T-PA	
.XX±0.25	.XX±1'	APPD: 邵敬和	DWG NO.:	
--	--	CHKD: 田峰	GCDZ-0017	
		UNITS: mm	DR: 蒋建银	SCALE 1 : 1
				SHEET 1 / 1

REV	DESCRIPTION	DESIGN	DATE
A0	Release	周秀龙	2017.11.22

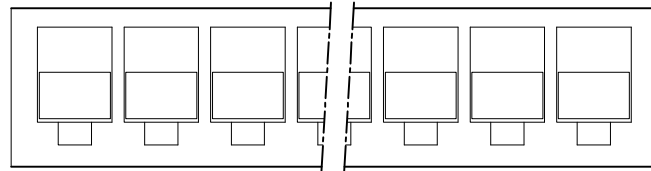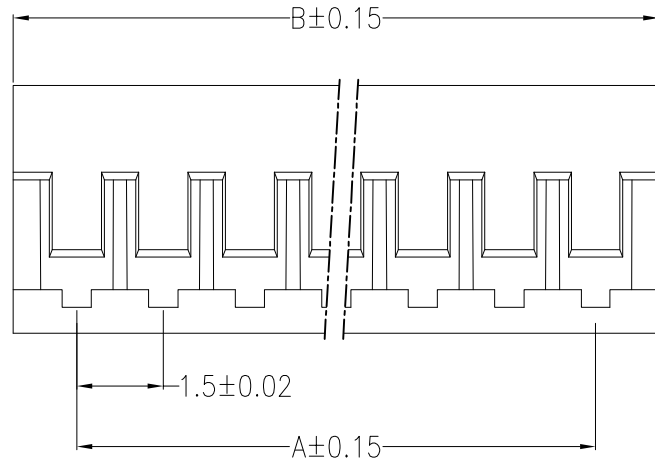

适用线规:32AWG~26AWG

主要技术参数 Main Specifications

线 数 (Poles): 02 to 20  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 250V AC DC  
 额定电流 (Rated current): 1.0A AC DC  
 耐 电 压 (Withstand Voltage): 500V AC/minute  
 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

<b>B1501Y-**-A5W-P</b>	
PART No.:	PACKAGING:
No. OF CIRCUITS:	P=PE
02~20	PLASTIC MATERIAL:
	A5W=PA66 (WHITE)

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
02	1.50	3.70	12	16.50	18.70
03	3.00	5.20	13	18.00	20.20
04	4.50	6.70	14	19.50	21.70
05	6.00	8.20	15	21.00	23.20
06	7.50	9.70	16	22.50	24.70
07	9.00	11.20	17	24.00	26.20
08	10.50	12.70	18	25.50	27.70
09	12.00	14.20	19	27.00	29.20
10	13.50	15.70	20	28.50	30.70
11	15.00	17.20			

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
A	PEDESTAL	1 PCS	PA66	COLOR:Beige
<b>东莞市高迪电子有限公司</b> <b>DONG GUAN GAO DI ELECTRONICS CO., LTD</b>				
TITLE: -				1.5mmPITCH Housing
X.±0.5	X.±5'	USE:	PART NO.:	
.X±0.3	.X±2'	CUSTOMER	B1501Y-**-A5W-P	
.XX±0.25	.XX±1'	APPD:	DWG NO.:	
--	--	邵敬和	GCCP-0583	
		CHKD:	SCALE	SHEET
UNITS:	mm	田峰	1 : 1	1 / 1
		DR:		
		周秀龙		