


**SPECIFICATION**

- 1. Rating : DC 24V 3.0A
- 2. Contact resistance :  $\leq 50m\Omega$
- 3. Insulation resistance :  $\geq 100M\Omega$
- 4. Withstand voltage : 500VAC
- 5. Insertion and extraction force : 3-30N
- 6. life test : 5,000 cycles

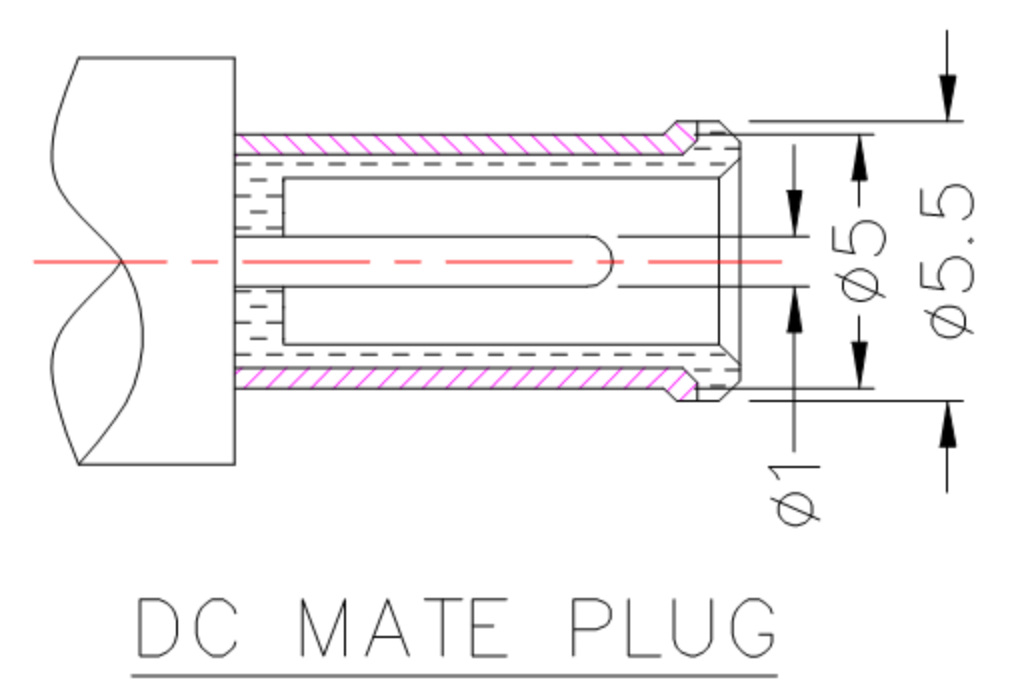

MODEL NO.	DC-092-1.0
SCHMATIC	

**\* MATERIAL**

- TERMINAL 1 : BRASS(Matte Tin Plated)
- TERMINAL 2 : PHOSPHOR BRONZE(Matte Tin Plated)
- TERMINAL 3 : BRASS(Matte Tin Plated)
- HOUSING : PA66




3	更新MODLE	Jack	120314
2	新增端子鍍層	Jack	111214
1	新增SPEC	Jack	081214
ITEM NO.	DESCRIPTION	DRAWN	DATE

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	$\pm 0.2$
Above 5 ~ 15	$\pm 0.3$
Above 15 ~ 30	$\pm 0.4$
Above 30 ~ 50	$\pm 0.5$
Angle	$\pm 0.3^\circ$

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	12/03/14
CHECKED BY:	DATE
Jacky Chen	12/03/14
APPROVED BY:	DATE
Tony Kao	12/03/14

MAT'L	TITLE	JACK
FINISH	MODLE	DC JACK 端子鍍霧錫
SCALE	DWG NO.	DC-092-1.0-TN
SHEET NO.	PART NO.	DC-092-1.0-TN
1 of 1		

SIZE	A4
VER	R3