



转换型SPDT

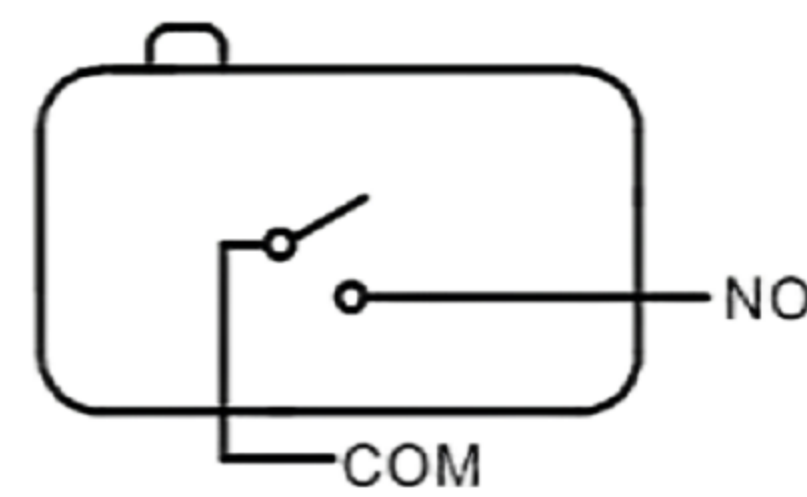

常开型SPST-NO

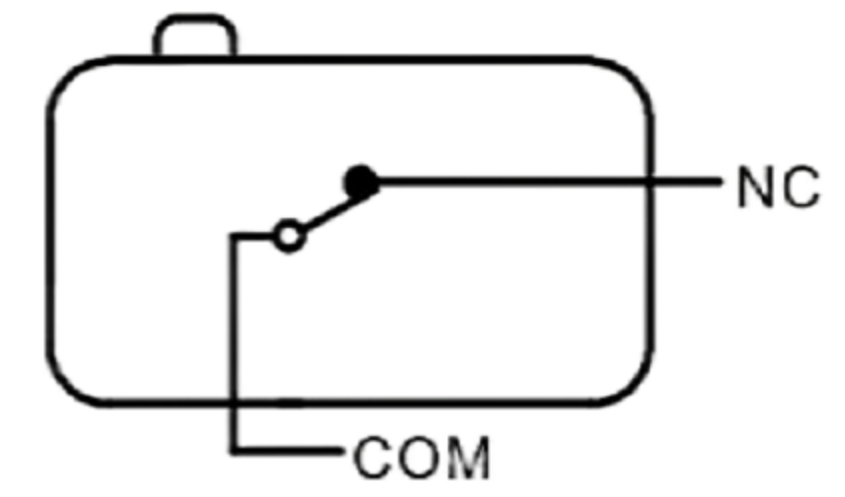

常闭型SPST-NC

晾衣架开关

- 1.微动开关型号 MICRO SWITCH MODEL: LXW-3-6-1A-J3S-R1W1
- 2.快插端子 QUICK CONNECTOR TYPE;
单刀双掷 SINGLE POLE DOUBLE THROW
- 3.额定值 RATING: ▲16A 125/250VAC μ 25T125
- 4.接触电阻 CONTACT RESISTANCE: <50mΩ (INITIAL)
- 5.绝缘电阻 INSULATION RESISTANCE: ≥100MΩ(DC500V/1MIN)
- 6.介电强度 DIELECTRIC STRENGTH: 1500V /5mA /1MIN
- 7.机械寿命 MECHANICAL LIFE: >100000 CYCLES
- 8.电气寿命 ELECTRICAL LIFE: >10000 CYCLES
- 9.端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX260°C, 3S
- 10.操作力 OPERATION FORCE:150±50gf
- 11.所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT

东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED: Up to 5 ±0.2, Above 5 ~ 15 ±0.3, Above 15 ~ 30 ±0.4, Above 30 ~ 50 ±0.5, Angle ±0.3°

3RD. ANGEL'S UNITS MM

DRAWN BY: Ming Ming Zou	DATE 10/31/13	MAT'L	TITLE SWITCH	
CHECKED BY: Ning Ning Su	DATE 10/31/13	FINISH	MODLE MICRO SWITCH	
APPROVED BY: Jia Xiang	DATE 10/31/13	SCALE 1:1	DWG NO. GD-LXW-3-6-1A-J3S-R1W	SIZE A4
		SHEET NO. 1 of 1	PART NO.	VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE