



转换型SPDT

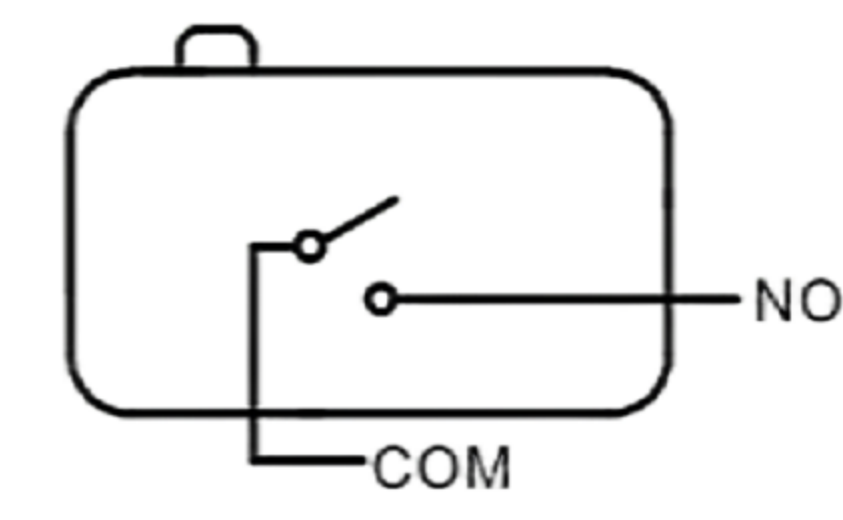


常开型SPST-NO

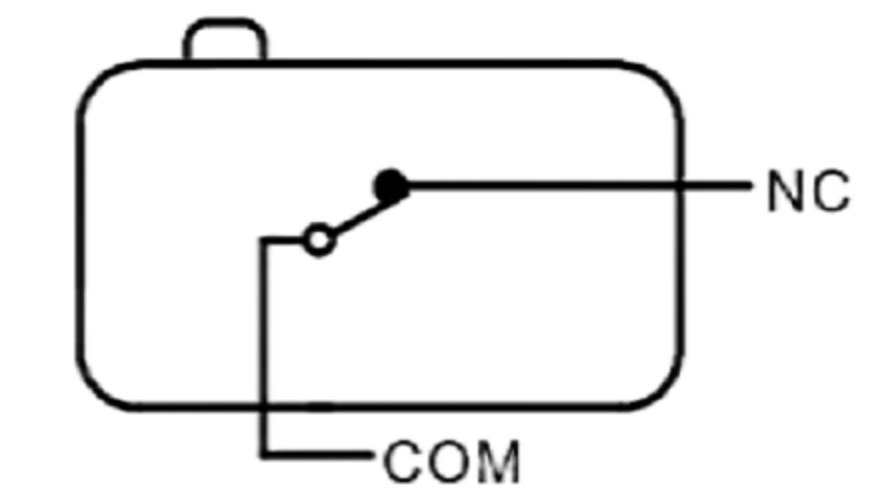


常闭型SPST-NC

晾衣架开关

- 1.微动开关型号 MICRO SWITCH MODEL: LXW-3-6-1A-J5S-R1
- 2.快插端子 QUICK CONNECTOR TYPE:
单刀双掷 SINGLE POLE DOUBLE THROW
- 3.额定值 RATING: ▲16A 125/250VAC μ 25T125
- 4.接触电阻 CONTACT RESISTANCE: <50mΩ (INITIAL)
- 5.绝缘电阻 INSULATION RESISTANCE: ≥100MΩ(DC500V/1MIN)
- 6.介电强度 DIELECTRIC STRENGTH: 1500V /5mA /1MIN
- 7.机械寿命 MECHANICAL LIFE: >100000 CYCLES
- 8.电气寿命 ELECTRICAL LIFE: >10000 CYCLES
- 9.端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX260°C, 3S
- 10.操作力 OPERATION FORCE: 150±50gf
- 11.所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT

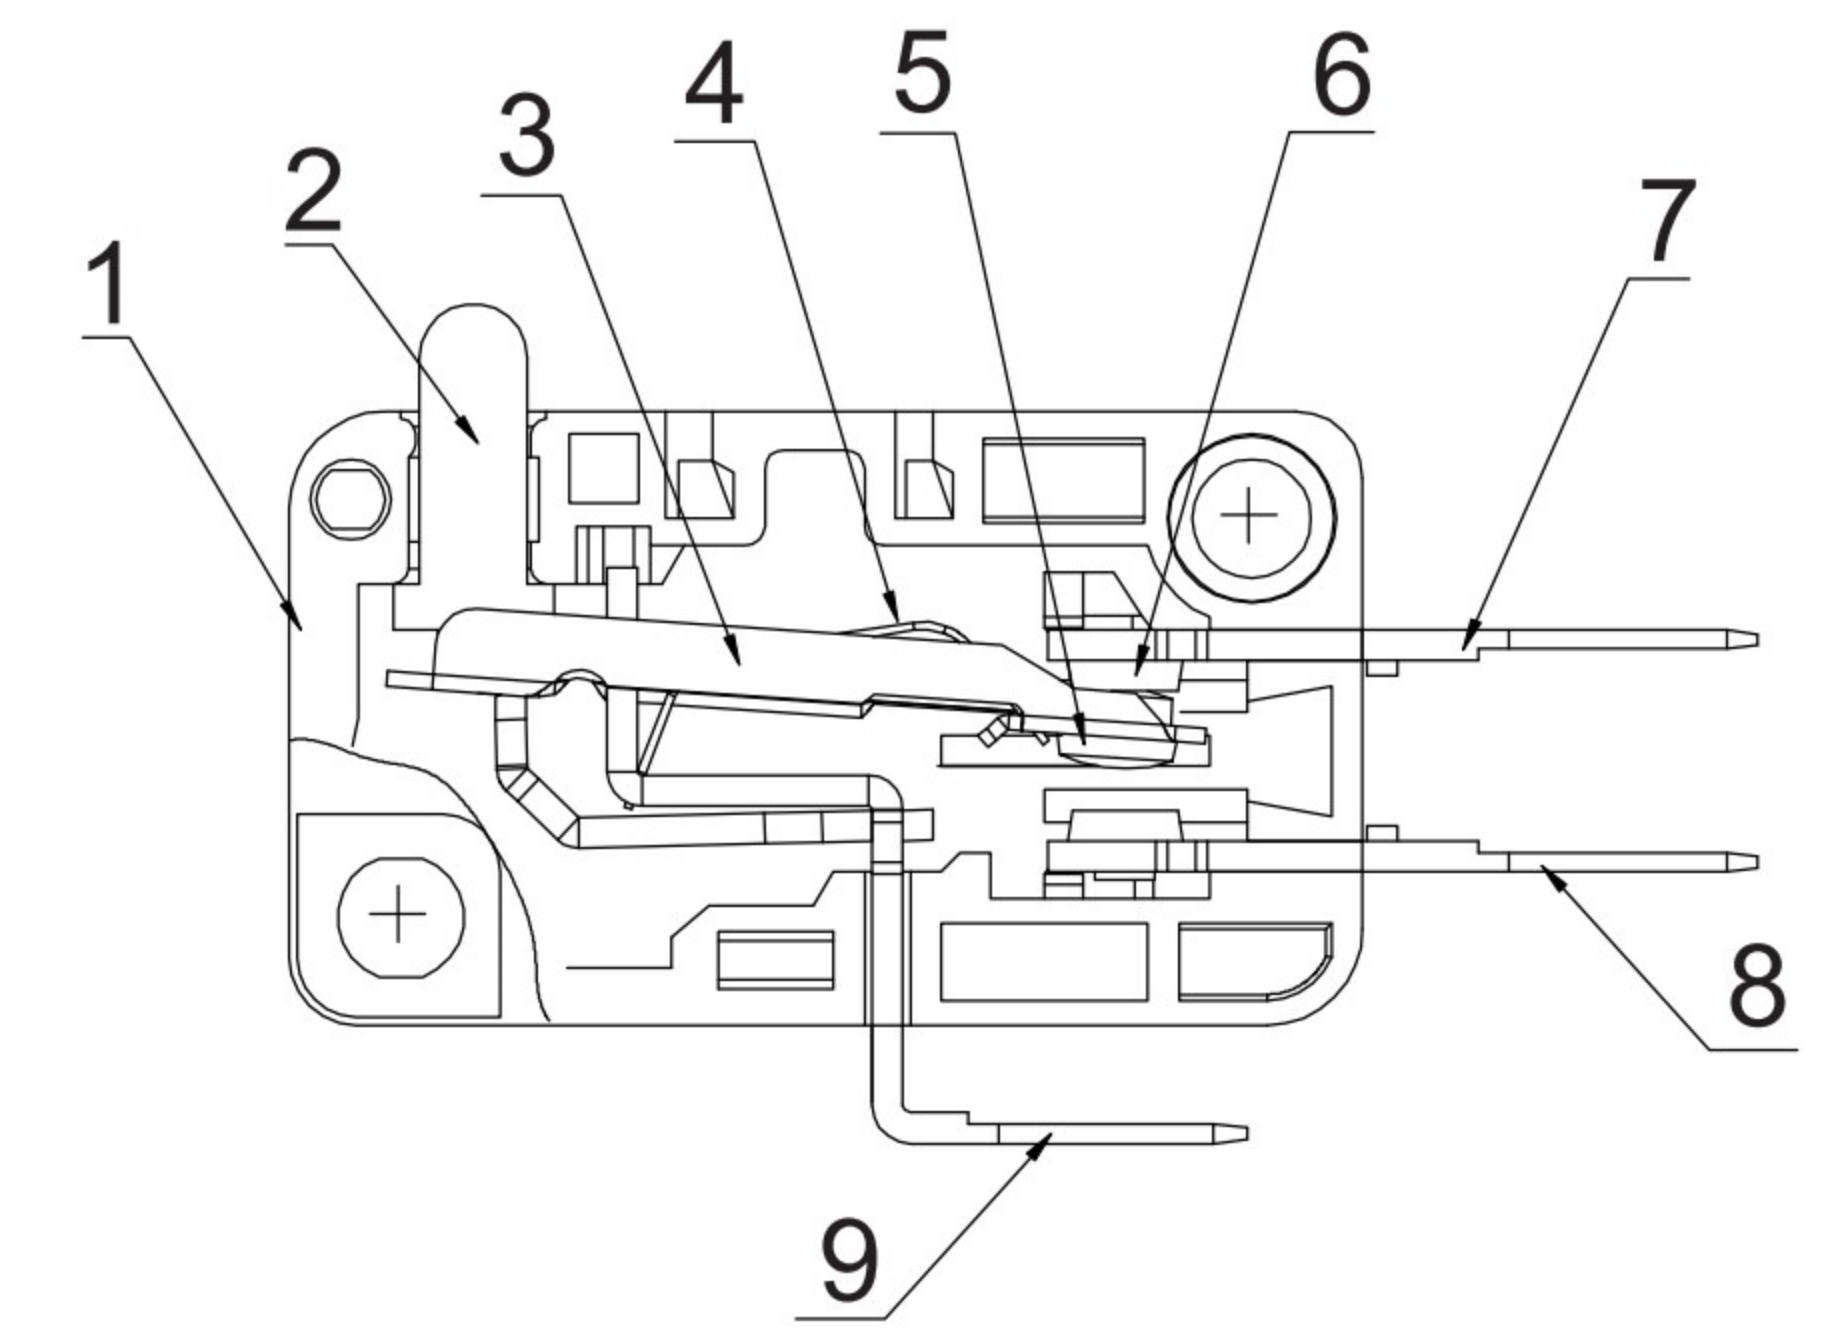

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 ±0.2	Above 5 ~ 15 ±0.3	Above 15 ~ 30 ±0.4	Above 30 ~ 50 ±0.5	Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
------------------------------------	--------------	-------------------	--------------------	--------------------	-------------	--------------	---	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Ming Ming Zou	10/31/13		MODLE	MICRO SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	GD-LXW-3-6-1A-J5S-R1
Ning Ning Su	10/31/13	1:1	PART NO.	
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Jia Xiang	10/31/13			
				SIZE A4
				VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE