


SCHEMATIC



防水微动开关

- 1.微动开关型号 MICRO SWITCH MODEL: LXW-3-6-5C-AS
- 2.焊线端子 SOLDER CONNECTOR TYPE;
单刀双掷 SINGLE POLE DOUBLE THROW
- 3.额定值 RATING: ▲10A 125/250VAC μ 25T85 CCC N 17
5A 125/250VAC μ 25T85
▲10A 125/250VAC μ 25T85 UL
▲10.1A 125/250VAC μ T125
- 4.接触电阻 CONTACT RESISTANCE: <50mΩ (INITIAL)
- 5.绝缘电阻 INSULATION RESISTANCE: ≥100MΩ(DC500V/1MIN)
- 6.介电强度 DIELECTRIC STRENGTH: 1500V /5mA /1MIN
- 7.机械寿命 MECHANICAL LIFE: >100000 CYCLES
- 8.电气寿命 ELECTRICAL LIFE: >10000 CYCLES
- 9.端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX260°C, 3S
- 10.操作力 OPERATION FORCE: 250±50gf
- 11.所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT

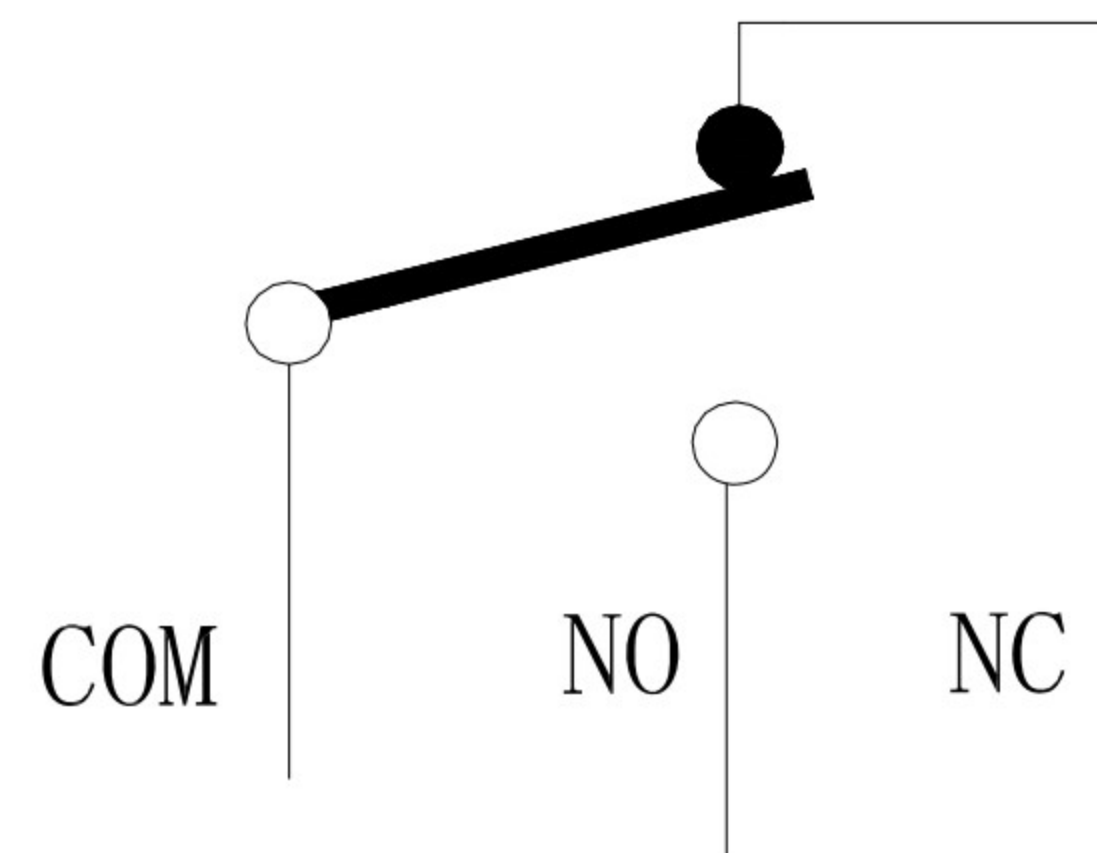

东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY: DATE
Ming Ming Zou 10/31/13

CHECKED BY: DATE
Ning Ning Su 10/31/13

APPROVED BY: DATE
Jia Xiang 10/31/13

MAT'L		TITLE	SWITCH
FINISH		MODLE	MICRO SWITCH
SCALE	1:1	DWG NO.	GD-LXW-3-65C-AS
SHEET NO.	1 of 1	PART NO.	

SIZE
A4
VER
R