
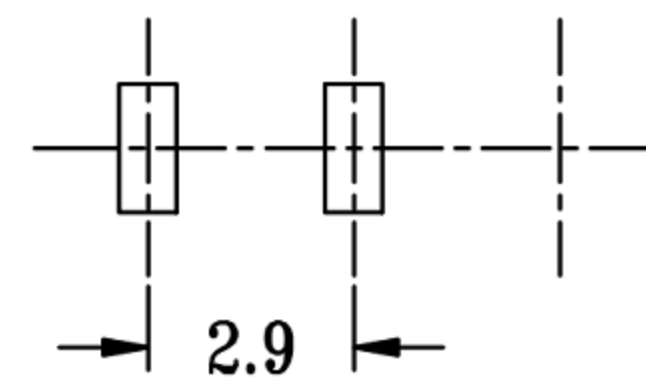


SCHEMATIC

X(mm)
2mm
3mm
4mm
5mm
6mm
7mm
8mm
9mm

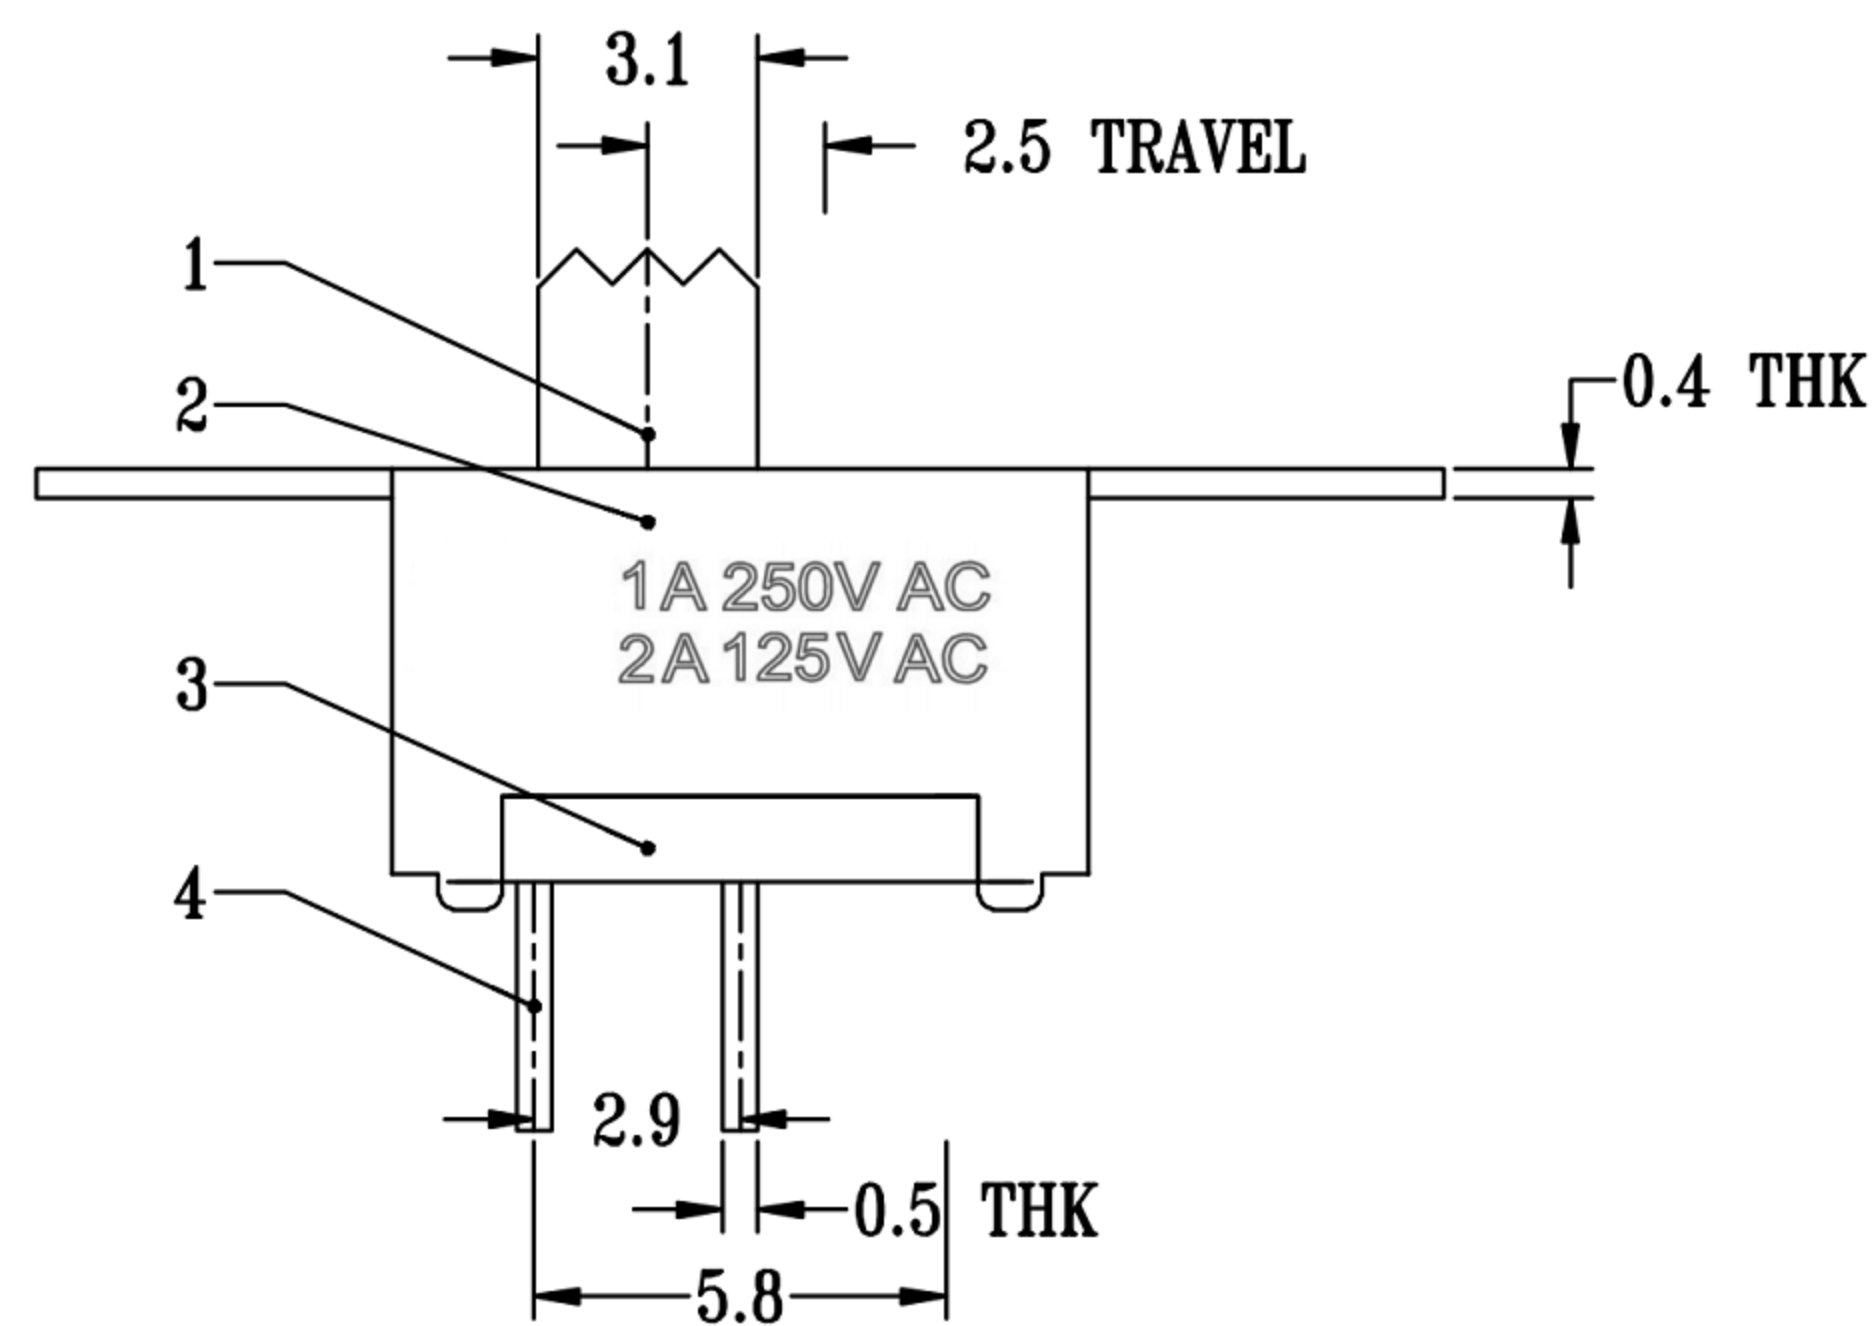

P.C.B LAYOUT  
BOTTOM VIEW

SPECIFICATIONS

SPECIFICATION (INITIAL)	
RATING:	1A 2A 125V 250 AC
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ at 1500V DC
WITHSTAND VOLTAGE:AC	500V for 1 min
OPERATION FORCE:	300±100g
SWITCHING LIFE:	10000 Cycles(6-10c/m loading)

NO.	PARTS	MATERIALS	QTY	FINISH
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED
4	TERMINAL	BRASS	3	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	Ni PLATED
1	KNOB	POM	1	BLACK



**東莞市高迪電子有限公司**  
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:  
Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Ming Ming Zou	11/19/14			
CHECKED BY:	DATE	FINISH	MODLE	SLIDE SWITCH
Ming Ning Su	11/19/14			
APPROVED BY:	DATE	SCALE	DWG NO.	GD-SS-12E88-2P-E
Jia Xiang	11/19/14	1:1	PART NO.	
		SHEET NO.	1 of 1	

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	新增SPEC	Jack	111914
1	新增尺寸	Jack	061614

SIZE  
A4  
VER  
R2