
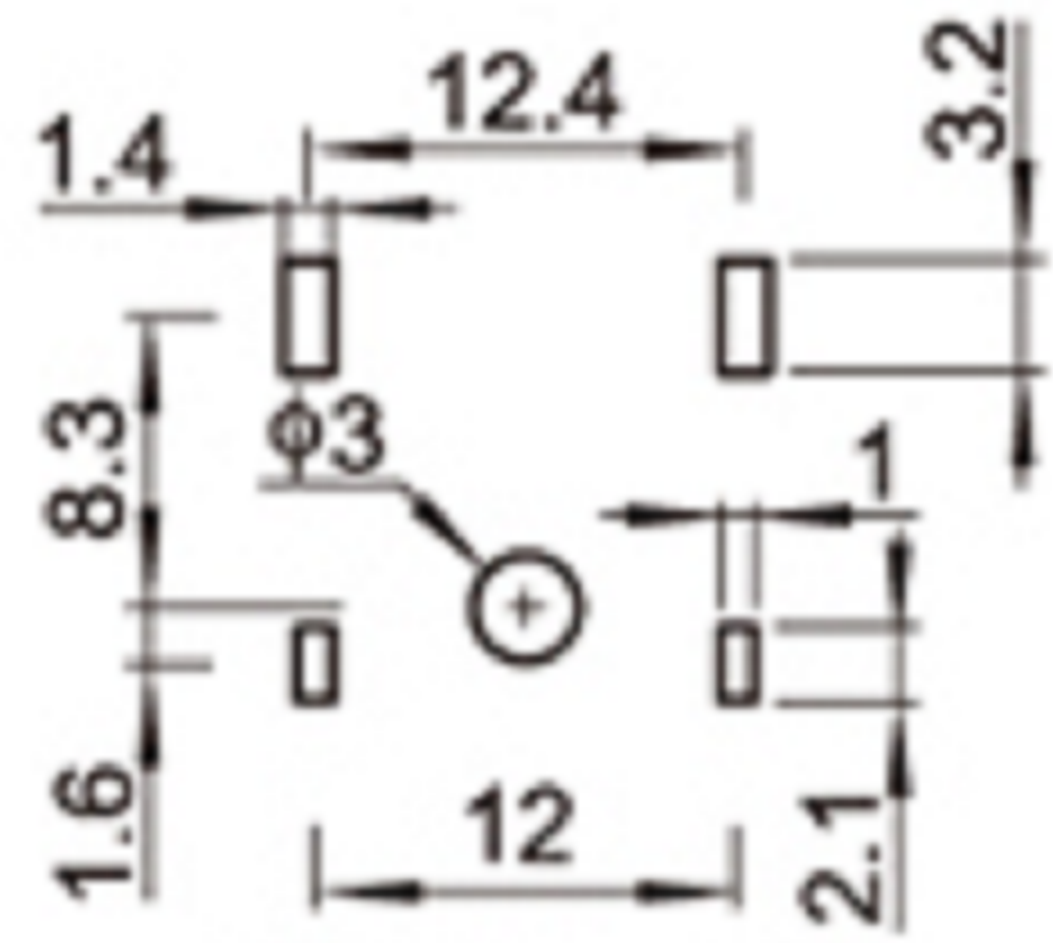


PANEL CUT-OUT

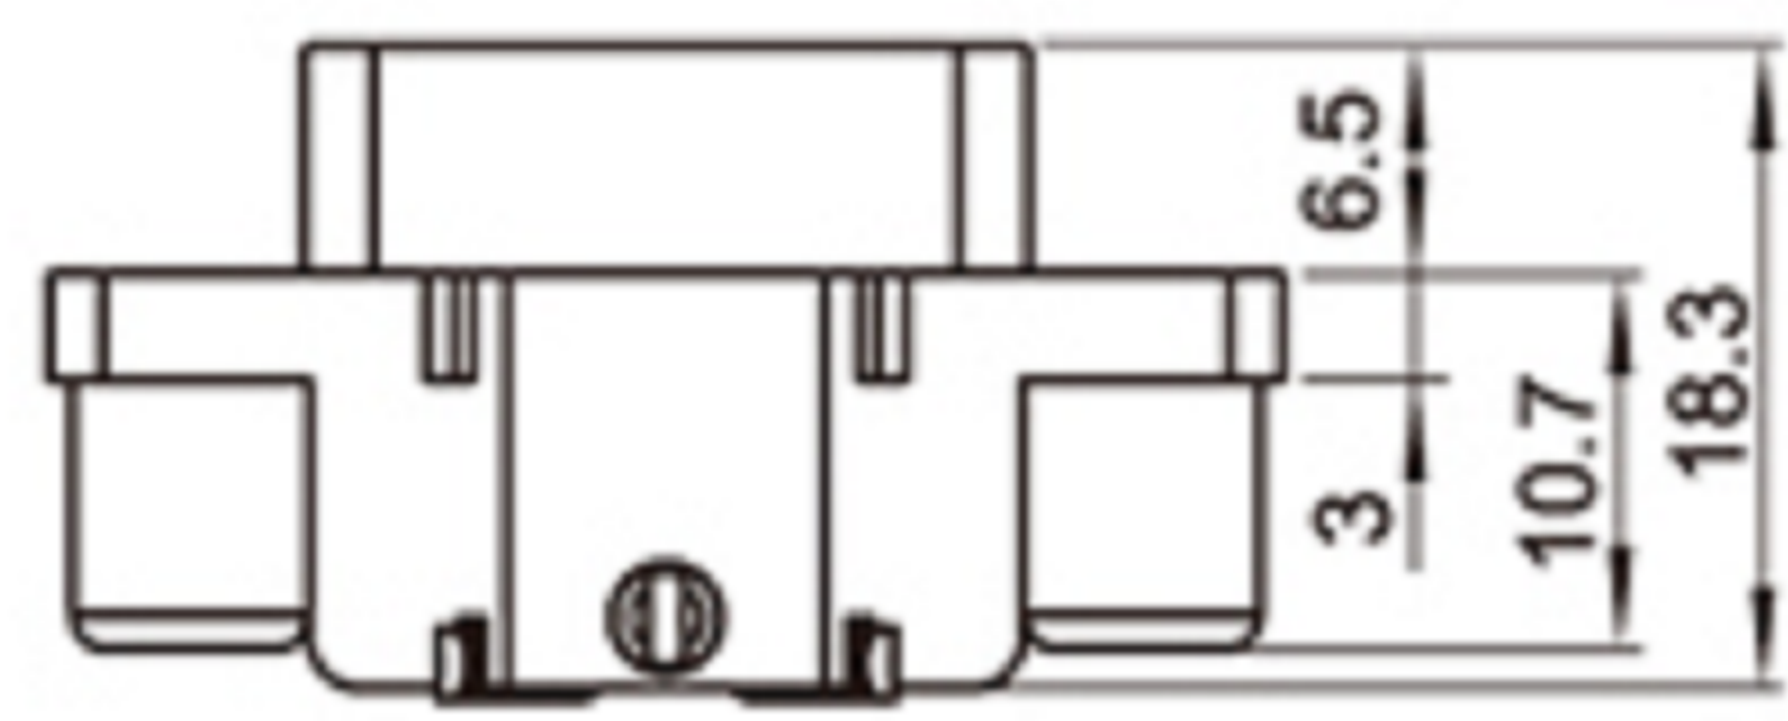


PANEL Layout

产品类型特性

- 1. AC插座 材质
- 2. 塑胶件 PA66
- 3. 插销 黄铜镀镍
- 4. 端子 黄铜镀锡
- 1. 使用温度范围: $-10^{\circ}\text{C} \pm 70^{\circ}\text{C}$
- 2. 额定值: 2.5A/5A/7A AC 125V 250V AC
- 3. 绝缘电阻: $100\text{M}\Omega$
- 4. 耐电压: 2500V AC
- 5. 接触电阻: $30\text{M}\Omega$
- 6. 寿命: 10000次
- 结构特性 插拔力: $13.6\text{N} \sim 68\text{N}$
- 端子强度: 60N
- 盐雾测试: $35 \pm 2^{\circ}\text{C}$ 24/h
- 耐环境性能 耐寒性能 $-20 \pm 2^{\circ}\text{C}$ 96/h
- 耐热性能 $100 \pm 2^{\circ}\text{C}$ 96/h
- 耐湿性能 $40 \pm 2^{\circ}\text{C}$ 相对湿度90~95% 96/h

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ± 0.2
 Above 5 ~ 15 ± 0.3
 Above 15 ~ 30 ± 0.4
 Above 30 ~ 50 ± 0.5
 Angle $\pm 0.3^{\circ}$

3RD. ANGEL'S  UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Ming Ming Zou	10/31/13			
CHECKED BY:	DATE	FINISH	MODLE	AC POWER SOCKET
Ning Ning Su	10/31/13			
APPROVED BY:	DATE	SCALE	DWG NO.	GD-DB-V5-8-7
Jia Xiang	10/31/13	1:1		
SHEET NO.	1 of 1	PART NO.		
				SIZE A4
				VER R