
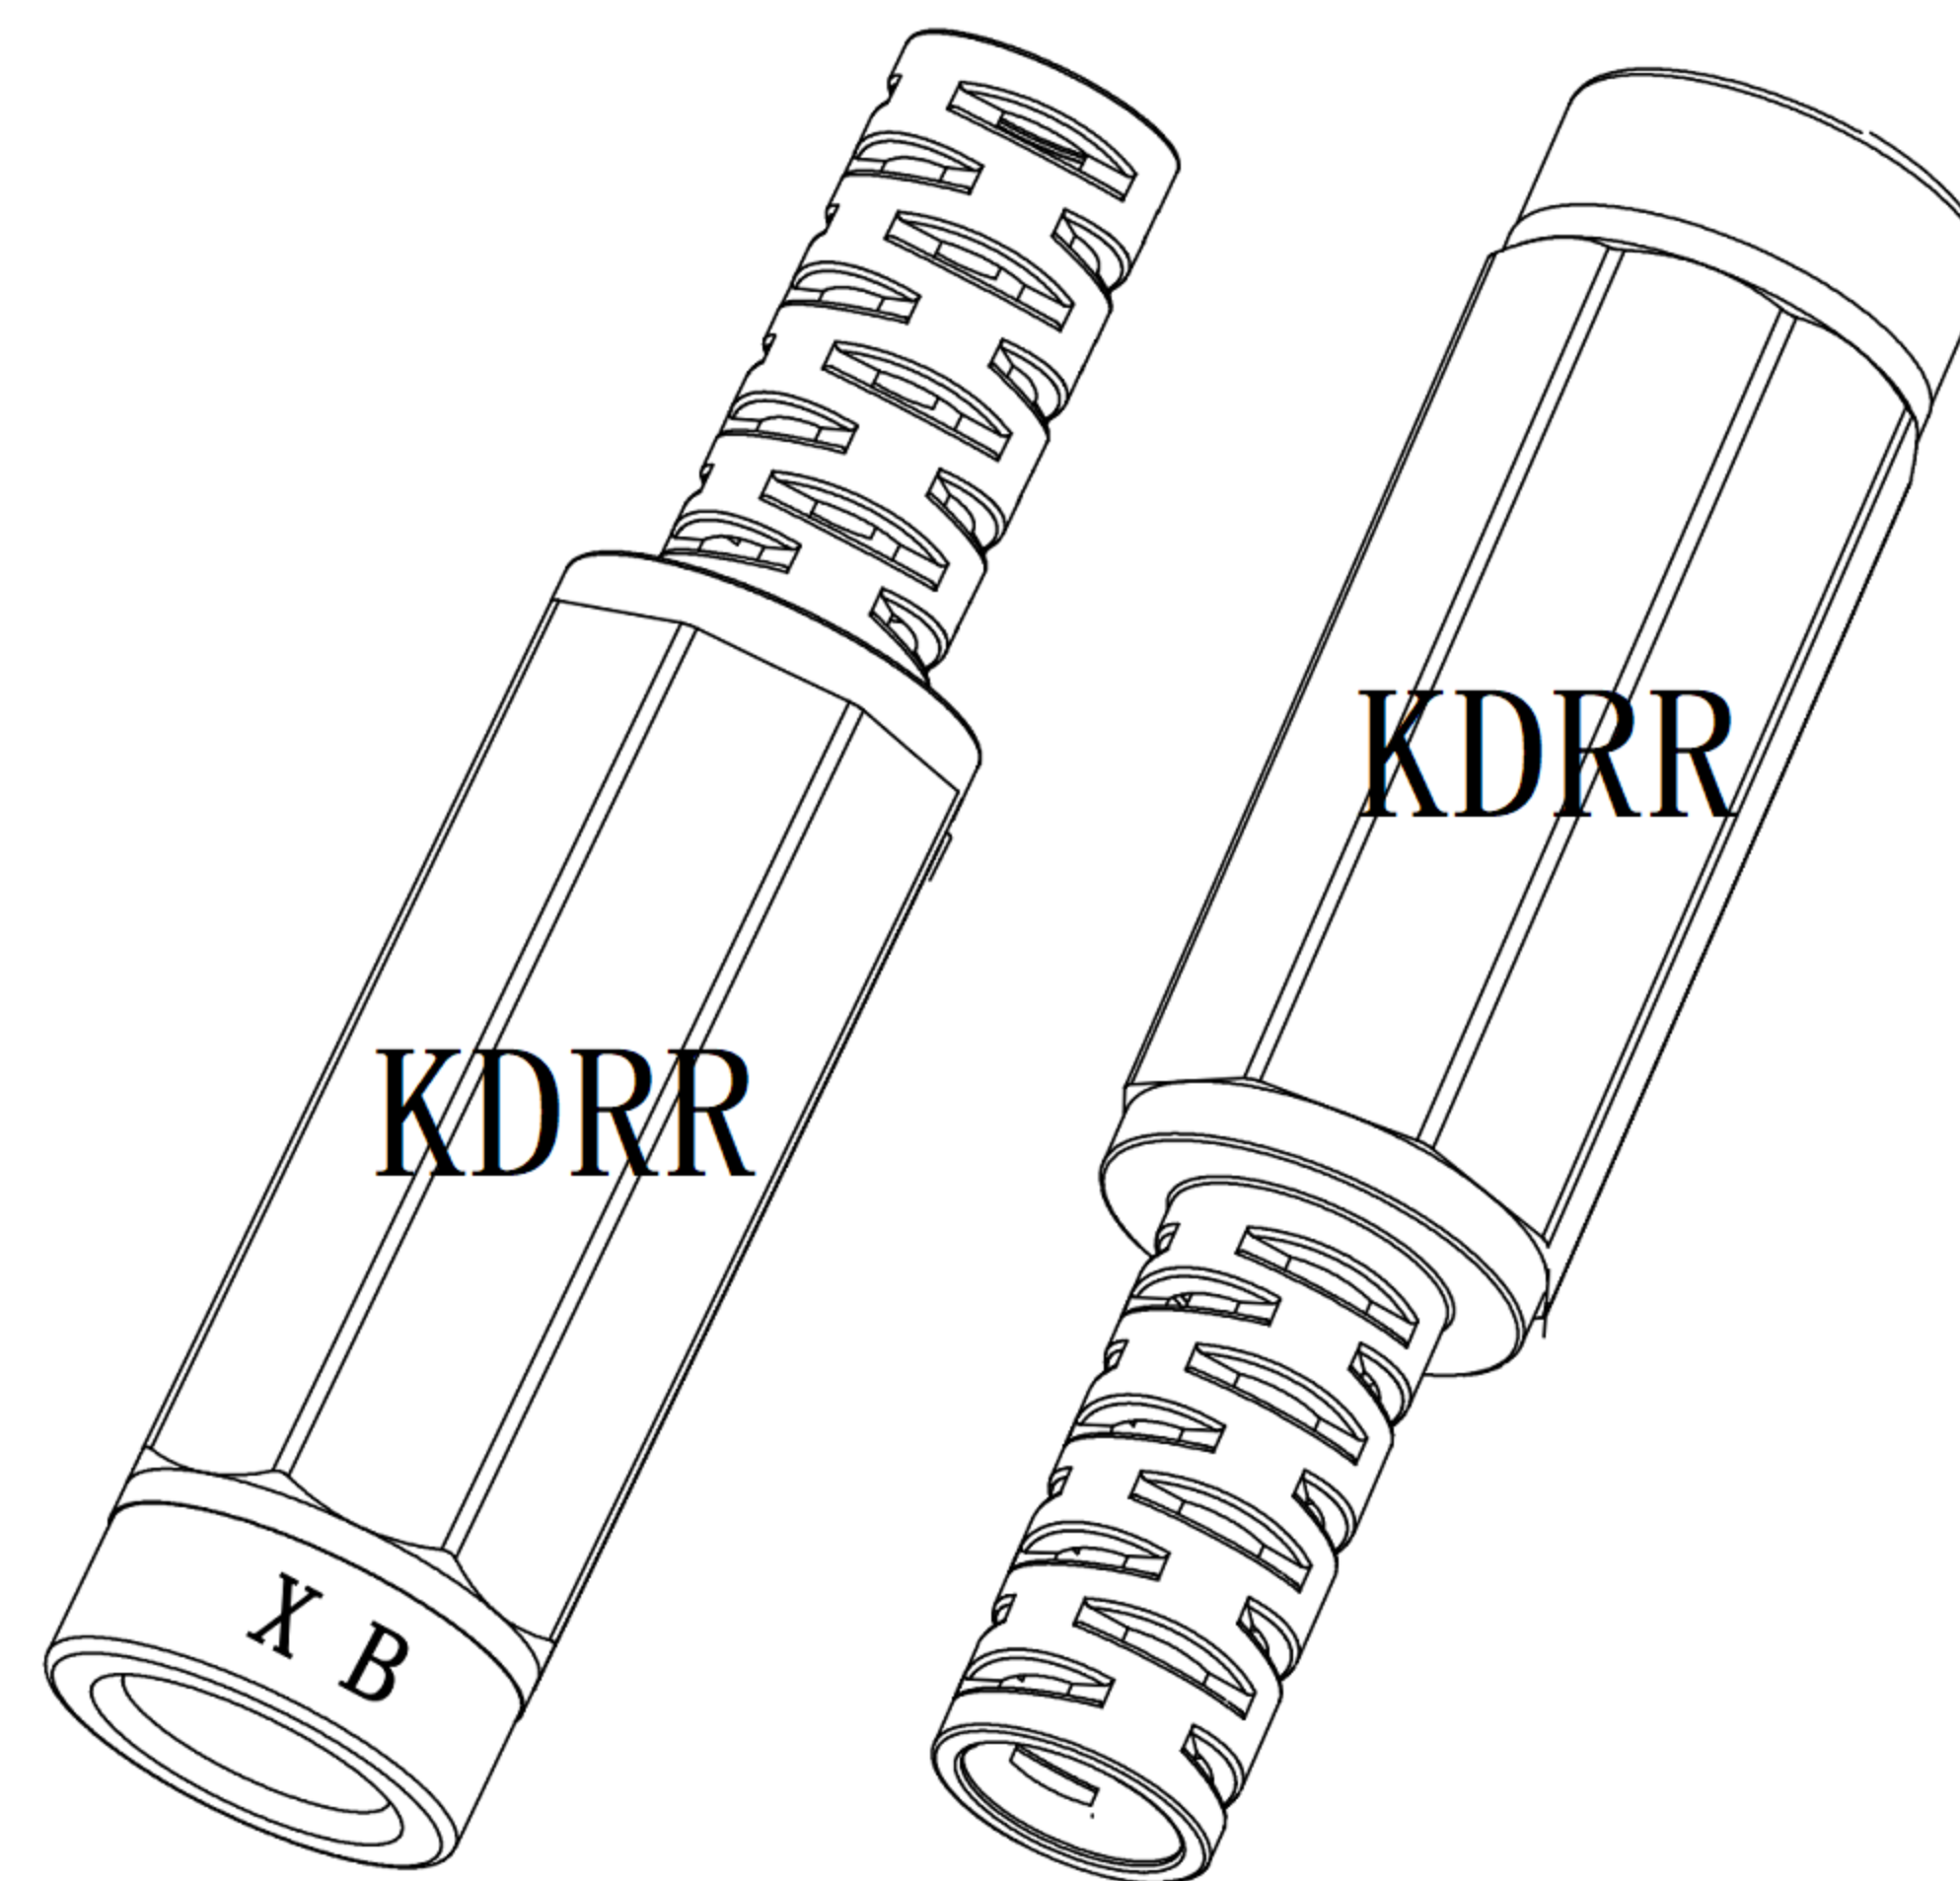



DC MATE PLUG

SCHEMATIC

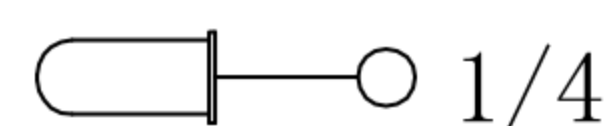

PIN	φ 2.0	φ 2.5
APPD		

SPECIFICATION

1. Rating : DC 3A 5A 12V 24V
2. Contact resistance : $\leq 30m\Omega$;
3. Insulation resistance : $\geq 100M\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion force : 3-30N;
extraction force : 3-30N;
6. life test : 5,000 cycles .



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY: Ming Ming Zou
 CHECKED BY: Ning Ning Su
 APPROVED BY: Jia Xiang

DATE: 6/8/23
 DATE: 6/8/23
 DATE: 6/8/23

MAT'L	TITLE	JACK
FINISH	MODLE	DC JACK
SCALE	DWG NO.	
SHEET NO.	PART NO.	
1 : 1		
1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新材質	Jack	050420
3	更新尺寸	Jack	121119
2	更新尺寸標示位置	Jack	082719
1	更新尺寸	Jack	080519

SIZE A4
 VER R4