
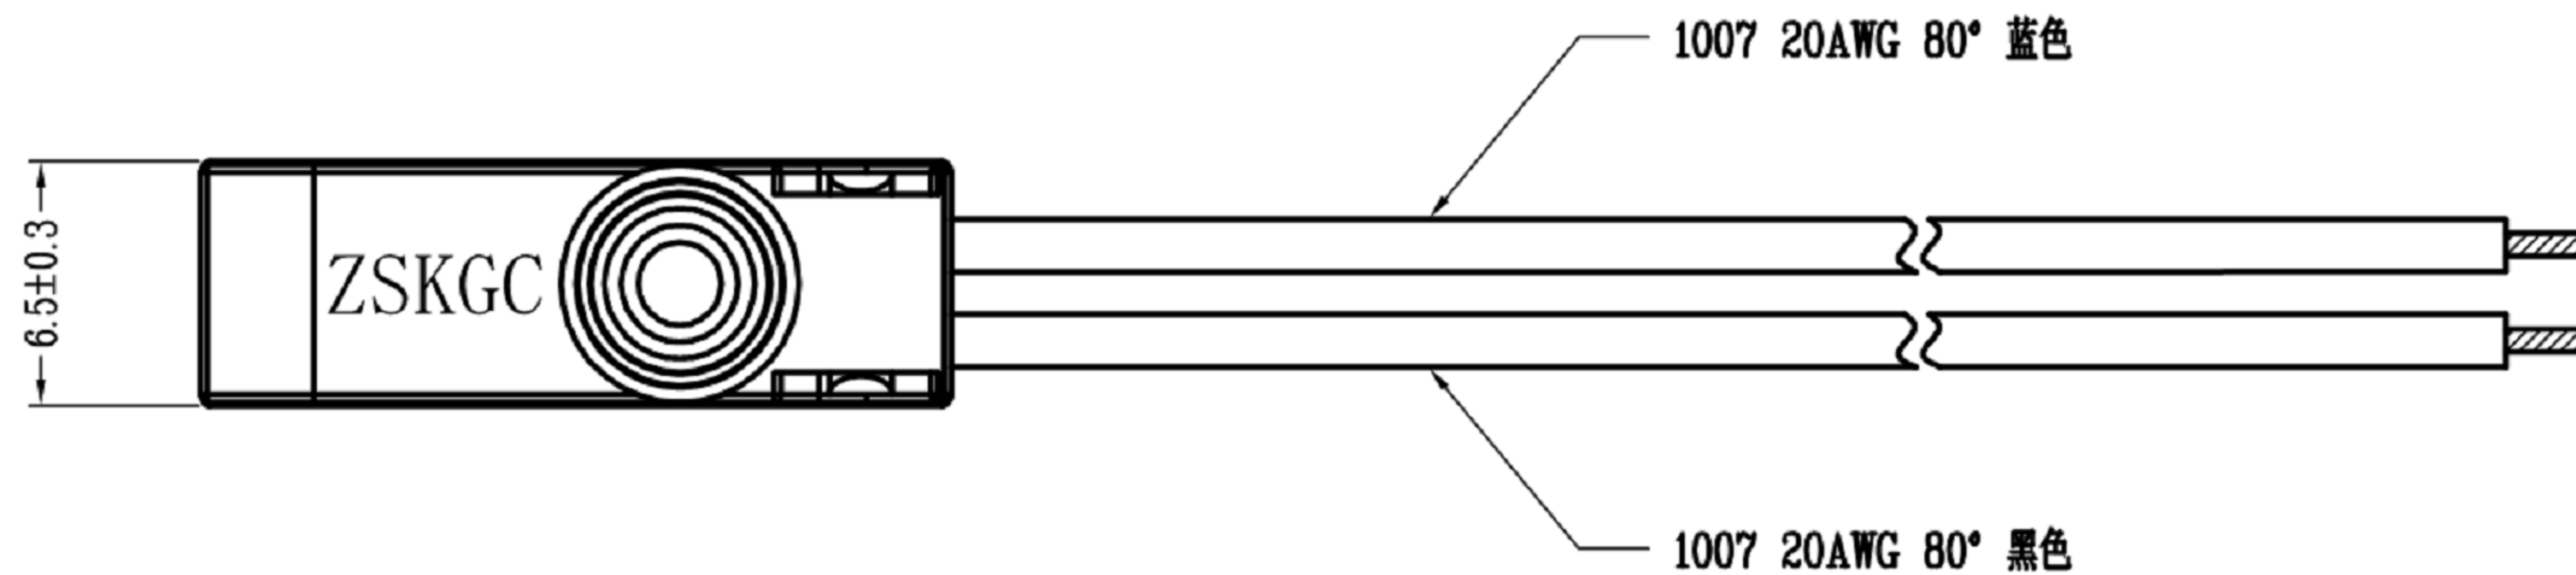


3. 电路简图

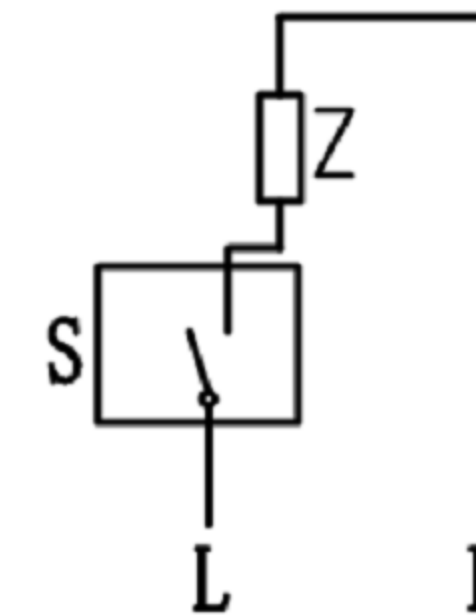

1. 技术参数 (Technical Parameters)

序号	主要技术参数(Main Technical Parameters)
1	电气额定值(Electrical Rating): 0.5A 5VDC/10(3)A 250VAC
2	电气寿命(Electrical lifetime): 5E4 cycles/1E4 cycles
3	机械寿命(Mechanical lifetime): Min.1000000 cycles
4	接触电阻(Contact Resistance): ≤300mΩ
5	操作力(Operating force): 1.0~3.5N(推动子处测量)
6	自由位置(Free position): 9.3mm(Max)
7	动作位置(Operating position): 8.4±0.5mm
8	耐压(Withstand Voltage): 脚与脚 750V/5S/5mA;脚与壳 1500/5S/5mA
9	绝缘电阻(Insulation Resistance): ≥100MΩ (Test Voltage 500VDC)
10	漏电起痕指数Proof Tracking Index (PTI): 175V
11	环境温度(Ambient temperature): 40T125°
12	防护等级: IP67

2. 认证:

CQC 10(3)A 250VAC 0.5A 5VDC 40T125μ

cULus 10.1(3)A 125/250V~ 6A 36VDC 40T125μ

东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY: Ming Ming Zou	DATE 07/23/13	MAT'L	TITLE Waterproof micro movement
CHECKED BY: Ning Ning Su	DATE 07/23/13	FINISH	MODLE Waterproof micro movement
APPROVED BY: Jia Xiang	DATE 07/23/13	SCALE 1:1	DWG NO.
SHEET NO. 1 of 1		PART NO.	SIZE A4
			VER R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	公差及料號更新	Jack	072313
1	圖面更新	Frank Wu	021012