

2. 认证:




0.1A 125/250VAC
0.1A 48VDC
3A 12VDC
40T130 μ 1E5



0.1A 250VAC
0.1A 48VDC
3A 36VDC
40T130 μ 5E4

3. 电路简图

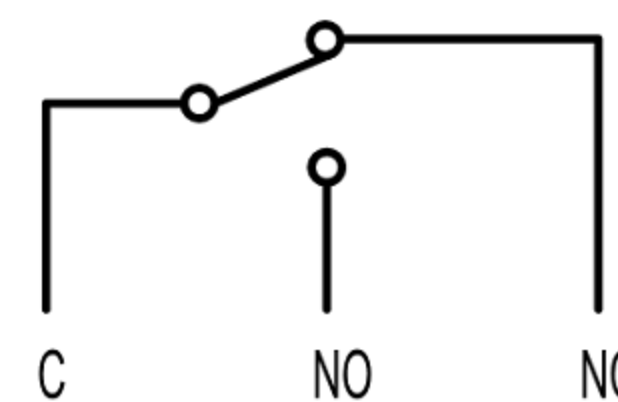

1. 技术参数 (Technical Parameters)

序号	主要技术参数 (Main Technical Parameters)
1	电气额定值 (Electrical Rating): 0.1A 125/250VAC; 3A/12VDC
2	环境温度 (Ambient temperature): 40T130
3	电气寿命 (Electrical lifetime): 5E4 cycles
4	操作力 (Operating force): 3.0N MAX
5	自由位置 (OP): 7.7±0.3mm (推动子上测)
6	动作位置 (OP): 7.2±0.5mm (推动子上测)
7	接触电阻 (Contact Resistance): ≤50mΩ (不带线)
8	耐压 (Withstand Voltage): 脚与脚500V/60S/5mA, 脚与壳1500V/60S/5mA
9	绝缘电阻 (Insulation Resistance): ≥100MΩ (Test Voltage 500VDC)
10	防护等级: IP67




东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY: DATE
Ming Ming Zou 07/23/13
CHECKED BY: DATE
Ning Ning Su 07/23/13
APPROVED BY: DATE
Jia Xiang 07/23/13

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

Waterproof micro movement
Waterproof micro movement
GD-FSK-20-242
1 of 1

SIZE
A4
VER
R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	公差及料號更新	Jack	072313
1	圖面更新	Frank Wu	021012