
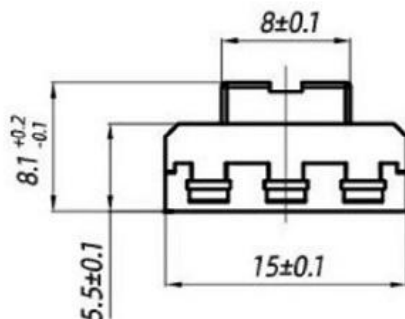
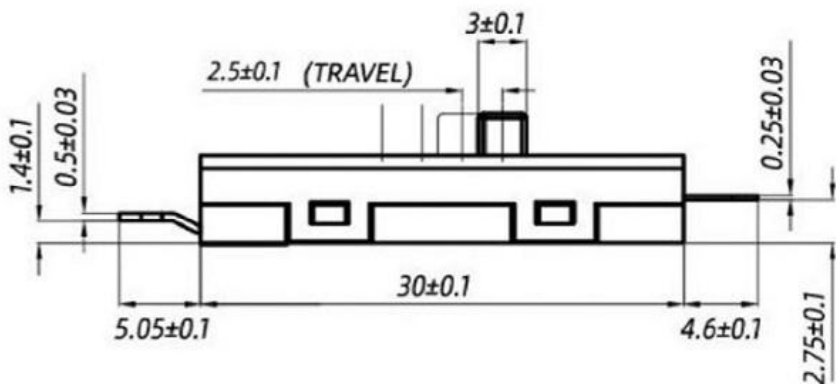


电流电路  
CURRENT CIRCUIT

CIRCUIT:007D

位置 POSITION	电路 CIRCUIT
1 (INITIAL) 起始	OFF
2	C2+2
3	C1+1; C2+3
4	C1+1; C2+2+3

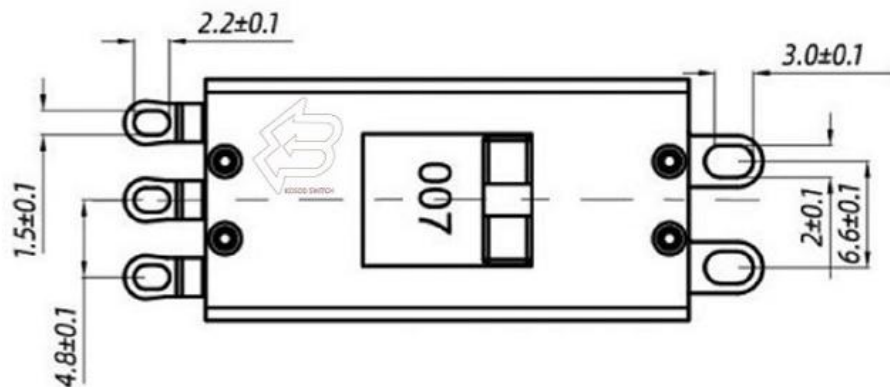


四档滑动开关

- 滑动开关型号 SLIDE SWITCH MODEL: KND-1-CS007D
- 焊线端子 SOLDER CONNECTOR TYPE;  
双刀四掷 . 多回路 DOUBLE POLE FOUR THROW, MULTI-CIRCUIT
- 额定值 RATING: 16(4)A 125/250VAC  $\mu$ T105  
10(2)A 125/250VAC  $\mu$ T85  
7(2)A 125/250VAC  $\mu$ T85  
5(1)A 125/250VAC  $\mu$ T85
- 接触电阻 CONTACT RESISTANCE: <50m $\Omega$  (INITIAL)
- 绝缘电阻 INSULATION RESISTANCE:  $\geq$ 100M $\Omega$ (DC500V/1MIN)
- 介电强度 DIELECTRIC STRENGTH: 1500V /5mA /1MIN
- 机械寿命 MECHANICAL LIFE: >100000 CYCLES
- 电气寿命 ELECTRICAL LIFE: >50000 CYCLES
- 端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX260°C. 3S
- 操作力 OPERATION FORCE: 350 $\pm$ 150gf



线路图  
CIRCUIT DIAGRAM

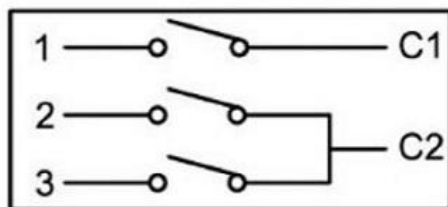

NO.	PARTS	MATERIALS	QTY	FINISH
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED
4	TERMINAL	BRASS	3	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	Ni PLATED
1	KNOB	POM	1	BLACK

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	新增SPEC	Jack	11/19/14
1	新增尺寸	Jack	06/16/14



东莞市高迪电子有限公司  
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:  
Up to 5  $\pm$ 0.2  
Above 5 - 15  $\pm$ 0.3  
Above 15 - 30  $\pm$ 0.4  
Above 30 - 50  $\pm$ 0.5  
Angle  $\pm$ 0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Ming Ming Zou	11/19/14			
CHECKED BY:	DATE	FINISH	MODLE	SLIDE SWITCH
Ning Ning Su	11/19/14			
APPROVED BY:	DATE	SCALE	DWG NO.	GD-KND-1-CS007D
Jia Xiang	11/19/14	1 : 1		
		SHEET NO.	PART NO.	
		1 of 1		

SIZE  
A4  
VER  
R2