


线路图
CIRCUIT DIAGRAM

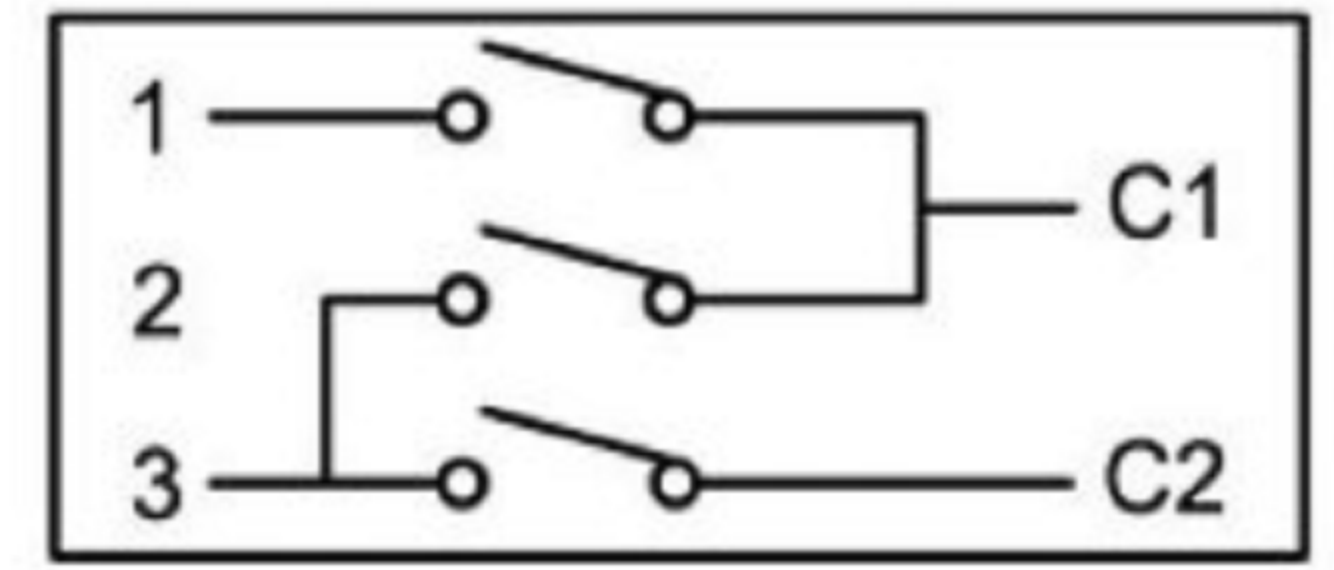


四档滑动开关

1. 滑动开关型号 SLIDE SWITCH MODEL: KND-2-3BS006D
2. 焊线端子 SOLDER CONNECTOR TYPE: 双刀四掷, 多回路 DOUBLE POLE FOUR THROW, MULTI-CIRCUIT
3. 额定值 RATING: ▲16(4)A 125/250VAC μ T105
10(2)A 125/250VAC μ T105
- ▲16(4)A 125/250VAC μ T105
10(2)A 125/250VAC μ T85
4. 接触电阻 CONTACT RESISTANCE: <50m Ω (INITIAL)
5. 绝缘电阻 INSULATION RESISTANCE: \geq 100M Ω (DC500V/1MIN)
6. 介电强度 DIELECTRIC STRENGTH: 1500V /5mA /1MIN
7. 机械寿命 MECHANICAL LIFE: >50000 CYCLES
8. 电气寿命 ELECTRICAL LIFE: >10000 CYCLES
9. 端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX260°C, 3S
10. 操作力 OPERATION FORCE: 550 \pm 150gf
11. 所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT

电流电路
CURRENT CIRCUIT

CIRCUIT:006D

| 位置 POSITION | 电路 CIRCUIT |
|----------------|--------------|
| 1 (INITIAL) 起始 | OFF |
| 2 | C1+3 |
| 3 | C1+1, C2+3 |
| 4 | C1+1+3, C2+3 |

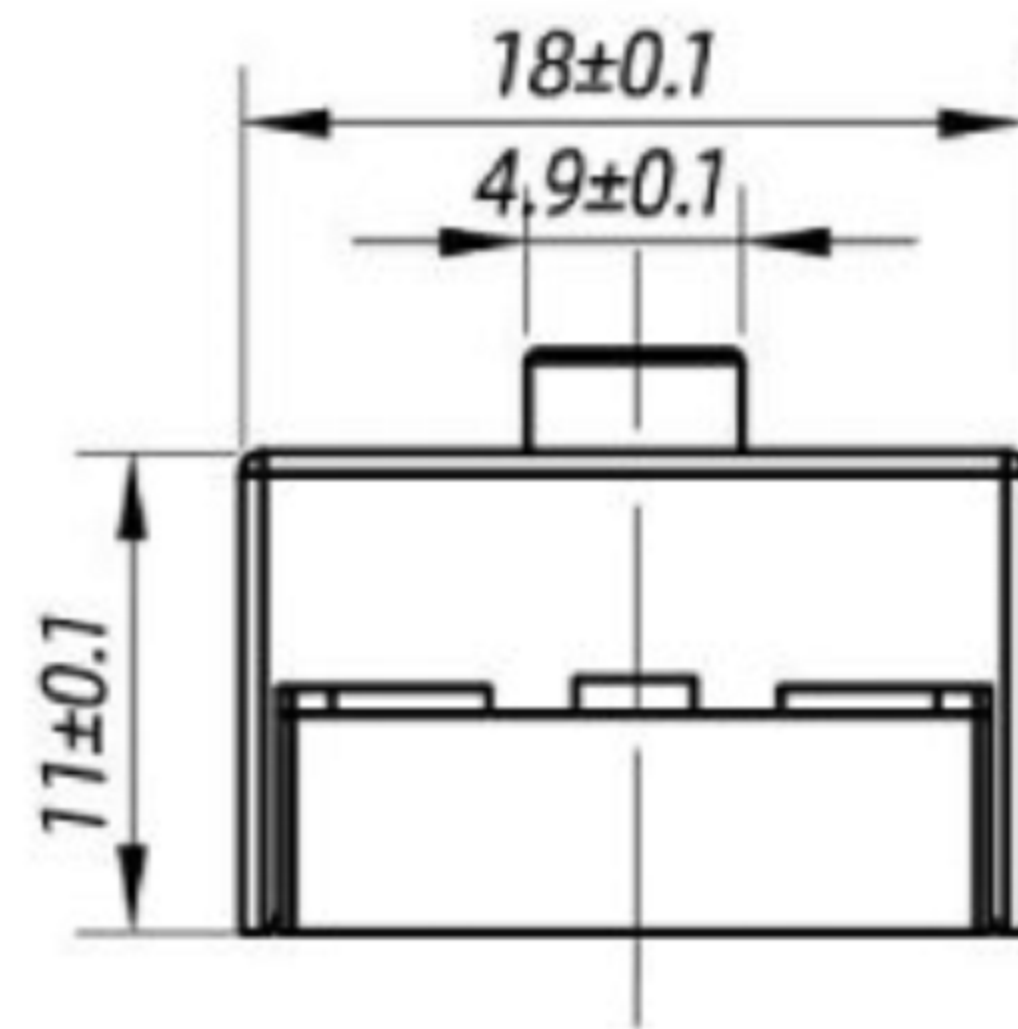

| NO. | PARTS | MATERIALS | QTY | FINISH |
|-----|--------------|----------------|-----|-----------|
| 5 | CONTACT CLIP | PBS STRIP | 1 | Ag PLATED |
| 4 | TERMINAL | BRASS | 3 | Ag PLATED |
| 3 | BASE | PHENOLIC RESIN | 1 | NATURAL |
| 2 | FRAME | STEEL STRIP | 1 | Ni PLATED |
| 1 | KNOB | POM | 1 | BLACK |

| ITEM NO. | DESCRIPTION | DRAWN | DATE |
|----------|-------------|-------|--------|
| 2 | 新增SPEC | Jack | 111914 |
| 1 | 新增尺寸 | Jack | 061614 |

东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED: Up to 5 \pm 0.2, Above 5 ~ 15 \pm 0.3, Above 15 ~ 30 \pm 0.4, Above 30 ~ 50 \pm 0.5, Angle \pm 0.3°

3RD. ANGEL'S UNITS MM

| | | | |
|--------------------------|----------------|------------|---------------------------|
| DRAWN BY: Ming Ming Zou | DATE: 11/19/14 | MAT'L | TITLE: SWITCH |
| CHECKED BY: Ning Ning Su | DATE: 11/19/14 | FINISH | MODLE: SLIDE SWITCH |
| APPROVED BY: Jia Xiang | DATE: 11/19/14 | SCALE: 1:1 | DWG NO.: GD-KND-2-3BS006D |
| SHEET NO. 1 of 1 | | PART NO. | SIZE: A4 |
| | | | VER: R2 |