


线路/ Circuit

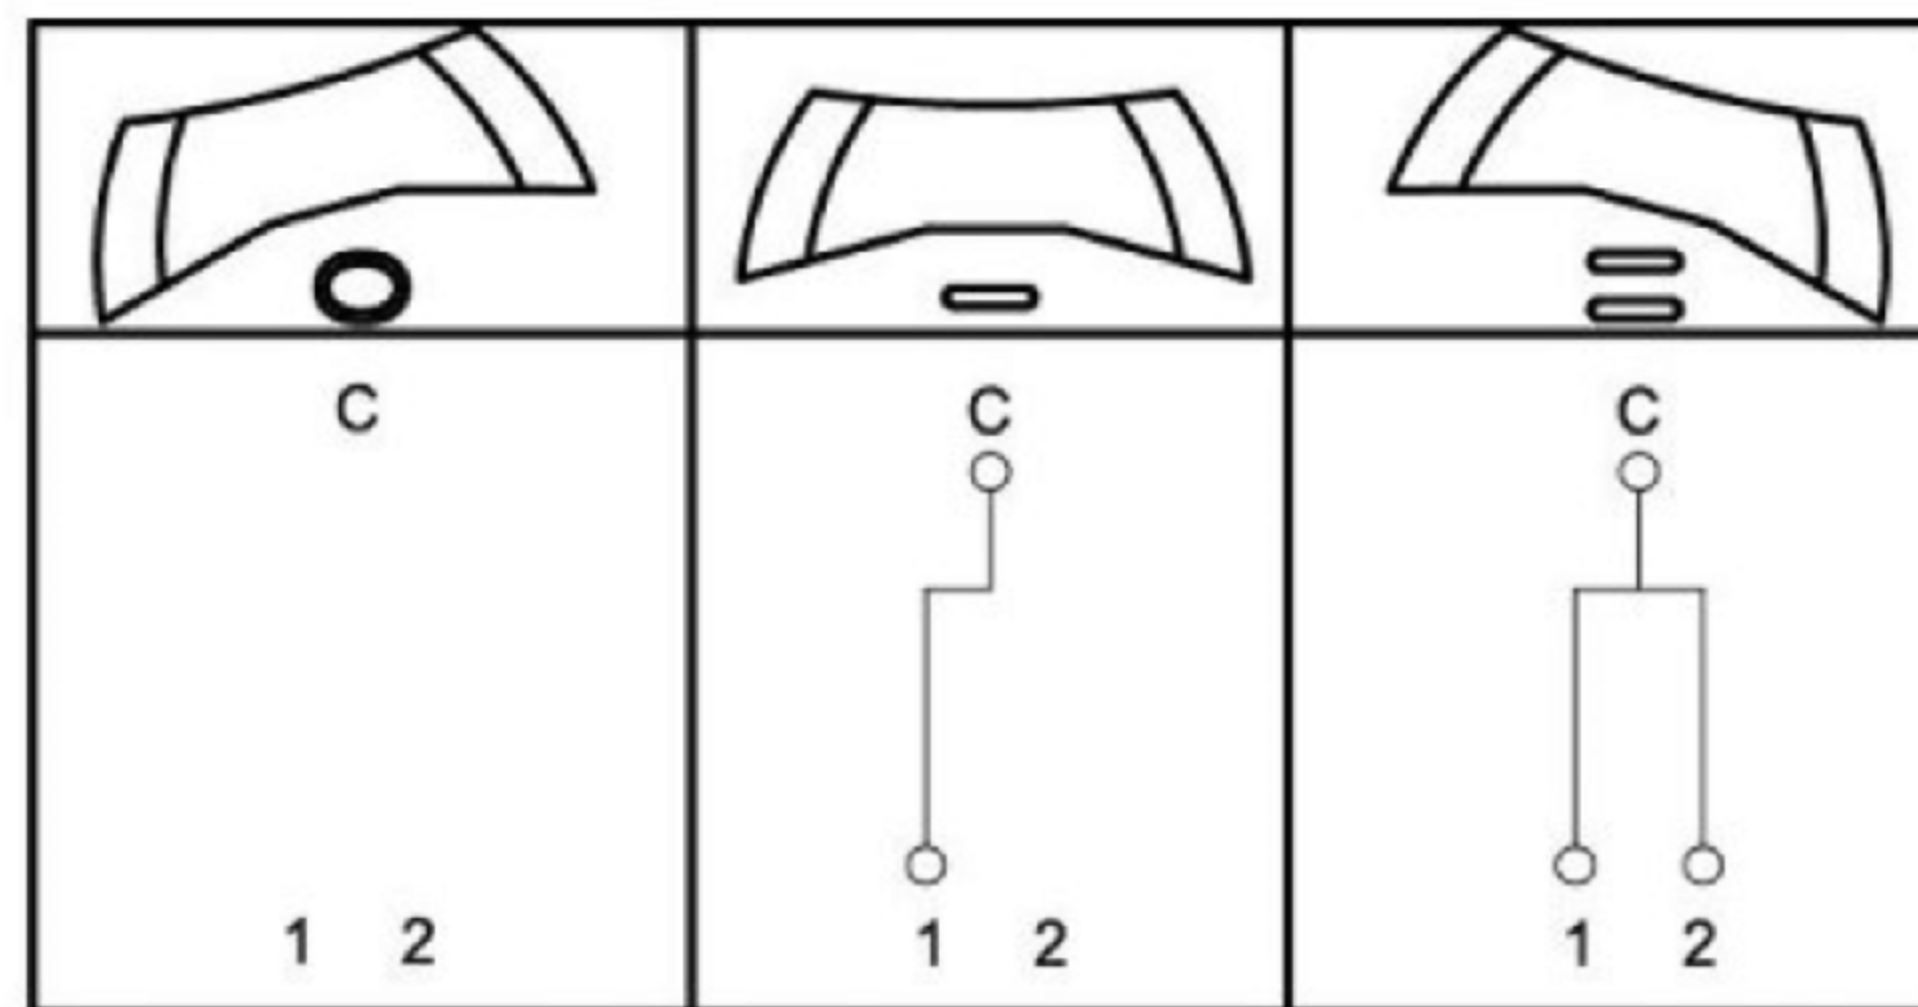

# 鹅蛋开关

1. 跷板开关型号 ROCKER SWITCH MODEL: KND-2-B2E

2. PCB端子 PCB MOUNT TERMINAL;

单刀三掷 SINGLE POLE THREE THROW

3. 额定值 RATING: 16(4) A 125/250VAC  $\mu$ T85/55

10(2)A 125/250VAC  $\mu$ T85/55

7(2)A 125/250VAC  $\mu$ T85/55



4. 接触电阻 CONTACT RESISTANCE: <math><50\text{m}\Omega</math> (INITIAL)

5. 绝缘电阻 INSULATION RESISTANCE:  $\geq 100\text{M}\Omega$  (DC500V/1MIN)

6. 介电强度 DIELECTRIC STRENGTH: 1500V /5mA /1MIN

7. 机械寿命 MECHANICAL LIFE: >50000 CYCLES

8. 电气寿命 ELECTRICAL LIFE: >10000 CYCLES

9. 端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX260°C, 3S

10. 操作力 OPERATION FORCE: 850 $\pm$ 200gf

11. 所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT



东莞市高迪电子有限公司  
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:  
Up to 5  $\pm 0.2$   
Above 5 ~ 15  $\pm 0.3$   
Above 15 ~ 30  $\pm 0.4$   
Above 30 ~ 50  $\pm 0.5$   
Angle  $\pm 0.3^\circ$

3RD. ANGEL'S

UNITS MM

DRAWN BY: DATE  
Ming Ming Zou 07/10/13

CHECKED BY: DATE  
Ning Ning Su 07/10/13

APPROVED BY: DATE  
Jia Xiang 07/10/13

MAT'L		TITLE	SWITCH
FINISH		MODLE	ROCKER SWITCH
SCALE	2:1	DWG NO.	GD-KND-2-B2E
SHEET NO.	1 of 1	PART NO.	

1	更新開關位置	Jack	071013
ITEM NO.	DESCRIPTION	DRAWN	DATE

SIZE  
A4  
VER  
R1