

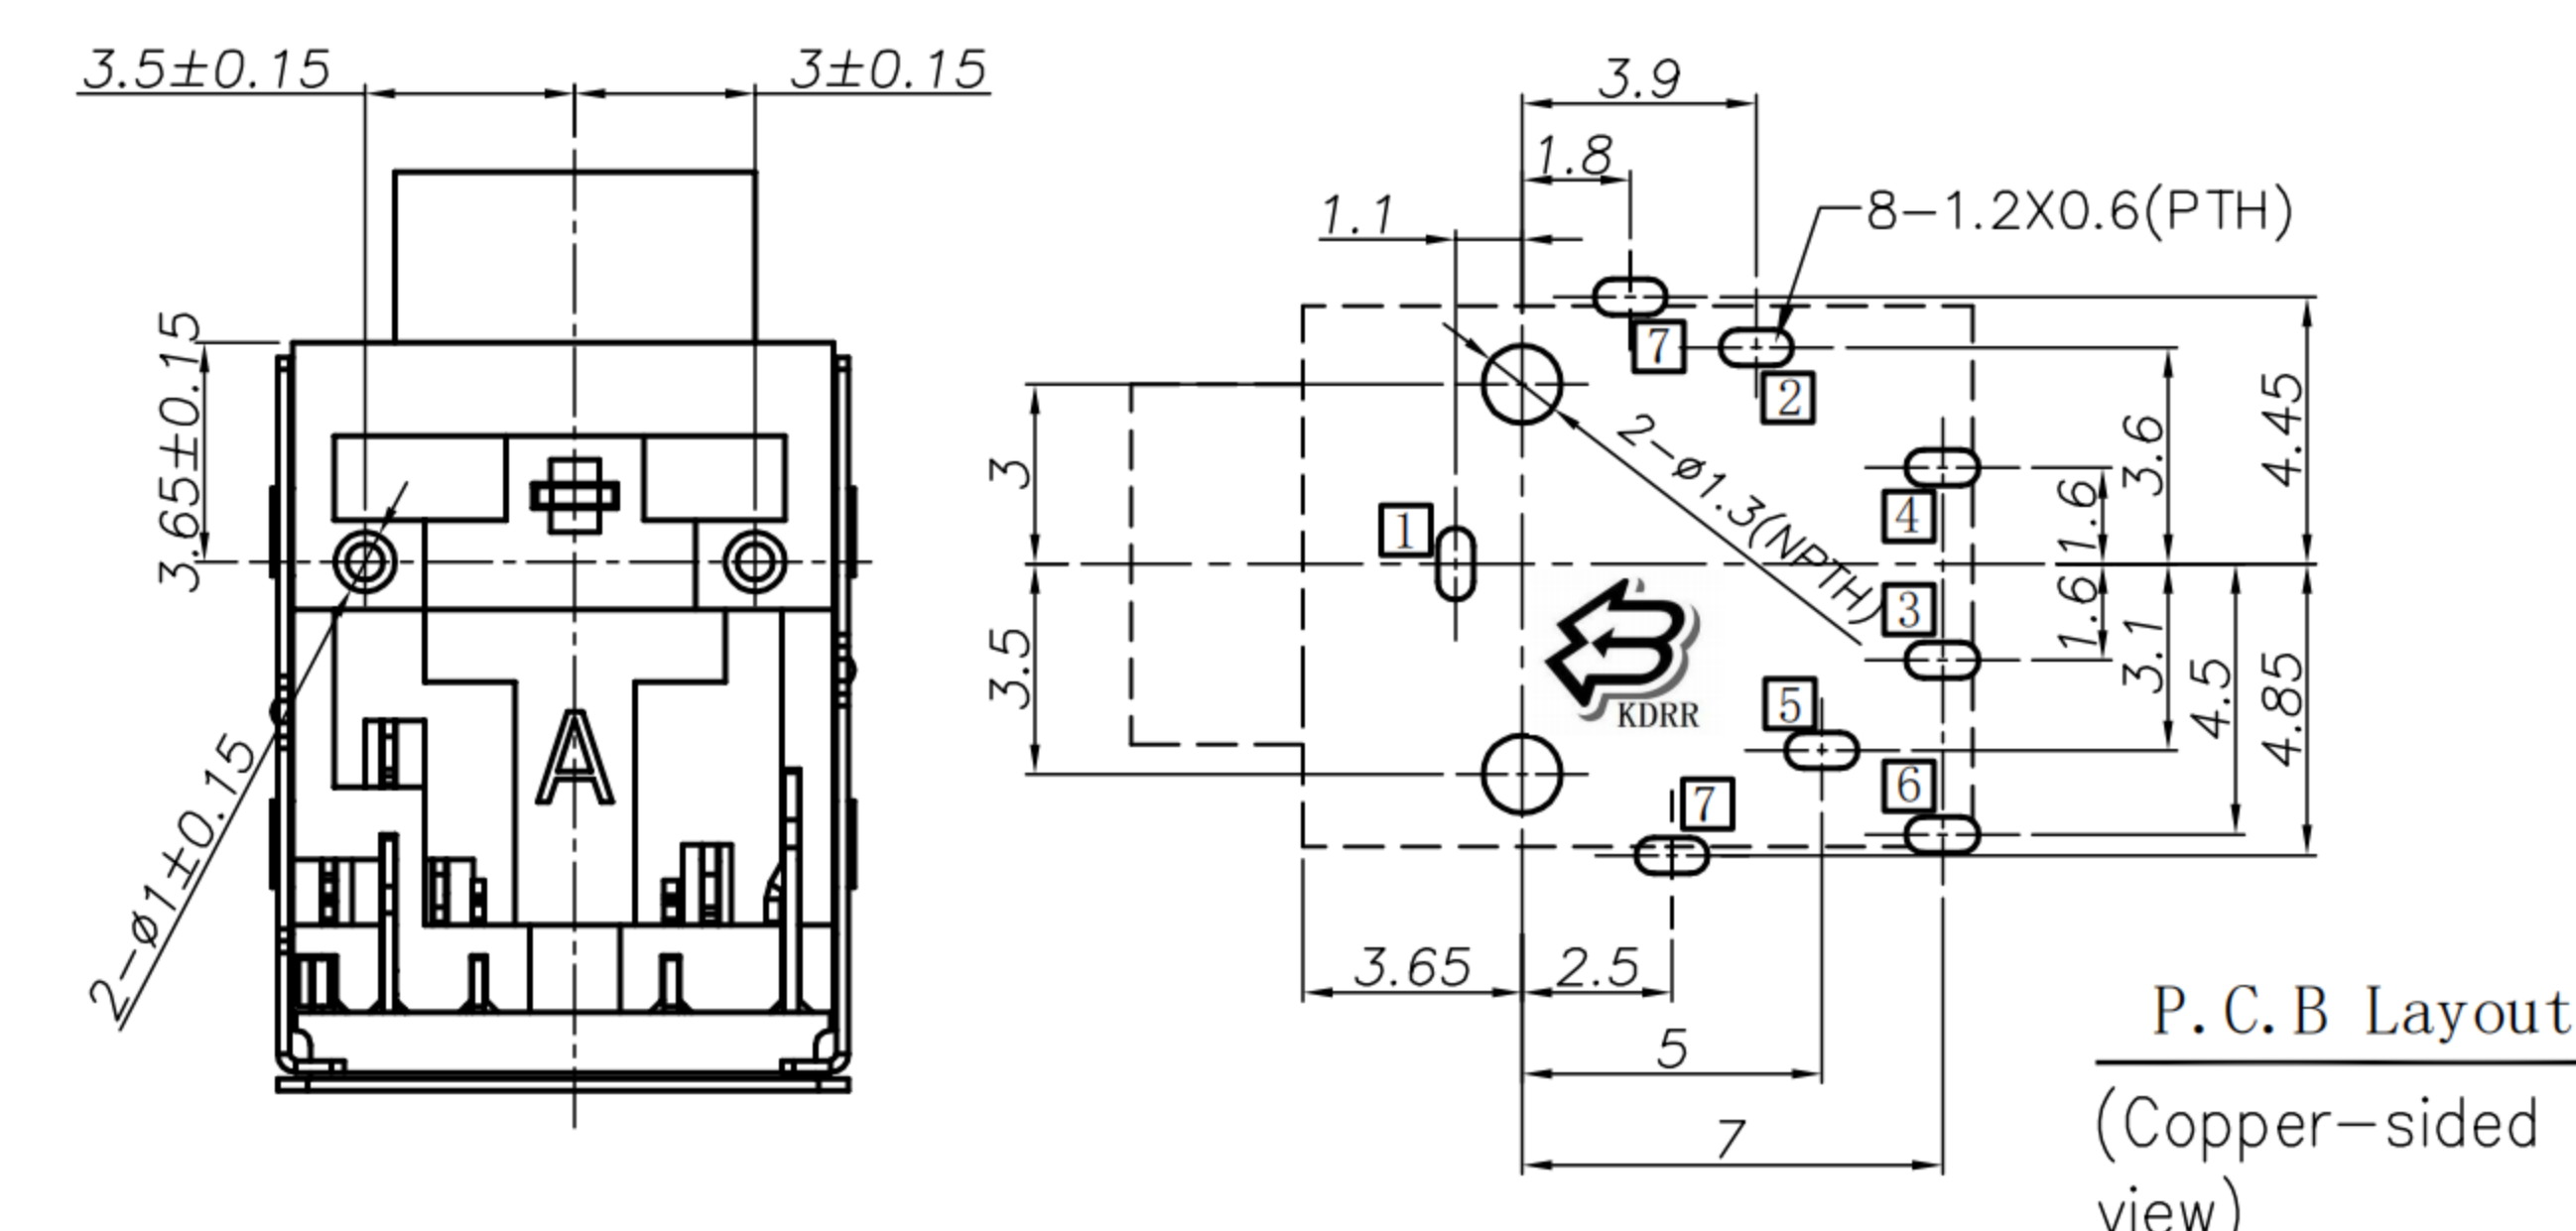


Ordering information:  
GD-PJS-3122B \_

- (1): Series No.
- (2): Schematic option: V, L
- (3): Material of housing:  
10=PA10T
- (4): Housing color:  
Zero 0A=Black 2L=Pink (701C)  
3D=Orange (1485C)  
5U=Green (577C)  
6A=Blue (284C)  
8B=Gray (5C)
- (5): Terminal plating:  
S=Silver (Ag=8u") A=Silver (Ag=20u")
- (6): Special option:  
00=No special option  
0H=Housing is Halogen Free
- (7): Packing mode:  
1=Tape reel packing  
6.life test : 5,000 cycles °

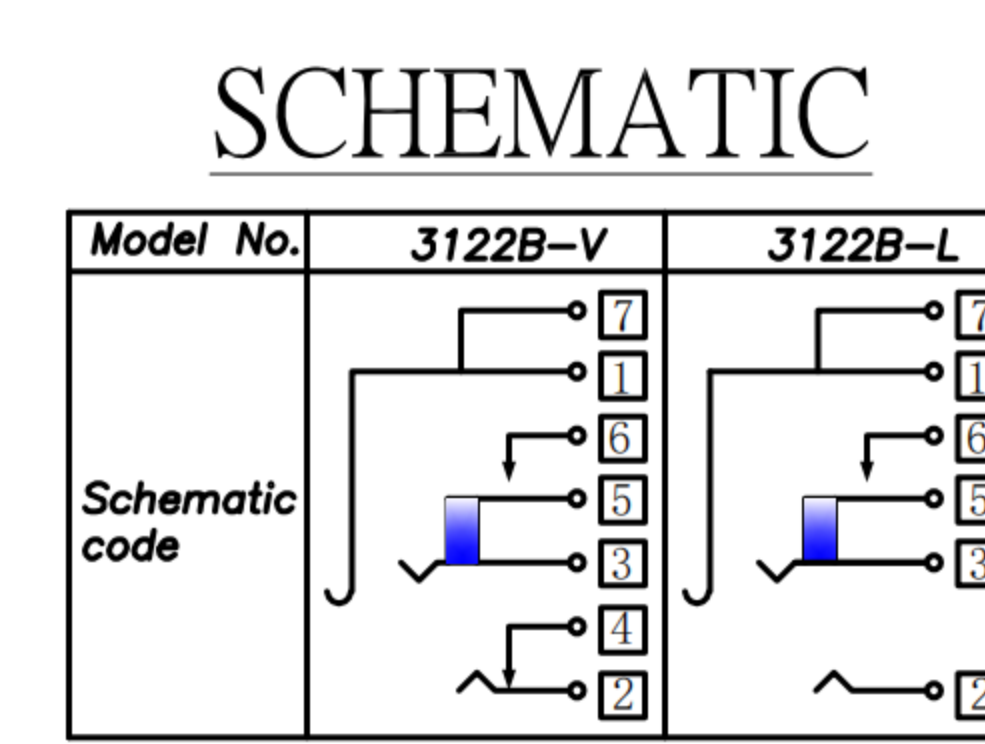

- Specification:
1. Rating : DC 30V 0.5A;
  2. Contact resistance:  $\leq 30m\Omega$ ;  
After test:  $\leq 50m\Omega$
  3. Insulation resistance:  $\geq 100M\Omega$  (500VDC);  
After test:  $\geq 50M\Omega$
  4. Withstand voltage: 500VAC ;
  5. Insertion and extraction force: 3N~30N;
  6. life test: 5000cycles min;
  7. Operation temperature range: -20°C~70°C;
  8. Preservation temperature range: -40°C~85°C;

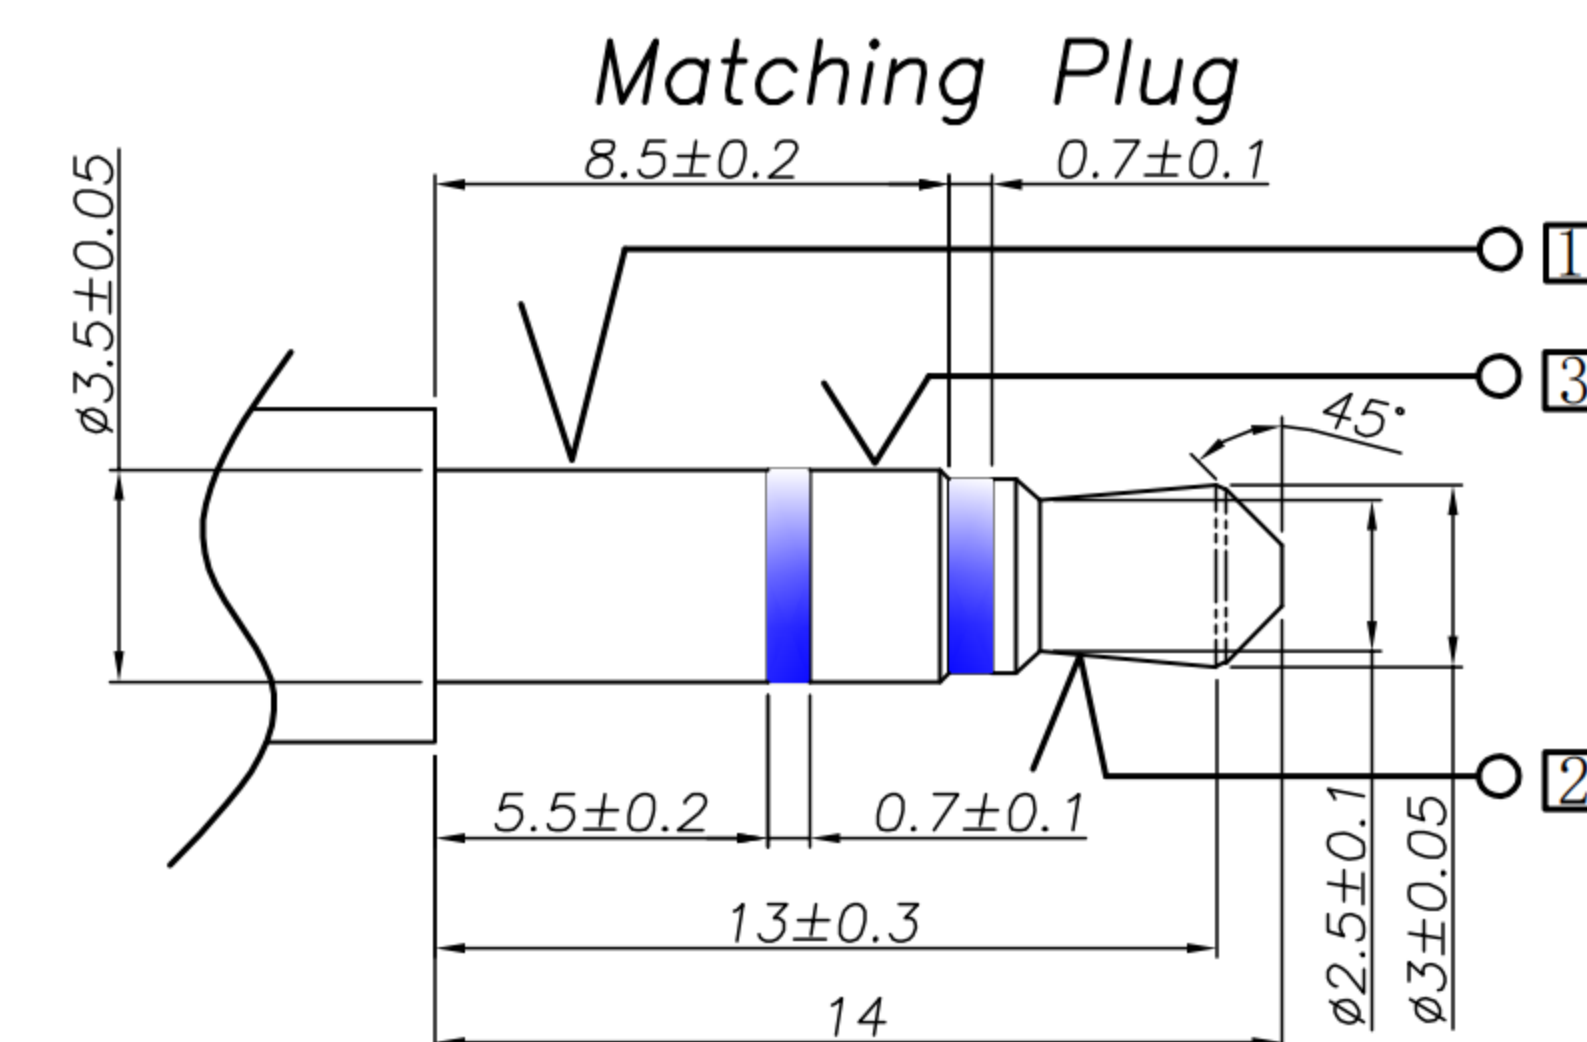

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
⑧	Shell	1	Phosphor bronze 0.2t	Nickel plating
⑦	Make terminal	1	Phosphor bronze 0.2t	Silver plating
⑥	Transfer terminal	1	Phosphor bronze 0.2t	Silver plating
⑤	Shunt terminal	1	Brass 0.25t	Silver plating
④	Ring spring	1	Phosphor bronze 0.2t	Silver plating
③	Tip spring	1	Phosphor bronze 0.25t	Silver plating
②	Earth spring	1	Phosphor bronze 0.3t	Silver plating
①	Housing	1	PA10T,UL 94V-0	

东莞市高迪电子有限公司  
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED:  
Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY: Ming Ming Zou	DATE 6/8/23	MAT'L	TITLE JACK
CHECKED BY: Ning Ning Su	DATE 6/8/23	FINISH	MODLE PHONE JACK
APPROVED BY: Jia Xiang	DATE 6/8/23	SCALE 1:1	DWG NO. GD-PJS-3122B
SHEET NO. 1 of 1		PART NO.	SIZE A4 VER R5

ITEM NO.	DESCRIPTION	DRAWN	DATE
5	新增PLUG標號	Jack	052819
4	更新圖面	Jack	052419
3	新增3d上方圖	Jack	101918
2	更新圖面	Jack	092818
1	新增尺寸	Jack	070717