

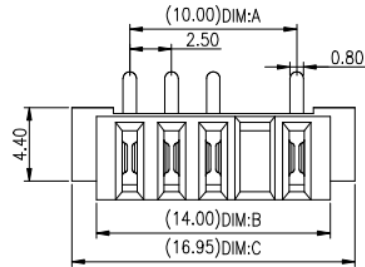




REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29



No:of pins	Dimension				
	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
03	7.50	11.50	14.45	7.50	2.20
04	10.00	14.00	16.95	10.00	2.20
05	12.50	16.50	19.45	12.50	2.20
06	15.00	19.00	21.95	15.00	2.20
07	17.50	21.50	24.45	17.50	2.20
08	20.00	24.00	26.95	20.00	2.20
09	22.50	26.50	29.45	22.50	2.20
10	25.00	29.00	31.95	25.00	2.20



Recommended P.C.B Layout
Layout Tolerance=+/-0.05mm

NOTE:
Material
Insulator:Nylon 9T(UL94V-0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Current rating:3A 5A
instant CURRENT:7A
Contact Resistance:30M Ω
Insulation Resistance:100M Ω
Dielectric Voltage:500V
Operdting Temperature:-40~105°

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X	± 0.50	X	$\pm 2'$
X.X	± 0.30	X.X	$\pm 1'$
X.XX	± 0.20	X.XX	
X.XXX	± 0.10	X.XXX	

东莞市高迪电子有限公司

DWG NO.	PART NAME:
DESIGN:	PART NO.
CHECK:	REV. UNIT: SHEET:
APPROVED	A mm 1/1

ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION	REMARK
②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	