
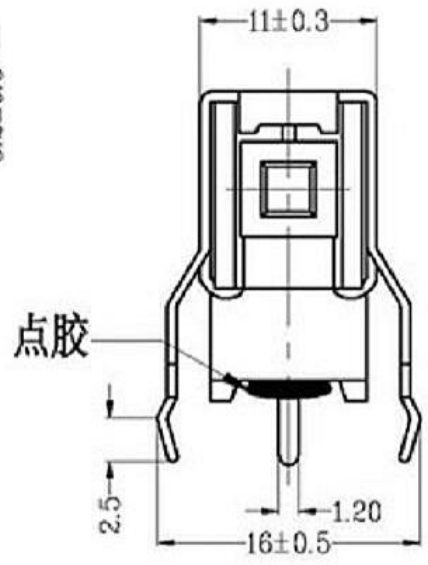



9. SUGGESTED PANEL HOLE SIZE:

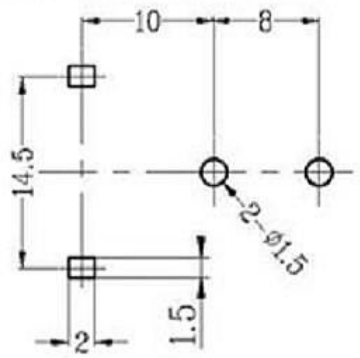

- 1. FUNCTION: OFF-ON
- 2. RATING: UL: TV-5
ENEC VDE/CQC: 8A/128A μ 250V~T85
- 3. OPERATION FORCE: 700±300gf
- 4. CONTACT RESISTANCE: ≤ 50 mΩ
- 5. INSULATION RESISTANCE: ≥ 100 MΩ
- 6. DIELECTRIC WITHSTAND: TERMINAL TO BUTTON 3000VAC/5mA/1MIN/TUE
TERMINAL TO TERMINAL 1500VAC/5mA/1MIN/TUE

7. TRAVEL	FULL TRAVEL	4.0±0.5mm
	LOCK TRAVEL	2.5±0.5mm

8. CIRCUIT DIAGRAM:



注: "*"□表示关键尺寸(3个).

NO.	PARTS	MATERIALS	Q'TY		TOLERANCE UNLESS SPECIFIED						
8					WITHIN 1.5mm : ±0.1mm	A	2012-8-13	初版			
7					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.		
5	SPRING	SUS	1	NATURAL	TITLE : PUSH SWITCH MODEL:				UNIT : mm	DRWG NO.:	
4	CAM STICK	SUS	1	NATURAL					SCALE: 5:1	DWN.	2012-8-13
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED					CHK'D		2012-8-13
2	COVER	PA66	1	BLACK	东莞市高迪电子有限公司				APPD.		
1	KNOB	PA66/PBS C5210R-EH	1	WHITE/Ag CLAD							2012-8-13