
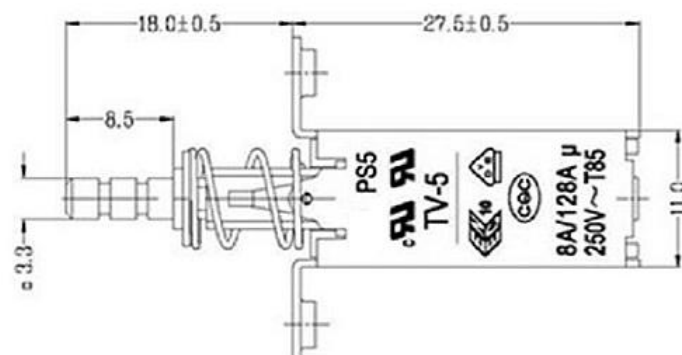
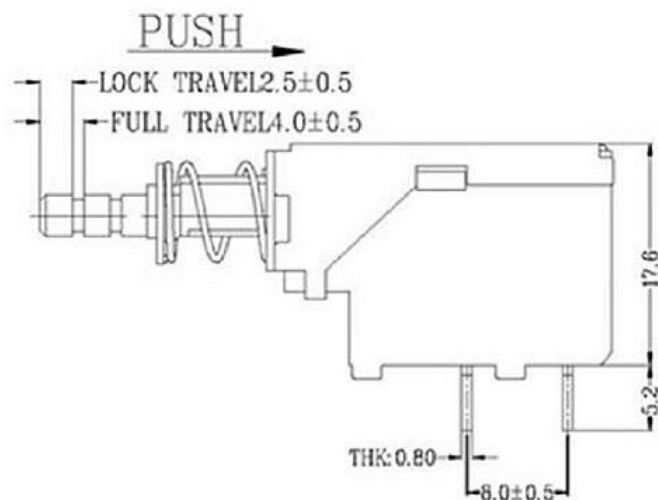
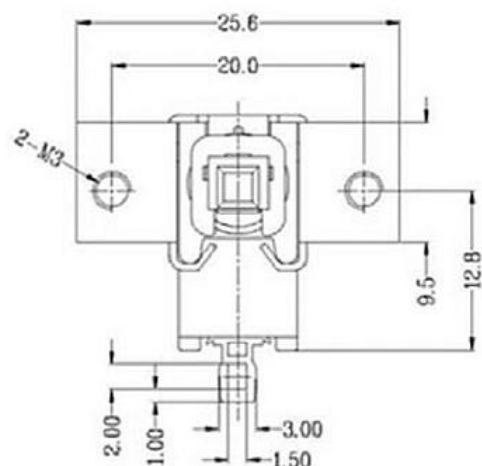




1、FUNCTION: OFF-ON

2、RATING: UL: TV-5

ENEC VDE/CQC: 8A/128A μ 250V~T85

3、OPERATION FORCE: 700±300g.f

4、CONTACT RESISTANCE: $\leq 50 \text{ m}\Omega$


5、INSULATION RESISTANCE: $\geq 100 \text{ M}\Omega$

6、DIELECTRIC WITHSTAND: TERMINAL TO BUTTON 3000VAC/5mA/1MIN
TERMINAL TO TERMINAL 1500VAC/5mA/1MIN

7、TRAVEL:

FULL TRAVEL	4.0±0.5mm
LOCK TRAVEL	2.5±0.5mm

8、CIRCUIT DIAGRAM:



注: "□"表示关键尺寸(3个).

NO.	PARTS	MATERIALS	Q'TY	TOLERANCE UNLESS SPECIFIED				
8								
7								
6				WITHIN 1.5mm : $\pm 0.1\text{mm}$ OVER 1.5mm : $\pm 0.2\text{mm}$	A ISSUE	2012-8-13 DATE	初版 DESCRIPTIONS OF REVISION	APPD.
5	SPRING	SUS	1	NATURAL	TITLE : PUSH SWITCH			
4	CAM STICK	SUS	1	NATURAL	UNIT : mm			
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED	MODEL:			
2	COVER	PA66	1	BLACK	SCALE: 5:1			
1	KNOB	PA66/PBS C5210R-EH	1	WHITE/Ag CLAD	DWN.			
					CHK'D			
					APPD.			
					2012-8-13			
					2012-8-13			



东莞市高迪电子有限公司