

SECTION: A-A

**SPEC:**

A. Material:

1. Housing: PA66

2. Terminal: COPPER ALLOY, TIN PLATED

B. Electrical Characteristics:

1. Rating: 15A 250V~ (UL, CUL)



10A 250V~ (CCC, VDE, SEMKO, NEMKO, FIMKO, DEMKO, KC)

2. Electric Strength: AC 2,000 V FOR ONE MINUTE


3. Insulation Resistance: 100MΩ MIN. AT 500V DC

C. Approvals:

UL, CUL, CCC, VDE, SEMKO, NEMKO, FIMKO, DEMKO, KC

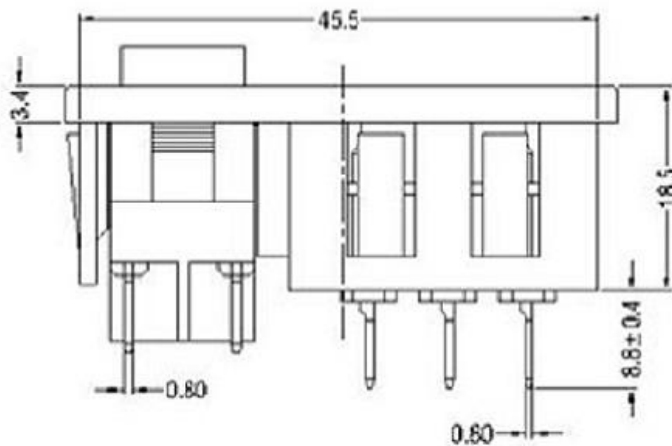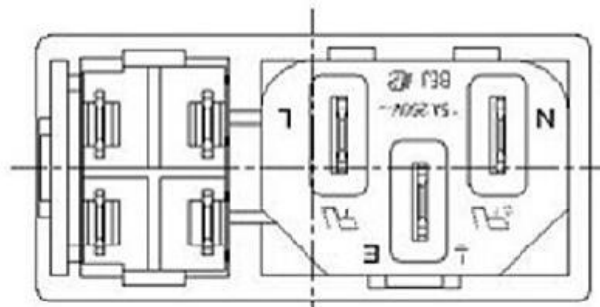

Part No.:	DIM. X
ST-A01-003JD-008+6	0.8
ST-A01-003JD-010+6	1.0
ST-A01-003JD-015+6	1.5
ST-A01-003JD-020+6	2.0
ST-A01-003JD-025+6	2.5

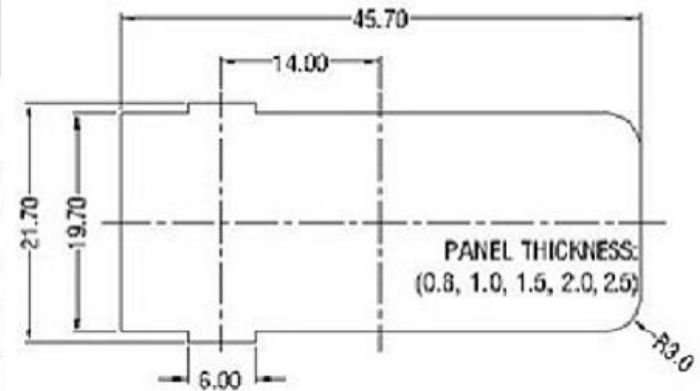

PANEL CUT-OUT

普通公差

COMMON TOLERANCE:

UP TO 5	±0.20
ABOVE 5 TO 30	±0.30
ABOVE 30	±0.50
ANGULAR	±5°




东莞市高迪电子有限公司

单位  
UNIT  
mm  
绘图  
DRAWN BY  
日期  
DATE

林晓良  
19.08.12

投影  
PROJECTED  
核对  
CHECKED BY  
核准  
APPROVAL BY



品名  
PRODUCT NAME  
型号  
MODEL NO.  
料号  
PART NO.

AC POWER JACK  
KD-AC电源插座

REV. DATE REVISION DESCRIPTION

ISSUE