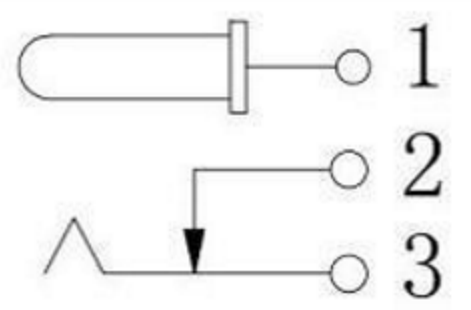



DC JACK SCHEMATIC			
CENTER PIN	<table border="1"> <tr><td>Ø2.0mm</td></tr> <tr><td>Ø2.5mm</td></tr> </table>	Ø2.0mm	Ø2.5mm
Ø2.0mm			
Ø2.5mm			

額定電源:6A ,30VDC
 插針規格:2.0/2.5mm
 插拔力:3-30N
 插拔次數:5,000次
 焊接型式:DIP


東莞市高迪電子有限公司
 DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
------------------------------------	--	--------------	---	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH+JACK
Ming Ming Zou	10/31/13			
CHECKED BY:	DATE	FINISH	MODLE	AC POWER SOCKET
Ning Ning Su	10/31/13			
APPROVED BY:	DATE	SCALE	DWG NO.	GD-RS-601-01
Jia Xiang	10/31/13	1:1		
SHEET NO.	1 of 1	PART NO.		
				SIZE A4
				VER R