



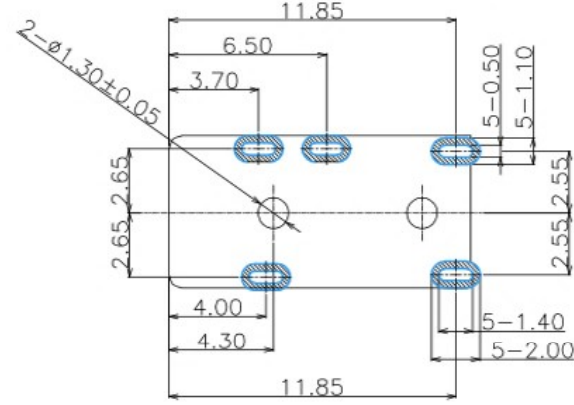


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Lucky	2018.03.22



- NOTES:
- CONTACT CURRENT RATING: 1A.
 - CONTACT RESISTANCE: 50 mΩ MAX.;
 - INSULATION RESISTANCE: 1000Ω MIN.;
 - DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
 - CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;
 - PRODUCT MEET THE REQUEST OF THE RoHs, SEE TABLE A:

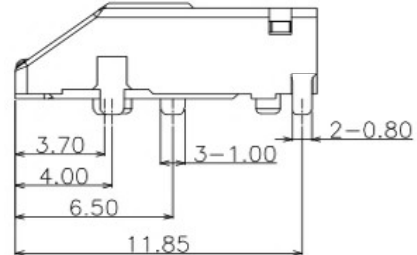


3D VIEW



RECOMMEND FPC LAYOUT
TOLERANCE :±0.05

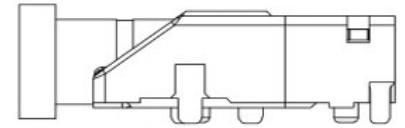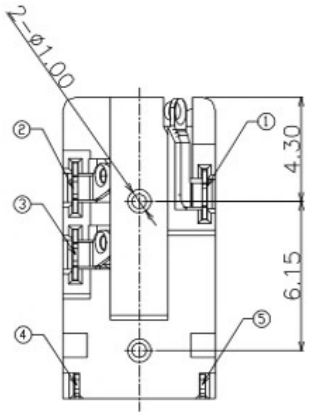

PLUG MATE DRAWING

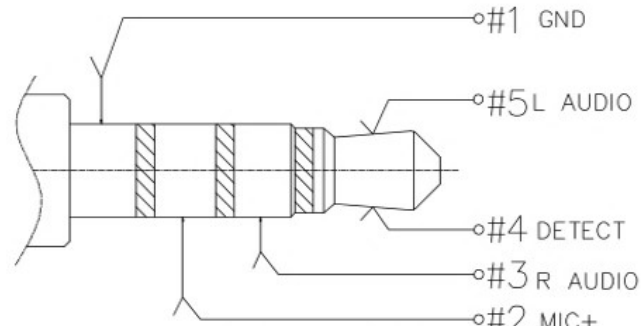

MALE PLUG SCHEMATIC

⑤	HOUSING	1	PART COLOR BLACK	
④	CONTACT 4#	1	STAINLESS STEEL; NICKEL(40u*MIN.) UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.2
③	CONTACT 3#	1	STAINLESS STEEL; NICKEL(40u*MIN.) UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.2
②	CONTACT 2#	1	PHORPHOS BRONZE; NICKEL(40u*MIN.) UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.2
①	CONTACT 1#	1	PHORPHOS BRONZE; NICKEL(40u*MIN.) UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.2
ITEM	PART NAME	Q'TY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2'
X.X	±0.30	X.X	±1'
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—

东莞市高迪电子有限公司

DWG NO.	PART NAME:	Lucky	2018.03.22	PHONE JACK	
DESIGN:	PART NO.				
CHECK:				REV. A	UNIT: mm
APPROVED	Lucky	2018.03.22	SHEET: 1/1		