






PROPRIETARY INFORMATION  
COMPANY CONFIDENTIAL

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Lucky	11/01/17



- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX.;
- INSULATION RESISTANCE: 1000Ω MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 30N MAX.;
- CONNECTOR UNMATING FORCES: 3N MIN.;





3D VIEW

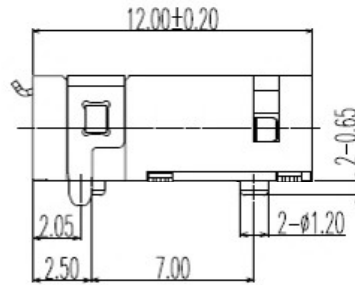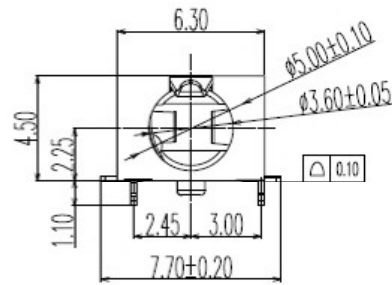

MYLAR 6.00X3.80X0.06

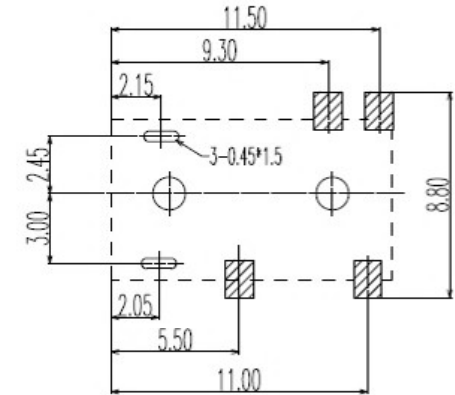

P.C.B LAYOUT  
TOP VIEW

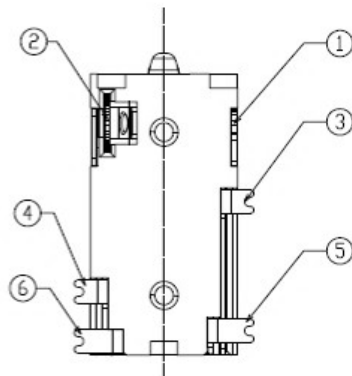

SCHEMATIC

- G: No HEAD, HAVE MYLAR
- H: No HEAD, No MYLAR
- TAPE REEL
- COLOR BLACK
- GOLD PLATING
- 6 PIN
- FEMALE

ITEM	NAME	QTY	DESCRIPTION	NOTE
7	TERMINAL 6#	1		
6	TERMINAL 5#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	
5	TERMINAL 4#	1		
4	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	
3	TERMINAL 2#	1		
2	TERMINAL 1#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	
1	HOUSING	1	PPA COLOR BLACK	

MEASURE POINT:  
QUADRANT POINT (QP)  
TANGENCY POINT (TP)  
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:  
X. ±0.25  
X.x ±0.20  
X.xx ±0.15  
X.xxx ±0.10  
ANGULAR ±3°

东莞市高迪电子有限公司

DESIGN: Lucky	DATE 2017/11/01
CHECKED	DATE
APPROVED	DATE
PART NO.	
DRAWING NO.	

TITLE: ∅3.5mm PHONE JACK H=4.5 mm NO HEAD SMT TYPE CONNECTOR		
REV.: A	SCALE: 1:1	UNIT: mm
SIZE: A4	SHEET: 1/1	