




印制板开孔尺寸(±0.1mm)

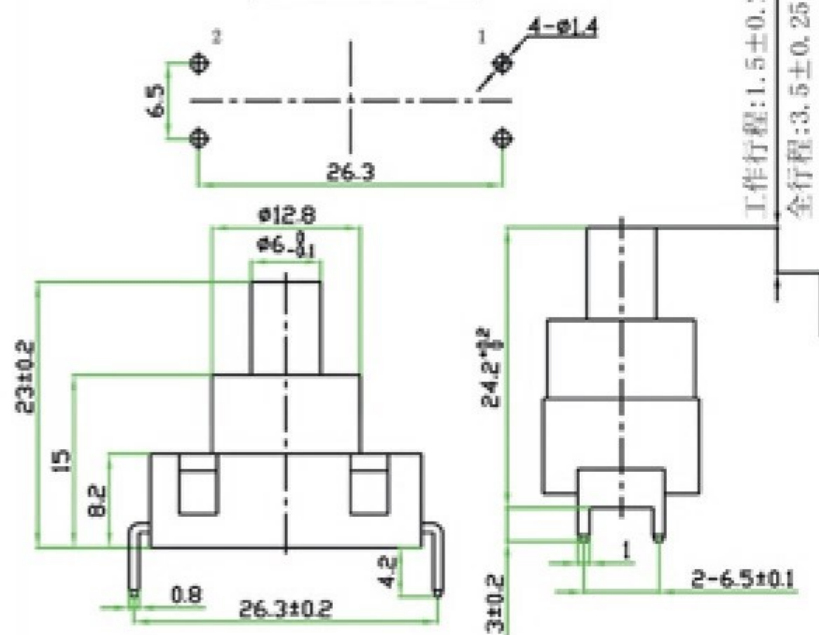

配线图



电源参数: 12(10)A 250V AC; 7(7)A 250V AC; 8A 250V AC;
16A 125V AC; 18A 125V AC

接触电阻: ≤50mΩ

绝缘电阻: ≥100MΩ

介电强度: 极与极1500VAC, 极与壳3000VAC

环境温度: T105

电气寿命: 1E4

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-8-13	初版	
5	SPRING	SUS	1	NATURAL	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CAM STICK	SUS	1	NATURAL	TITLE : VERTICAL PUSH SWITCH		UNIT : mm	DRWG NO.:	
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED	MODEL:		SCALE: 5:1	DWN.	2012-8-13
2	COVER	PA66	1	BLACK	东莞市高迪电子有限公司			CHK'D	
1	KNOB	PA66/PBS C5210R-EH	1	WHITE/Ag CLAD				APPD.	
NO.	PARTS	MATERIALS	Q'TY						