




CAD FILE:

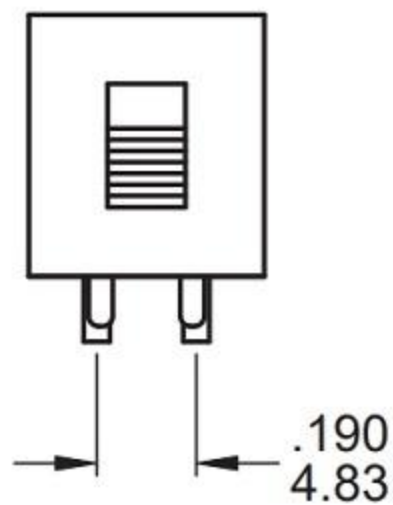

PCB MOUNTING

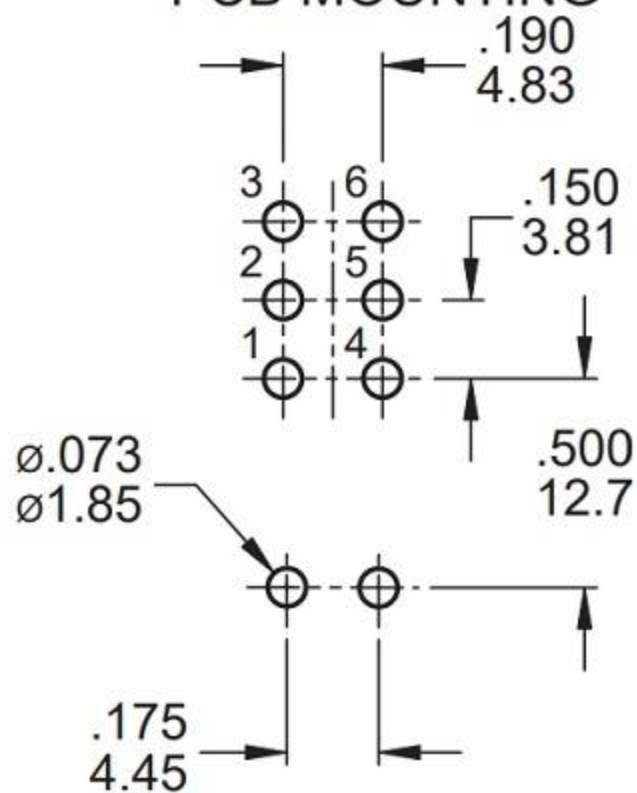

注: "*"表示关键尺寸(4个)

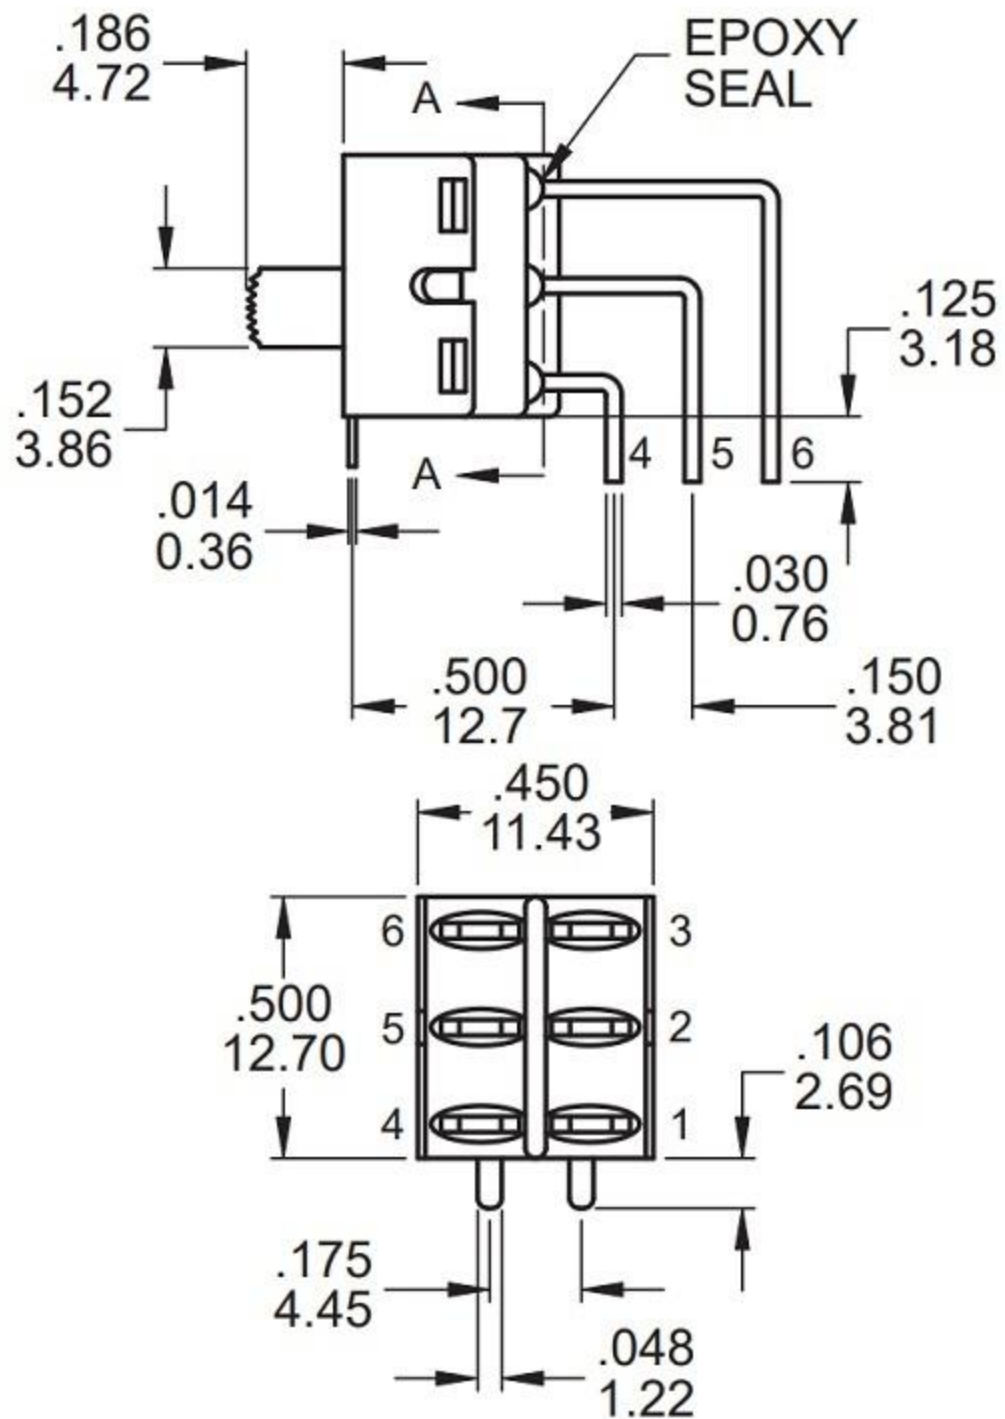

Section drawing for A-A.

拨动开关立式技术参数:

1. 额定负荷: AC 125V 2A 3A
2. 接触阻抗: $\leq 50m\Omega$
3. 绝缘阻抗: $\geq 100m\Omega$ DC500V
4. 耐焊温度: $250 \pm 5^\circ$ 5s
5. 使用寿命: 10,000 cycles
6. 使用温度: -25°C to 80°C
7. 使用湿度: $\leq 85\%$ RH
8. 操作力: 160gf 256gf 300gf 可定制
9. 手柄长度: 2mm-10mm 可定制

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED		TITLE : VERTICAL SLIDE SWITCH		UNIT : mm	DRWG NO.:		
8					UNLESS SPECIFIED		MODEL:		SCALE: 3:1	DWN. 2012-10-26		
7	STEEL BALL	STEEL	1	NATURAL	WITHIN		DATE		初版			
6	SPRING	STEEL WIRE	1	NATURAL	OVER		ISSUE		DESCRIPTIONS OF REVISION			
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED					APPD.			
4	TERMINAL	BRASS STRIP	8	Ag PLATED								
3	BASE	PHENOLIC RESIN	1	NATURAL								
2	FRAME	STEEL STRIP	1	Ni PLATED								
1	KNOB	POM	1	BLACK								
					东莞市高迪电子有限公司					CHK'D		2012-10-26
										APPD.		2012-10-26