


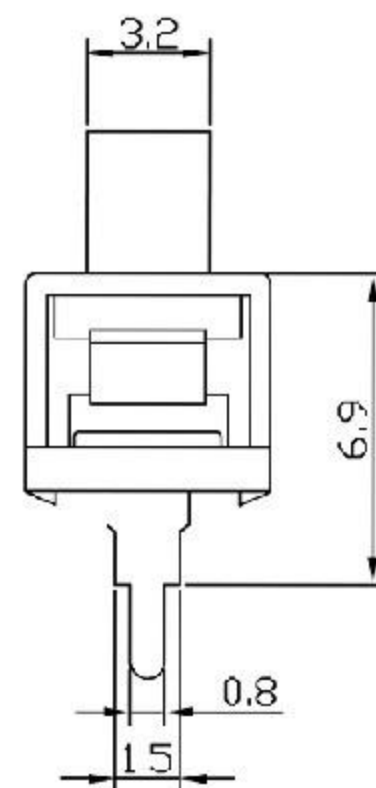


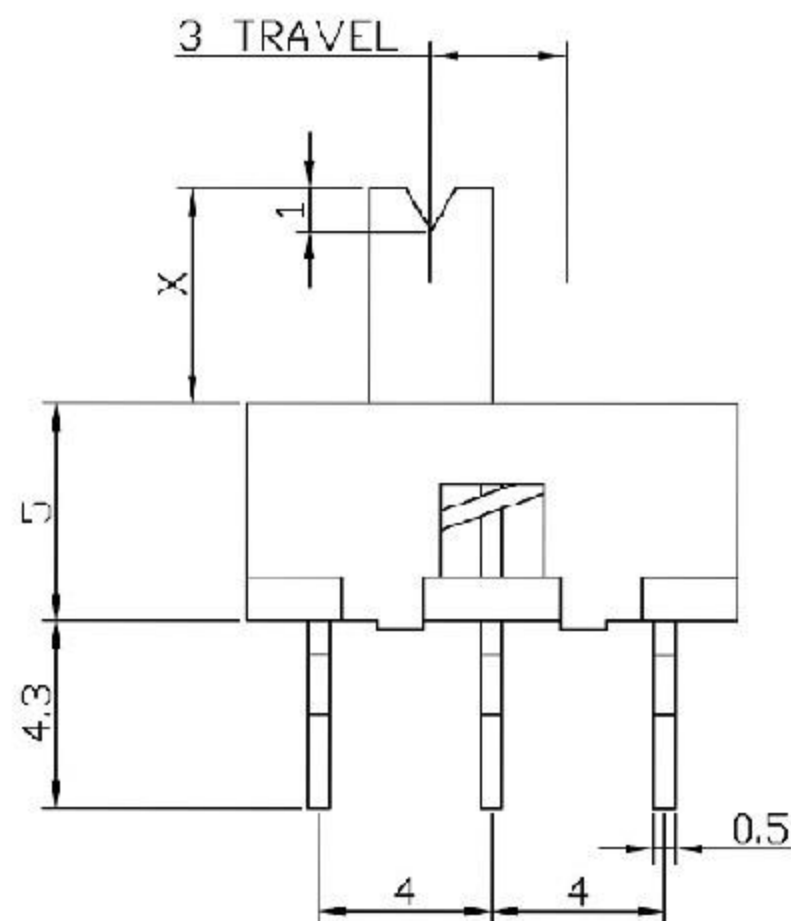

CAD FILE:

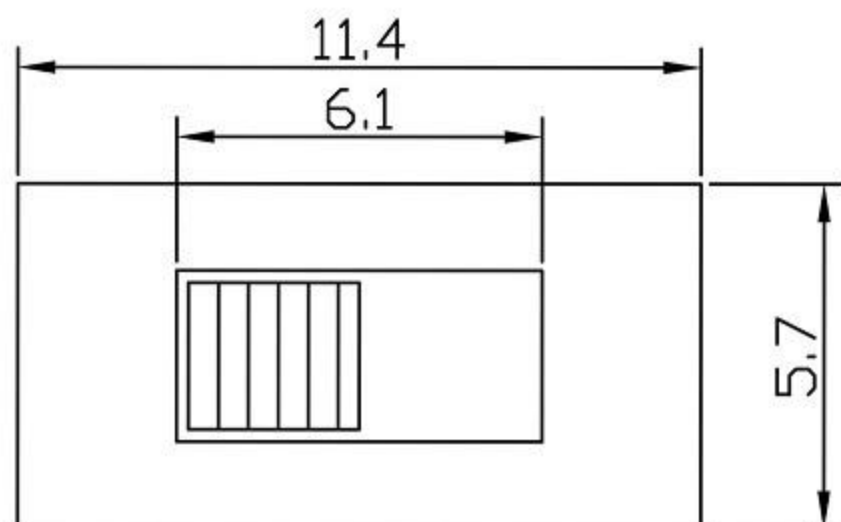

注: "*"表示关键尺寸(6个)

拨动开关立式技术参数:

1. 额定负荷: DC 30V 50V 0.3A 0.5A
2. 接触阻抗: $\leq 50\text{m}\Omega$
3. 绝缘阻抗: $\geq 100\text{m}\Omega$ DC500V
4. 耐焊温度: $250 \pm 5^\circ$ 5s
5. 使用寿命: 10,000 cycles
6. 使用温度: -25°C to 80°C
7. 使用湿度: $\leq 85\% \text{RH}$
8. 操作力: 160gf 256gf 300gf 可定制
9. 手柄长度: 2mm-10mm 可定制

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED		A		2012-10-28		初版		APPD.	
					WITHIN	ISSUE	DATE	DESCRIPTIONS OF REVISION						
					OVER									
					TITLE : VERTICAL SLIDE SWITCH			UNIT : mm	DRWG NO.:					
					MODEL:			SCALE: 3:1	DWN.			2012-10-28		
					 东莞市高迪电子有限公司			CHK'D			2012-10-28			
								APPD.						
8					TOLERANCE UNLESS SPECIFIED		A		2012-10-28		初版			
7	STEEL BALL	STEEL	1	NATURAL	WITHIN		ISSUE	DATE	DESCRIPTIONS OF REVISION					APPD.
6	SPRING	STEEL WIRE	1	NATURAL	OVER									
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH			UNIT : mm	DRWG NO.:					
4	TERMINAL	BRASS STRIP	8	Ag PLATED	MODEL:			SCALE: 3:1	DWN.			2012-10-28		
3	BASE	PHENOLIC RESIN	1	NATURAL	 东莞市高迪电子有限公司			CHK'D			2012-10-28			
2	FRAME	STEEL STRIP	1	Ni PLATED				APPD.						
1	KNOB	POM	1	BLACK										