


F:力度(gf)
F=160/320
L:高度(mm)
L=5.0/7.0/9.0


SPECIFICATIONS

Rating	0.1A 12V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Life	50,000 cycles

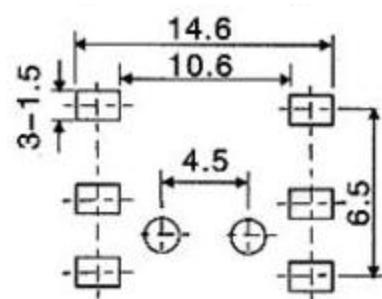

P.C.B. Pattern

Circuit Diagram



NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CONTACT	2	SUS	Ag plated
C	COVER	1	SUS	Ag plated
B	CASE	1	LCP	Black
A	Knob	1	PA46	Black



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	07/30/13		MODLE	Multi Function SWITCH
CHECKED BY:	DATE	FINISH	DWG NO.	SIZE
Jacky Chen	07/30/13			A4
APPROVED BY:	DATE	SCALE	PART NO.	VER
Tony Kao	07/30/13	1:1		R1
		SHEET NO.		
		1 of 1		

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S

UNITS MM

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新材質	Jack	073013