


SCHMATIC (NON-SHORTING)


X(mm)
2mm
3mm
4mm
5mm
6mm
7mm
8mm
9mm

SPECIFICATIONS

Rating	DC 50V 0.5A
Circuit	
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	250gf ±100gf
Operating Life (cycles)	10,000

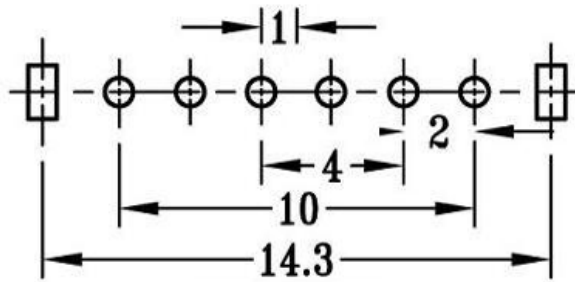

P.C.B LAYOUT  
BOTTOM VIEW

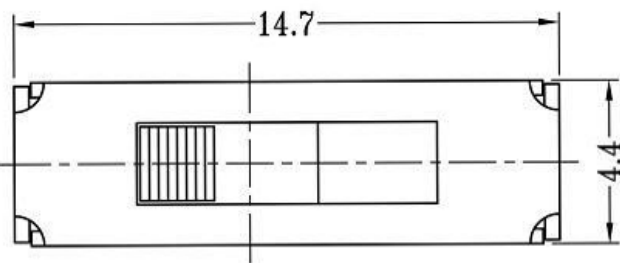

7	STEEL BALL	1	STAINLESS	Natural
6	SPRING	1	STAINLESS	Natural
5	CONTACT CLIP	1	PHOSPHOR BRONZE	Ag-plated
4	TERMINAL	4	BRASS	Ag-plated
3	BASE	1	PHENOLIC RESIN	Natural
2	FRAME	1	SPCC	Ni-Plated
1	KNOB	1	POM	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



东莞市高迪电子有限公司  
DongGuan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY:

DATE

Jack Lu

11/20/14

CHECKED BY:

DATE

Jacky Chen

11/20/14

APPROVED BY:

DATE

Tony Kao

11/20/14

MAT'L

TITLE

SWITCH

FINISH

MODLE

SLIDE SWITCH

SCALE

1:1

DWG NO.

SHEET NO.

1 of 1

PART NO.

SIZE

A4

VER

R3

3	新增SPEC	Jack	112014
2	更新材質	Jack	040214
1	更新尺寸6.03X5.8	Jack	081714
ITEM NO.	DESCRIPTION	DRAWN	DATE