



OPERATING MODE : SELF-LOCK :
NON-LOCK :

SPECIFICATIONS

Rating	12V DC / 0.2A
Circuit	1P-2T
Contact Resistance	200 mΩ MAX .
Timing	NON-SHORTING
Stroke	Full:1.9mm , Lock:1.1mm
Operating Force	200 ± 50gf
Operating Life	10,000 CYCLES

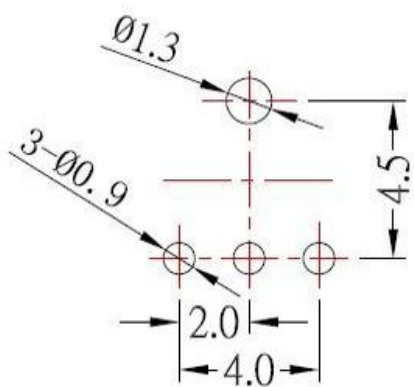

**P.C.B LAYOUT
BOTTOM VIEW**



SCHEMATIC (NON-SHORTING)

7	CONTACT	PHOSPHOR BRONZE	1	Ag PLATED
6	TERMINAL	BRASS	3	Ag PLATED
5	SPRING	SUS	1	NATURAL
4	CAM STICK	SUS	1	NATURAL
3	CASE	PA66	1	GREY
2	COVER	POM	1	BLACK
1	KNOB	POM	1	WHITE
NO.	PARTS	MATERIALS	Q'TY	FINISH

3	更新SPEC	Jack	111815
2	新增pcb layout孔位尺寸	Jack	072215
1	更新Contact Resistance	Jack	010615
ITEM NO.	DESCRIPTION	DRAWN	DATE


东莞市高迪电子有限公司
 Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S

 UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	11/18/15	FINISH	MODLE	PUSH SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	
Jacky Chen	11/18/15	1 : 1		
APPROVED BY:	DATE	SHEET NO.	PART NO.	
Tony Kao	11/18/15	1 of 1		
				SIZE A4
				VER R3