
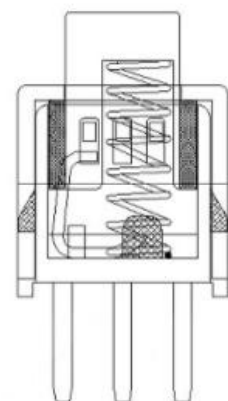
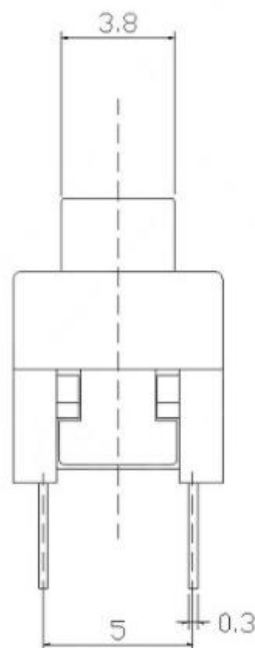


电路简图

常态：2-3导通 5-6导通
按下：1-2导通 4-5导通

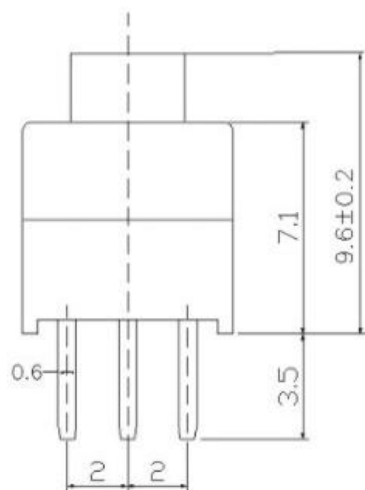

SPECIFICATIONS

1. Rating : DC 30V 0.1A
2. Circuit : 2P2T
3. Timing : Non-Shorting
4. Operating force : 160 ± 50 gf
5. Life test : 10,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
6	CONTACT(CLIP)	2	PHOSPHOR BRONZE	Ag-Plated
5	SPRING	1	STEEL	
4	TERMINAL	6	BRASS	Ag-Plated
3	BOTTOM CASE	1	PA66	BLACK
2	COPING CASE	1	PA66	WHITE
1	KNOB	1	POM	GREEN

P.C.B MOUNTING PATTERN



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5 ±0.2
Above 5 - 15 ±0.3
Above 15 - 30 ±0.4
Above 30 - 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	10/23/15		MODLE	PUSH SWITCH
CHECKED BY:	DATE	FINISH	SCALE	1:1
Jacky Chen	10/23/15		DWG NO.	
APPROVED BY:	DATE	SHEET NO.	PART NO.	
Tony Kao	10/23/15	1 of 1		

ITEM NO	DESCRIPTION	DRAWN	DATE
2	新增SPEC	Jack	102915
1	新增PIN編號	Jack	101215