


Order data/订货信息

Contacts/芯数	Coding	Part number/料号	Qty
02Pin	A-code	M08A02-04-029	1000pcs
03Pin	A-code	M08A03-04-029	1000pcs
04Pin	A-code	M08A04-04-029	1000pcs
05Pin	B-code	M08B05-04-029	1000pcs
06Pin	A-code	M08A06-04-029	1000pcs
08Pin	A-code	M08A08-04-029	1000pcs

Specifications/技术参数

Pin numbers/芯数	02 Pin	03 Pin	04 Pin			
Rated voltage/额定电压	60V	60V	60V			
Rated current/额定电流	4A	4A	4A			
Standards/regulations/标准	IEC 61076-2-104					
Termination接线方式	Dip-Solder/浸焊					
Connector locking system/锁紧方式	Screw螺锁					
Degree of protection/防护等级	IP67/IP68					
Mechanical operation/插拔次数	100 mating cycles Min					
Ambient temperature (operation)/工作温度	-25°C~+85°C					
Contact resistance/接触电阻	≤5mΩ					
Insulation resistance/绝缘电阻	≥1000MΩ					
Connector body material/胶芯材料	PA66					
Pin material/端子材料	Brass with gold plated					
Nut and shell material/螺母和铜壳材料	Brass with nickel plated					
Gasket material/胶圈材料	Fluorine ring/氟胶圈					
Black glue/黑色胶水	Epoxy resin/环氧树脂					

Pin assignment front view/针位分布前视图

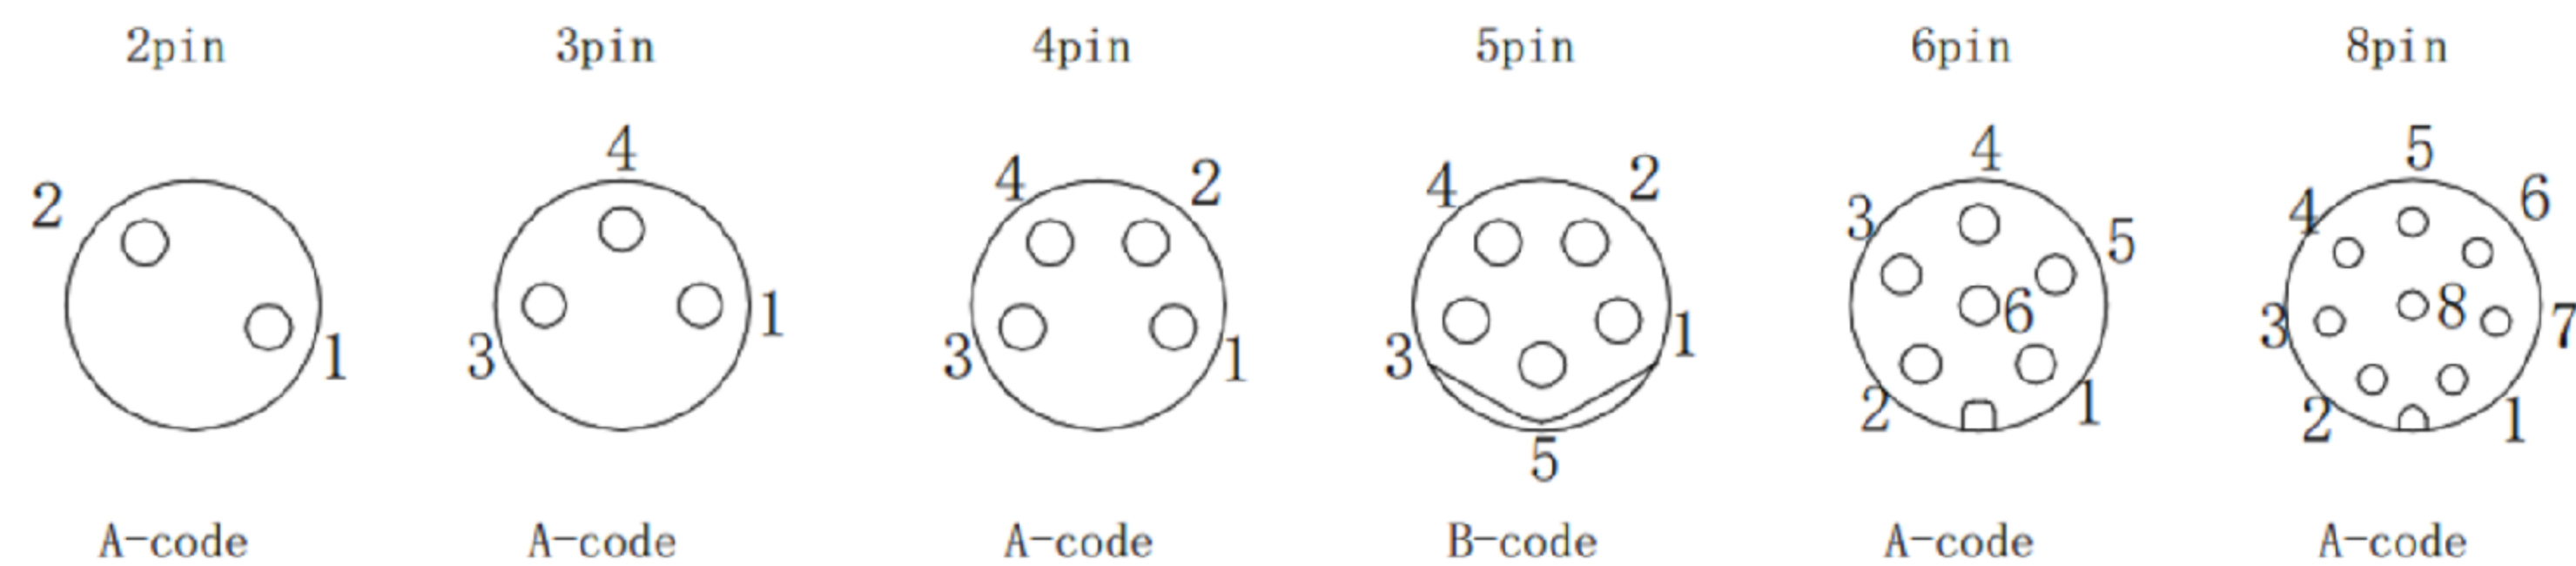


东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 12/13/19
DATE: 12/13/19
DATE: 12/13/19

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
M08XXX-04-029

SIZE
A4
VER
R1

ITEM NO. DESCRIPTION DRAWN DATE