


Order data/订货信息

Contacts/芯数	Coding	Part number/料号	Qty	Contacts/芯数	Coding	Part number/料号	Qty
02Pin	A-code	M12A02-08-067	1000pcs	02Pin	B-code	M12B02-08-067	1000pcs
03Pin	A-code	M12A03-08-067	1000pcs	03Pin	B-code	M12B03-08-067	1000pcs
04Pin	A-code	M12A04-08-067	1000pcs	04Pin	B-code	M12B04-08-067	1000pcs
05Pin	A-code	M12A05-08-067	1000pcs	05Pin	B-code	M12B05-08-067	1000pcs
06Pin	A-code	M12A06-08-067	1000pcs	02Pin	D-code	M12D02-08-067	1000pcs
07Pin	A-code	M12A07-08-067	1000pcs	03Pin	D-code	M12D03-08-067	1000pcs
08Pin	A-code	M12A08-08-067	1000pcs	04Pin	D-code	M12D04-08-067	1000pcs

Specifications/技术参数

Pin numbers/芯数	03Pin	04Pin	05Pin
Rated voltage/额定电压	50V/63V		
Rated current/额定电流	12A		
Standards/regulations/标准	IEC 61076-2-101		
Termination接线方式	Solder/焊线式		
Connector locking system/锁紧方式	Screw/螺锁		
Degree of protection/防护等级	IP67/IP68		
Wire gauge (mm <sup>2</sup> )/线规 (mm <sup>2</sup> )	0.14mm <sup>2</sup> ~0.75mm <sup>2</sup>		
Wire gauge (AWG)/线号 (AWG)	26AWG~18AWG		
Mechanical operation/插拔次数	100 mating cycles Min		
Ambient temperature (operation)/工作温度	-25℃~+85℃		
Contact resistance/接触电阻	≤5mΩ		
Insulation resistance/绝缘电阻	≥1000MΩ		
Connector body material/胶芯材料	PA66		
Pin material/端子材料	Brass with gold plated		
Screw material/螺丝材料	Brass with nickel plated		
Gasket material/胶圈材料	Fluorine ring/氟胶圈		


Pin assignment front view/针位分布前视图

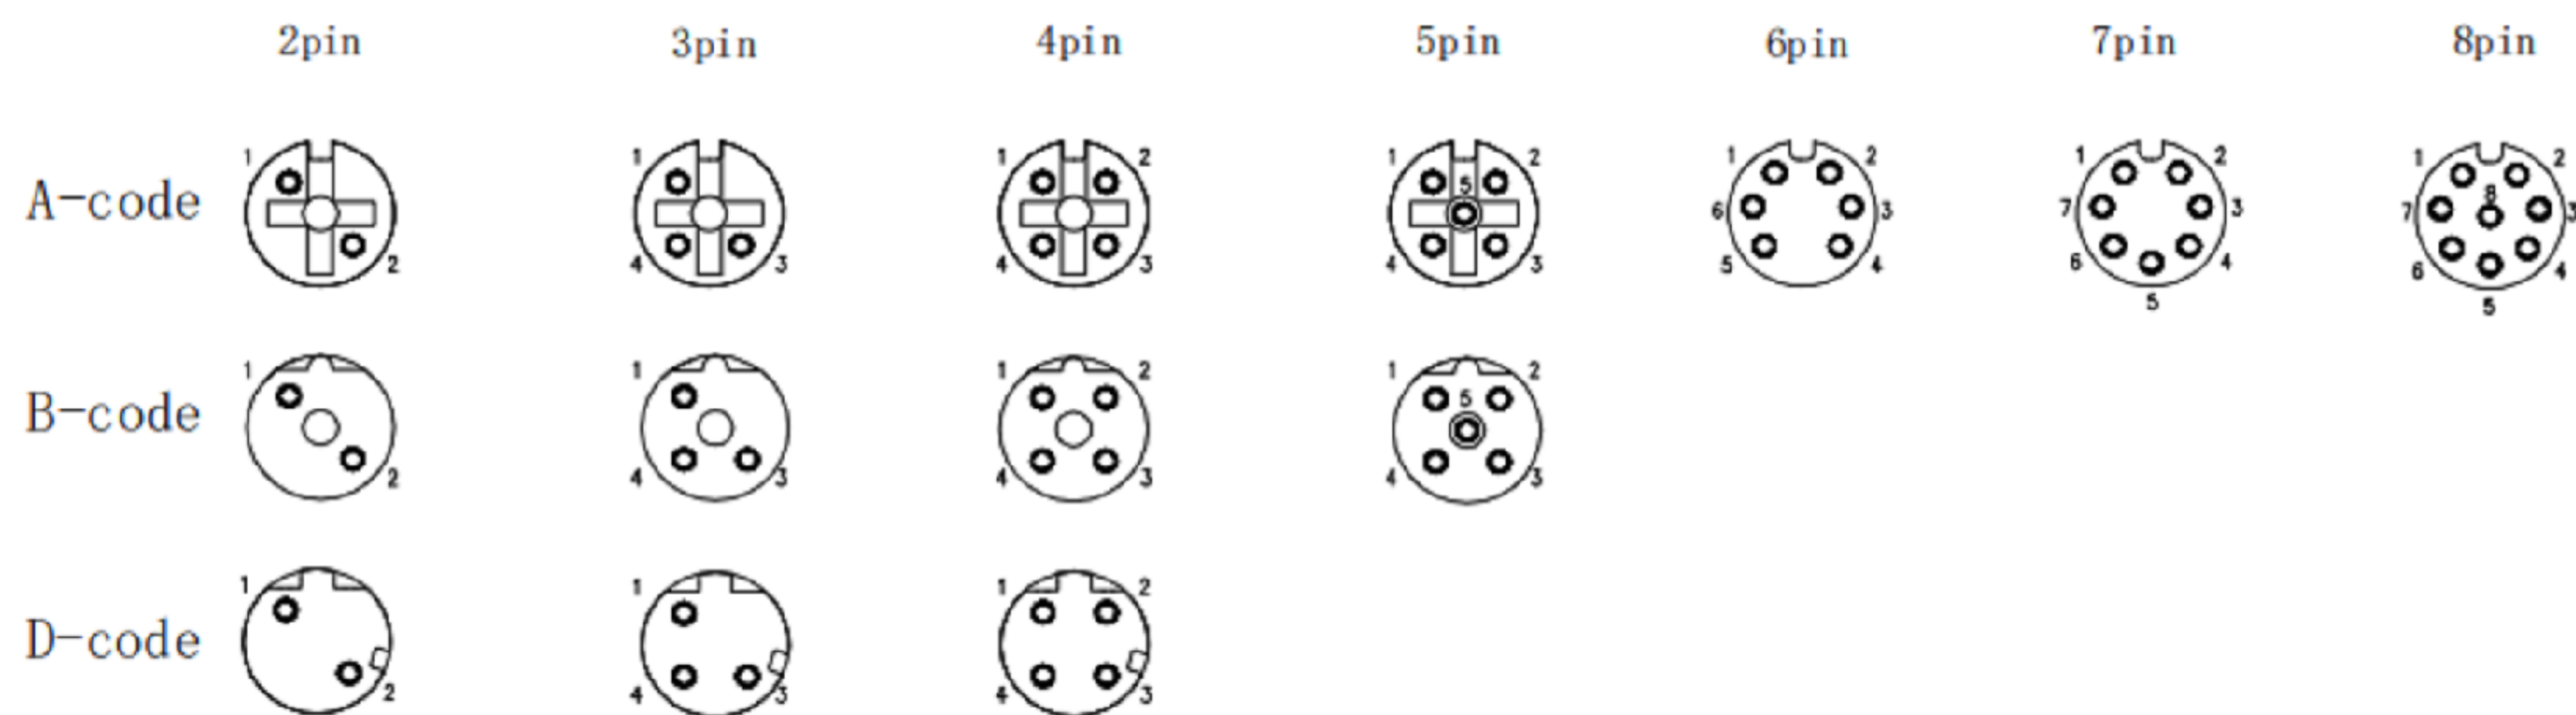

東莞市高迪電子有限公司  
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED: Up to 5 ±0.2, Above 5 ~ 15 ±0.3, Above 15 ~ 30 ±0.4, Above 30 ~ 50 ±0.5, Angle ±0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MATL	TITLE	CONNECTOR
Jack Lu	12/13/19	FINISH	MODLE	M12XXX-08-067
CHECKED BY:	DATE	SCALE	DWG NO.	
Jacky Chen	12/13/19	1:1		
APPROVED BY:	DATE	SHEET NO.	PART NO.	
Tony Kao	12/13/19	1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE