




RJ45母焊线板后插座(灌胶)(螺纹式)
RJ45 Female Back Mount Receptacle with wire(Threaded)


E13T - F R5 - PWF / M R5- NCA - 1 PV - JD

RJ45:
R5:5E
R6:6E

线长(M):
1:1M
2.5:2.5M
.....
线材:
PV:PVC
PU:PU
JD:接地
空:不接地

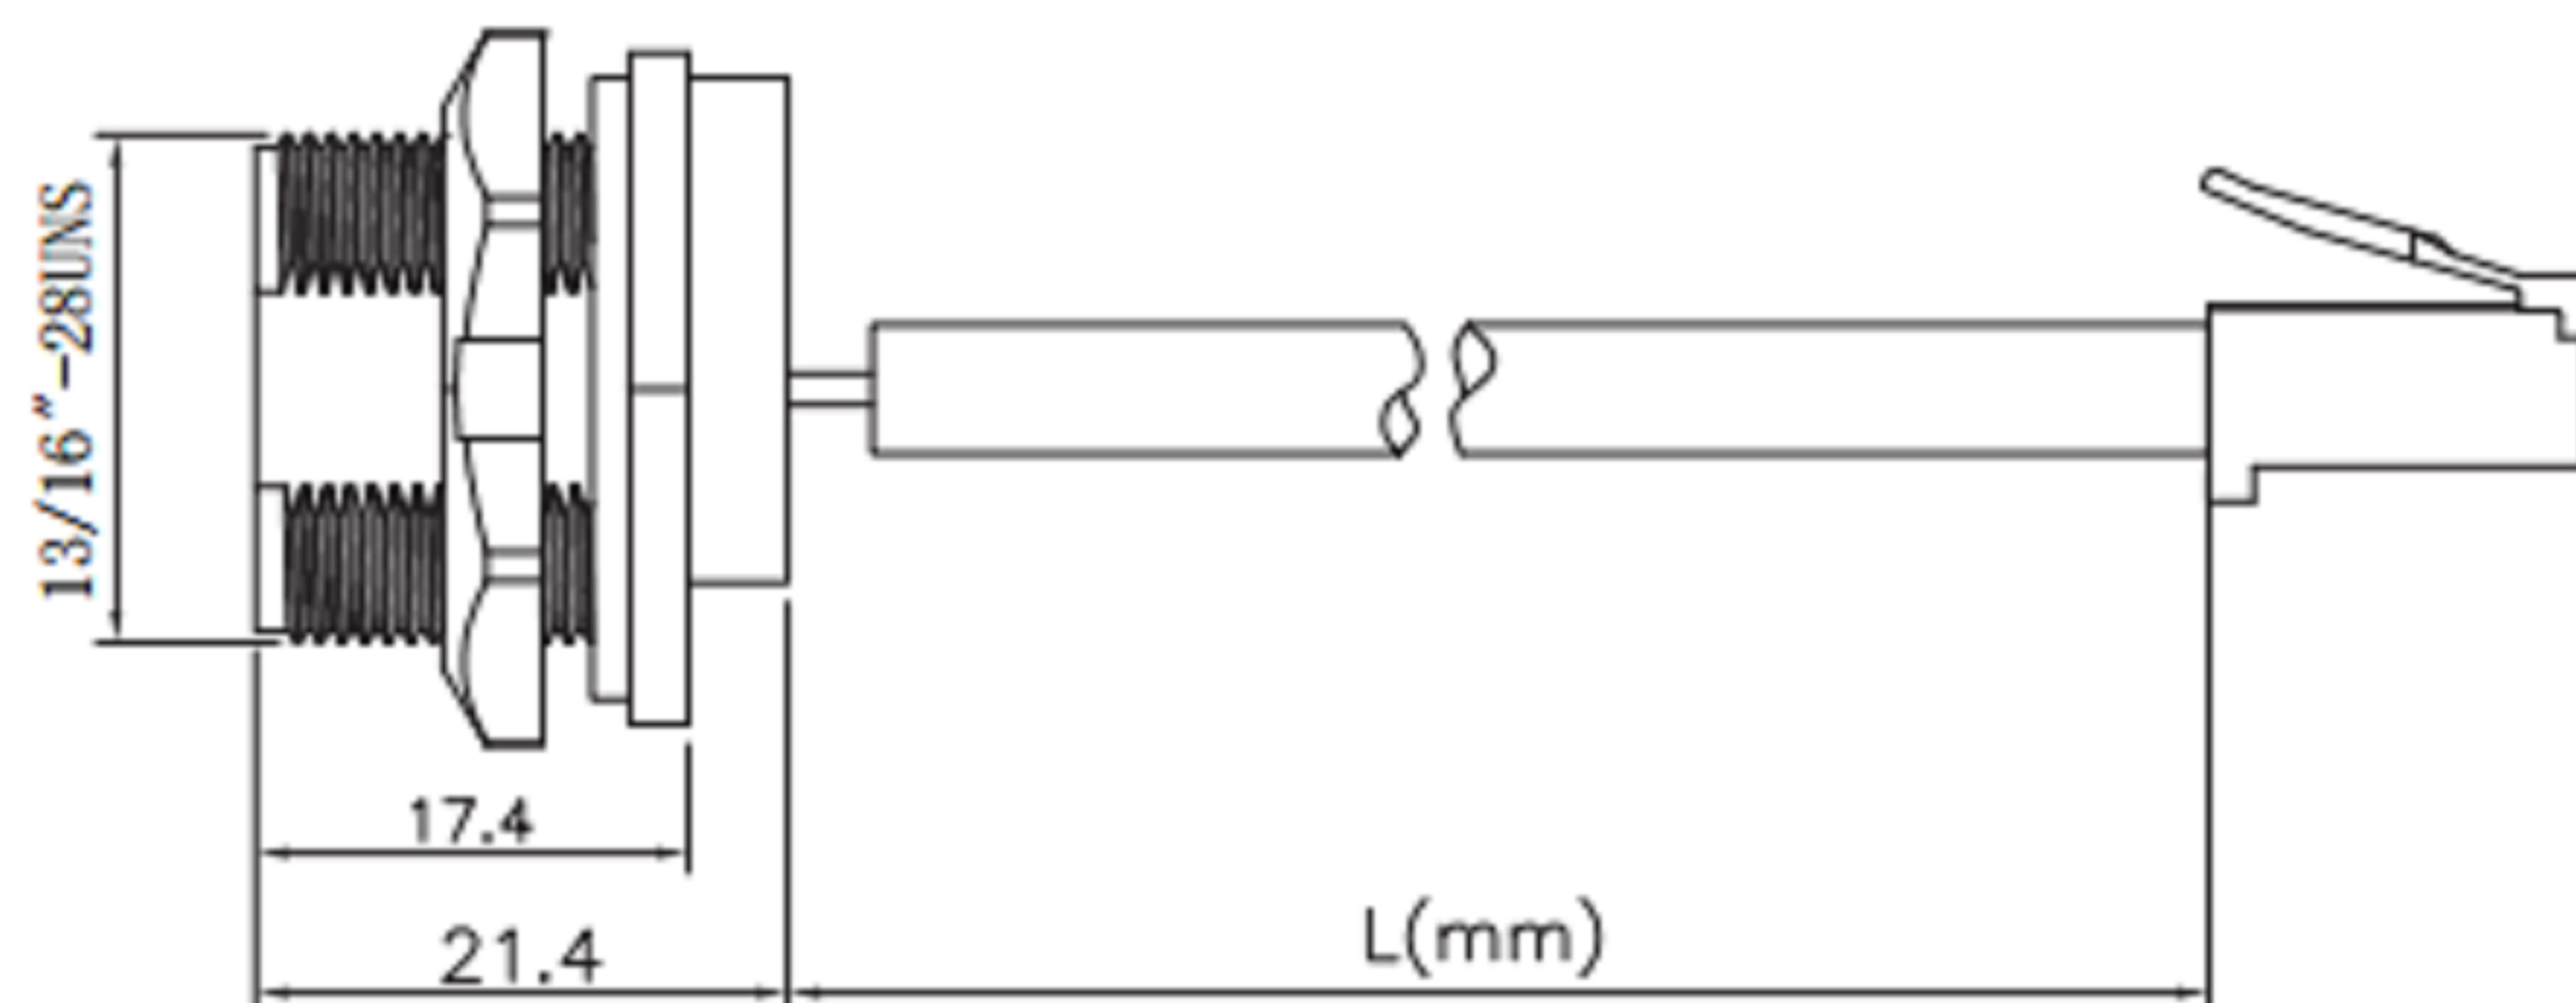

开孔尺寸
hole opening size

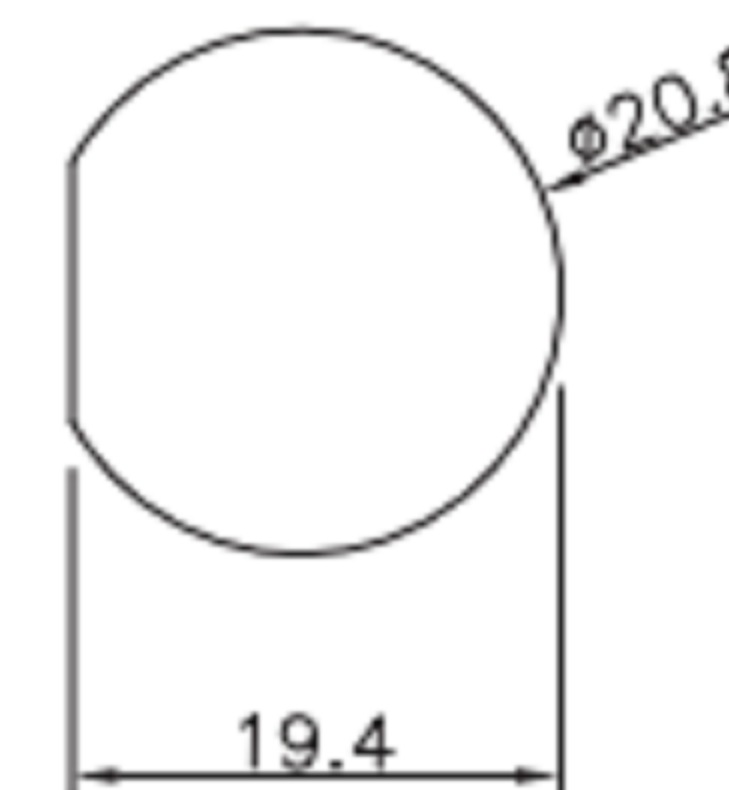

产品参数 PRODUCT PARAMETERS

壳体材料 Shell material	热塑性塑料PA66 阻燃等级: V-0 Thermoplastic plastic PA66, flame retardant grade: V-0	接触阻抗 Contact impedance	≤5mΩ
密封材料 Sealing material	环氧树脂/橡胶 Epoxy resin/Rubber	插拔次数 Durability	≥750次(Cycles)
插针材料 Contact material	磷铜镀金 Phosphorus copper gold-plated	适用温度 Applicable temperature	-30°C ~ +105°C
符合标准 Conform standard	CAT5e, CAT6a	接线范围 Wiring range	5.5mm~7.0mm

东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	12/13/19			
CHECKED BY:	DATE	FINISH	MODLE	E13T - F R5 - PWF
Jacky Chen	12/13/19			
APPROVED BY:	DATE	SCALE	DWG NO.	
Tony Kao	12/13/19	1 : 1		
		SHEET NO.	PART NO.	
		1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE

SIZE
A4
VER
R1