



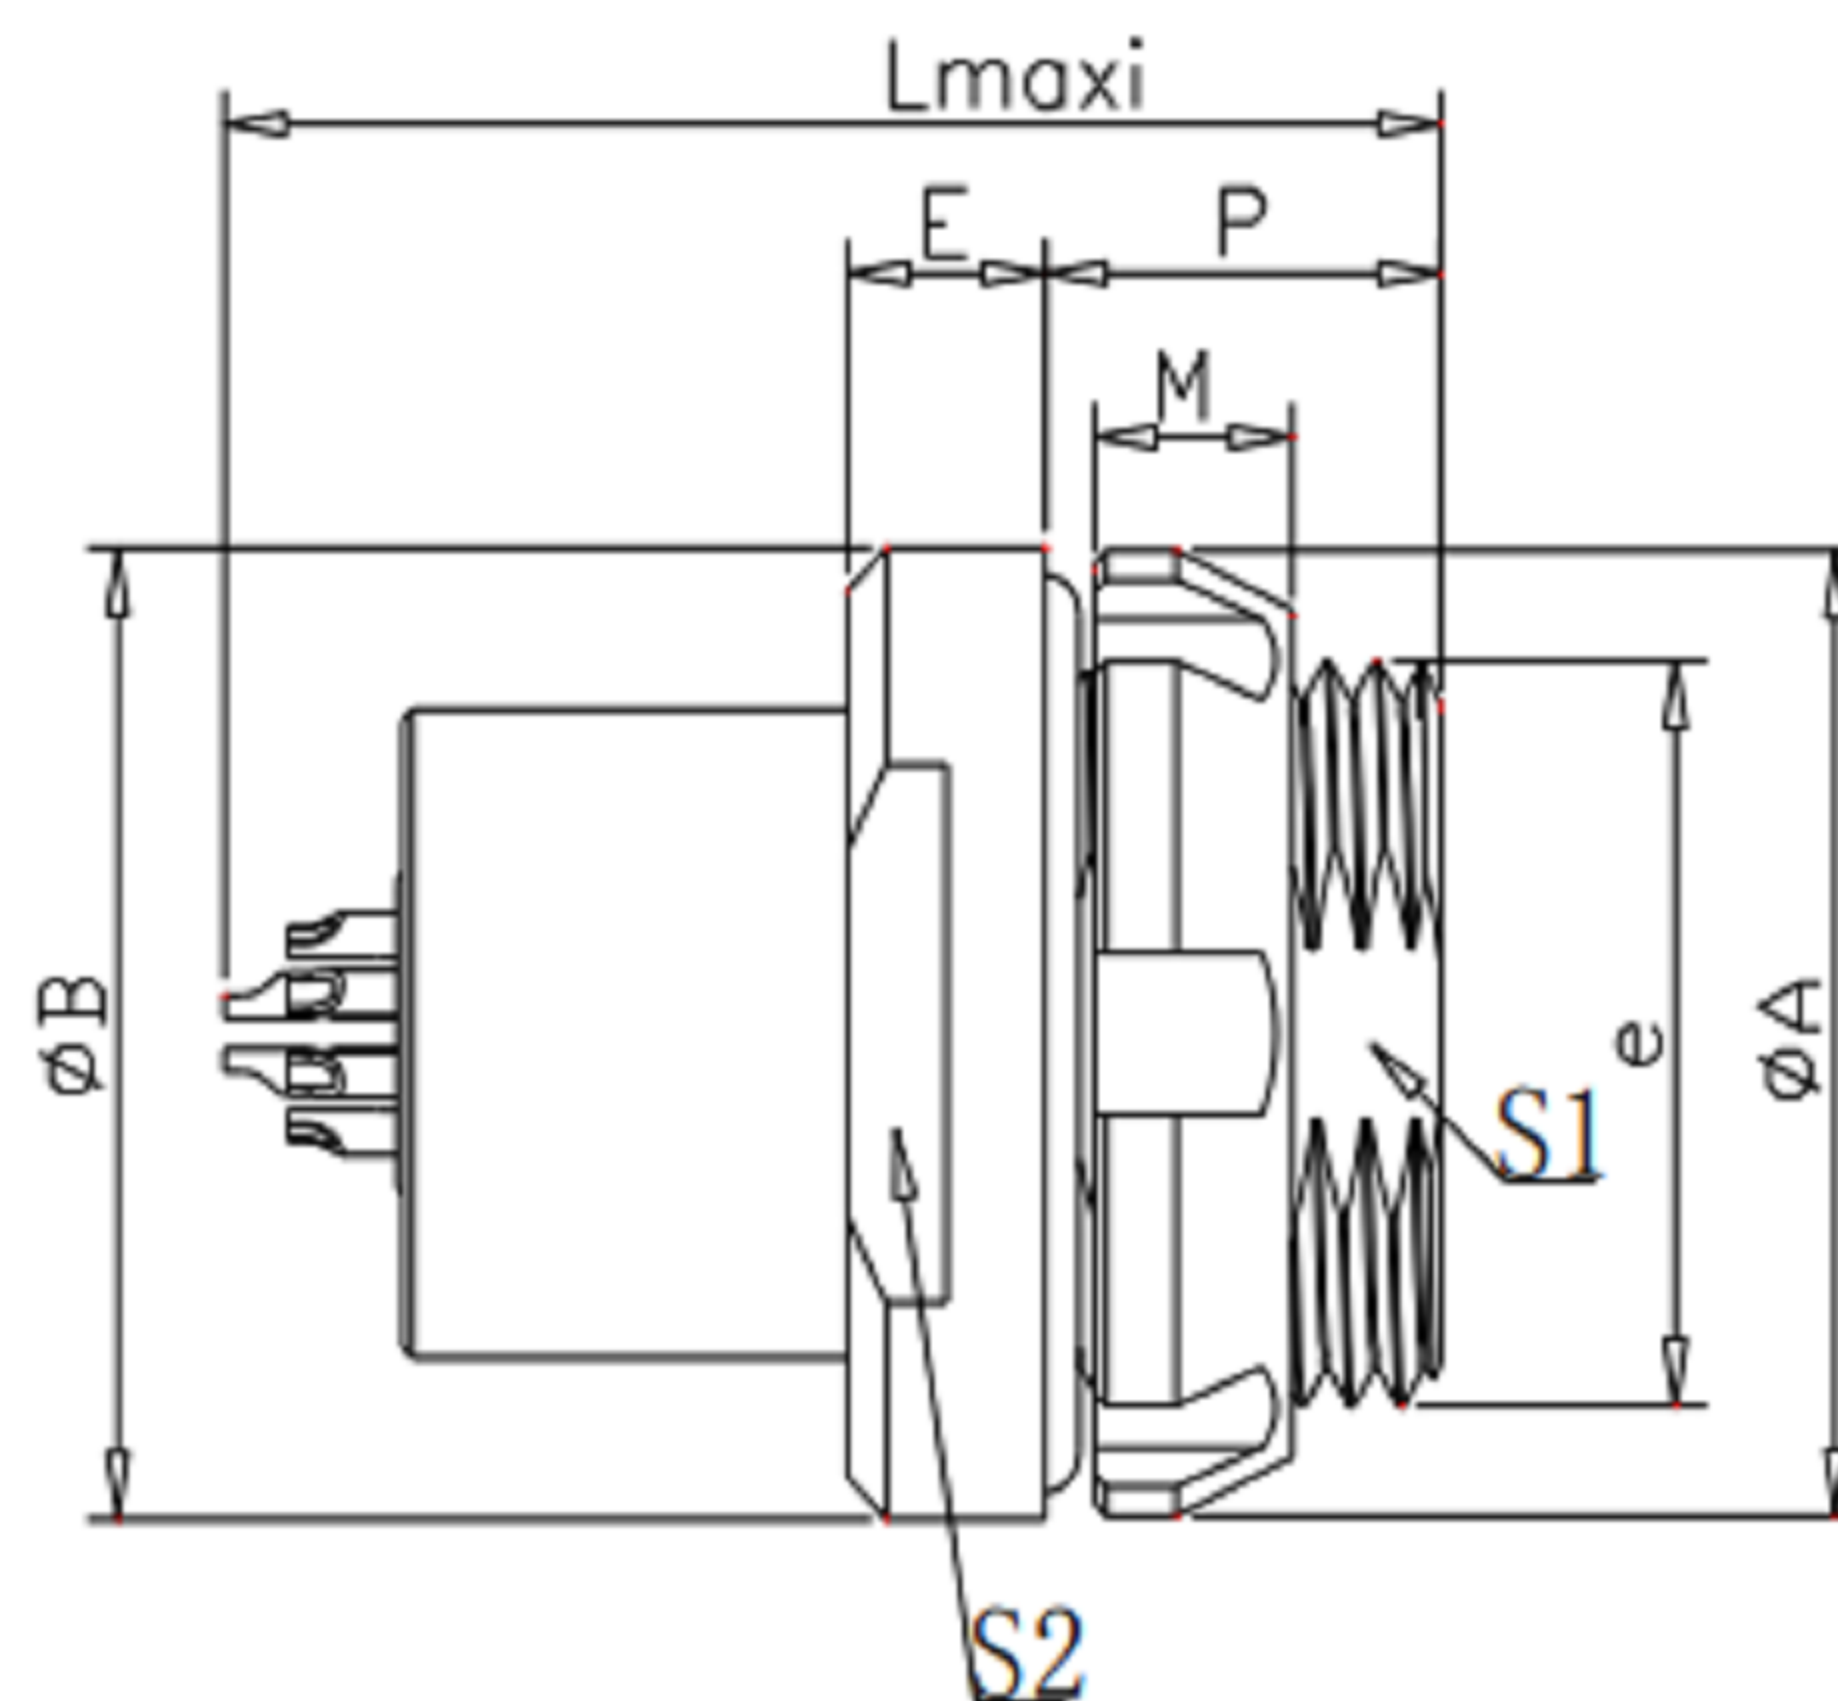

项目		尺寸								
系列	型号	A	B	e	L	E	M	P	S1	S2
0C	MEG	14	14.5	M9x0.5	21	3	3	6.5	8.2	12
1C	MEG	16	18	M14*1.0	26	4	4	8	12	15
2C	MEG	22	21	M16*1.0	29	4	4	7	14.8	18
3C	MEG	25	26	M20*1.0	33	4	3.5	8	18	22

MEG 固定式插座，螺母固定，定位销定位（G）或定位销（A、B、...）
水密封型或真空密封

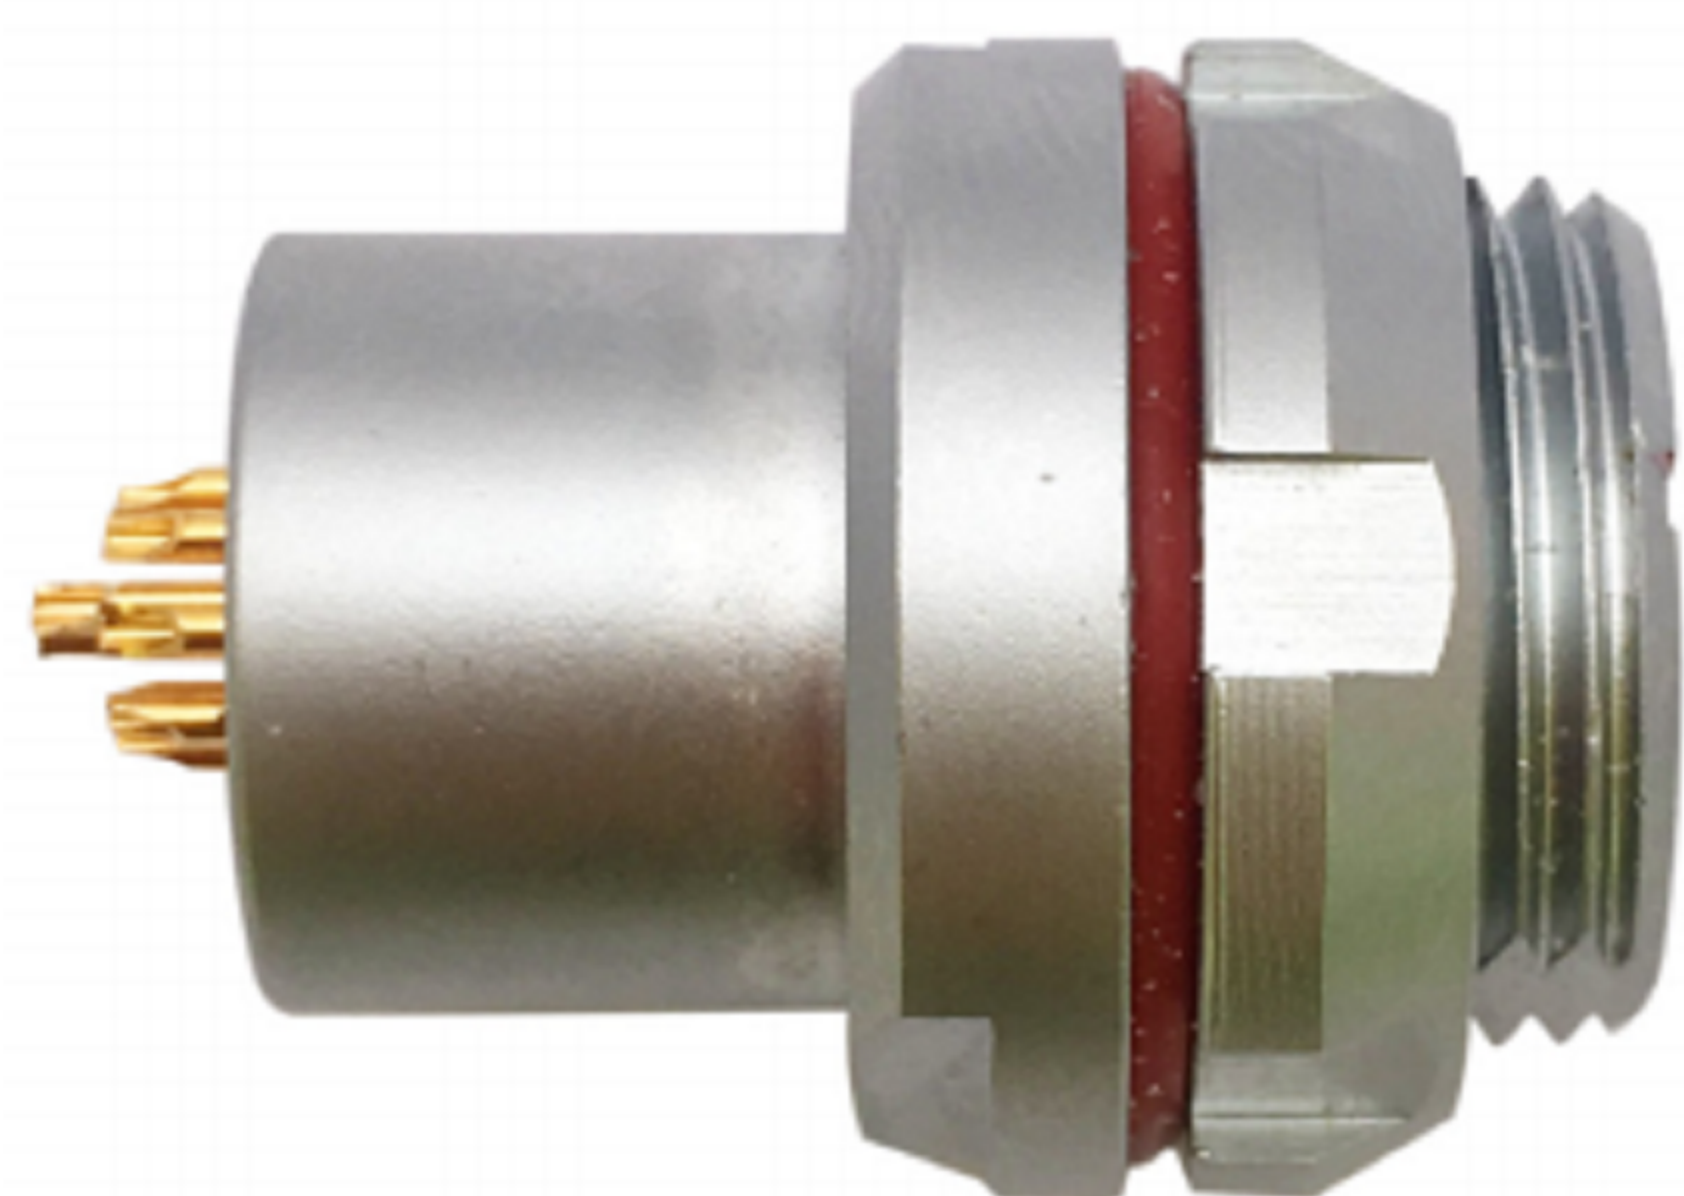

笔记

1. 额定电压：80V AC/DC
2. 额定电流：3A
3. 绝缘电压：1KV/DC 2mA 1min
4. 绝缘电阻：20M 500V
5. 工作温度：-40至105°C
6. 防护等级（IP代码）：IP67
7. RoHS、UL94V-0、防紫外线（紫外线功能）
8. 工作周期：2000（连接器无分断能力）
9. 面板厚度最大：4.0mm
10. 端接和连接：焊接端接或螺纹连接

東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED: Up to 5 ±0.2, Above 5 ~ 15 ±0.3, Above 15 ~ 30 ±0.4, Above 30 ~ 50 ±0.5, Angle ±0.3°
 3RD. ANGEL'S UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	12/13/19			
CHECKED BY:	DATE	FINISH	MODLE	MEG
Jacky Chen	12/13/19			
APPROVED BY:	DATE	SCALE	DWG NO.	
Tony Kao	12/13/19	1:1		
		SHEET NO.	PART NO.	
		1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE