
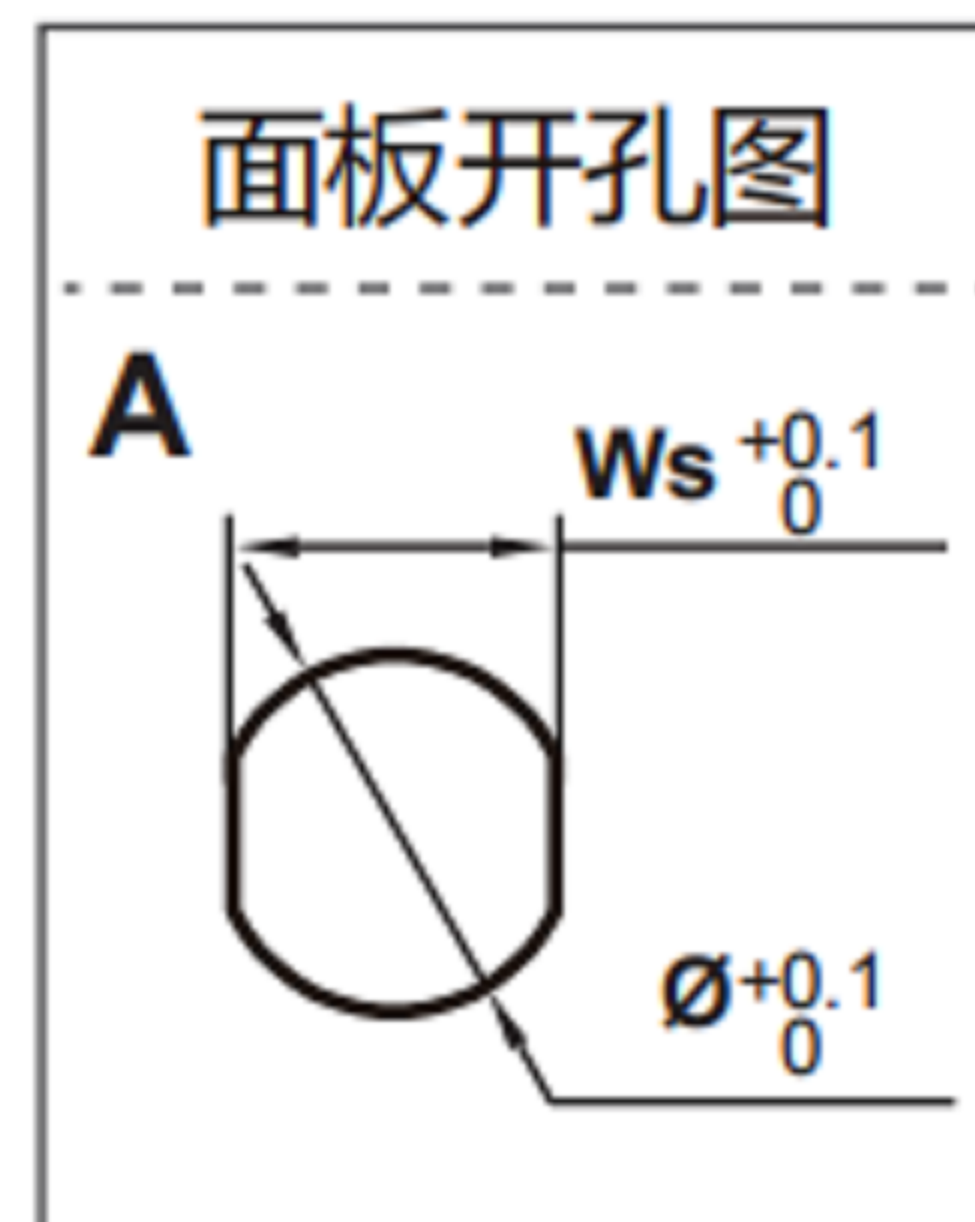


# Z7插座

固定式插座, 机箱内螺母固定, 定位销(G)或定位销(A--L)

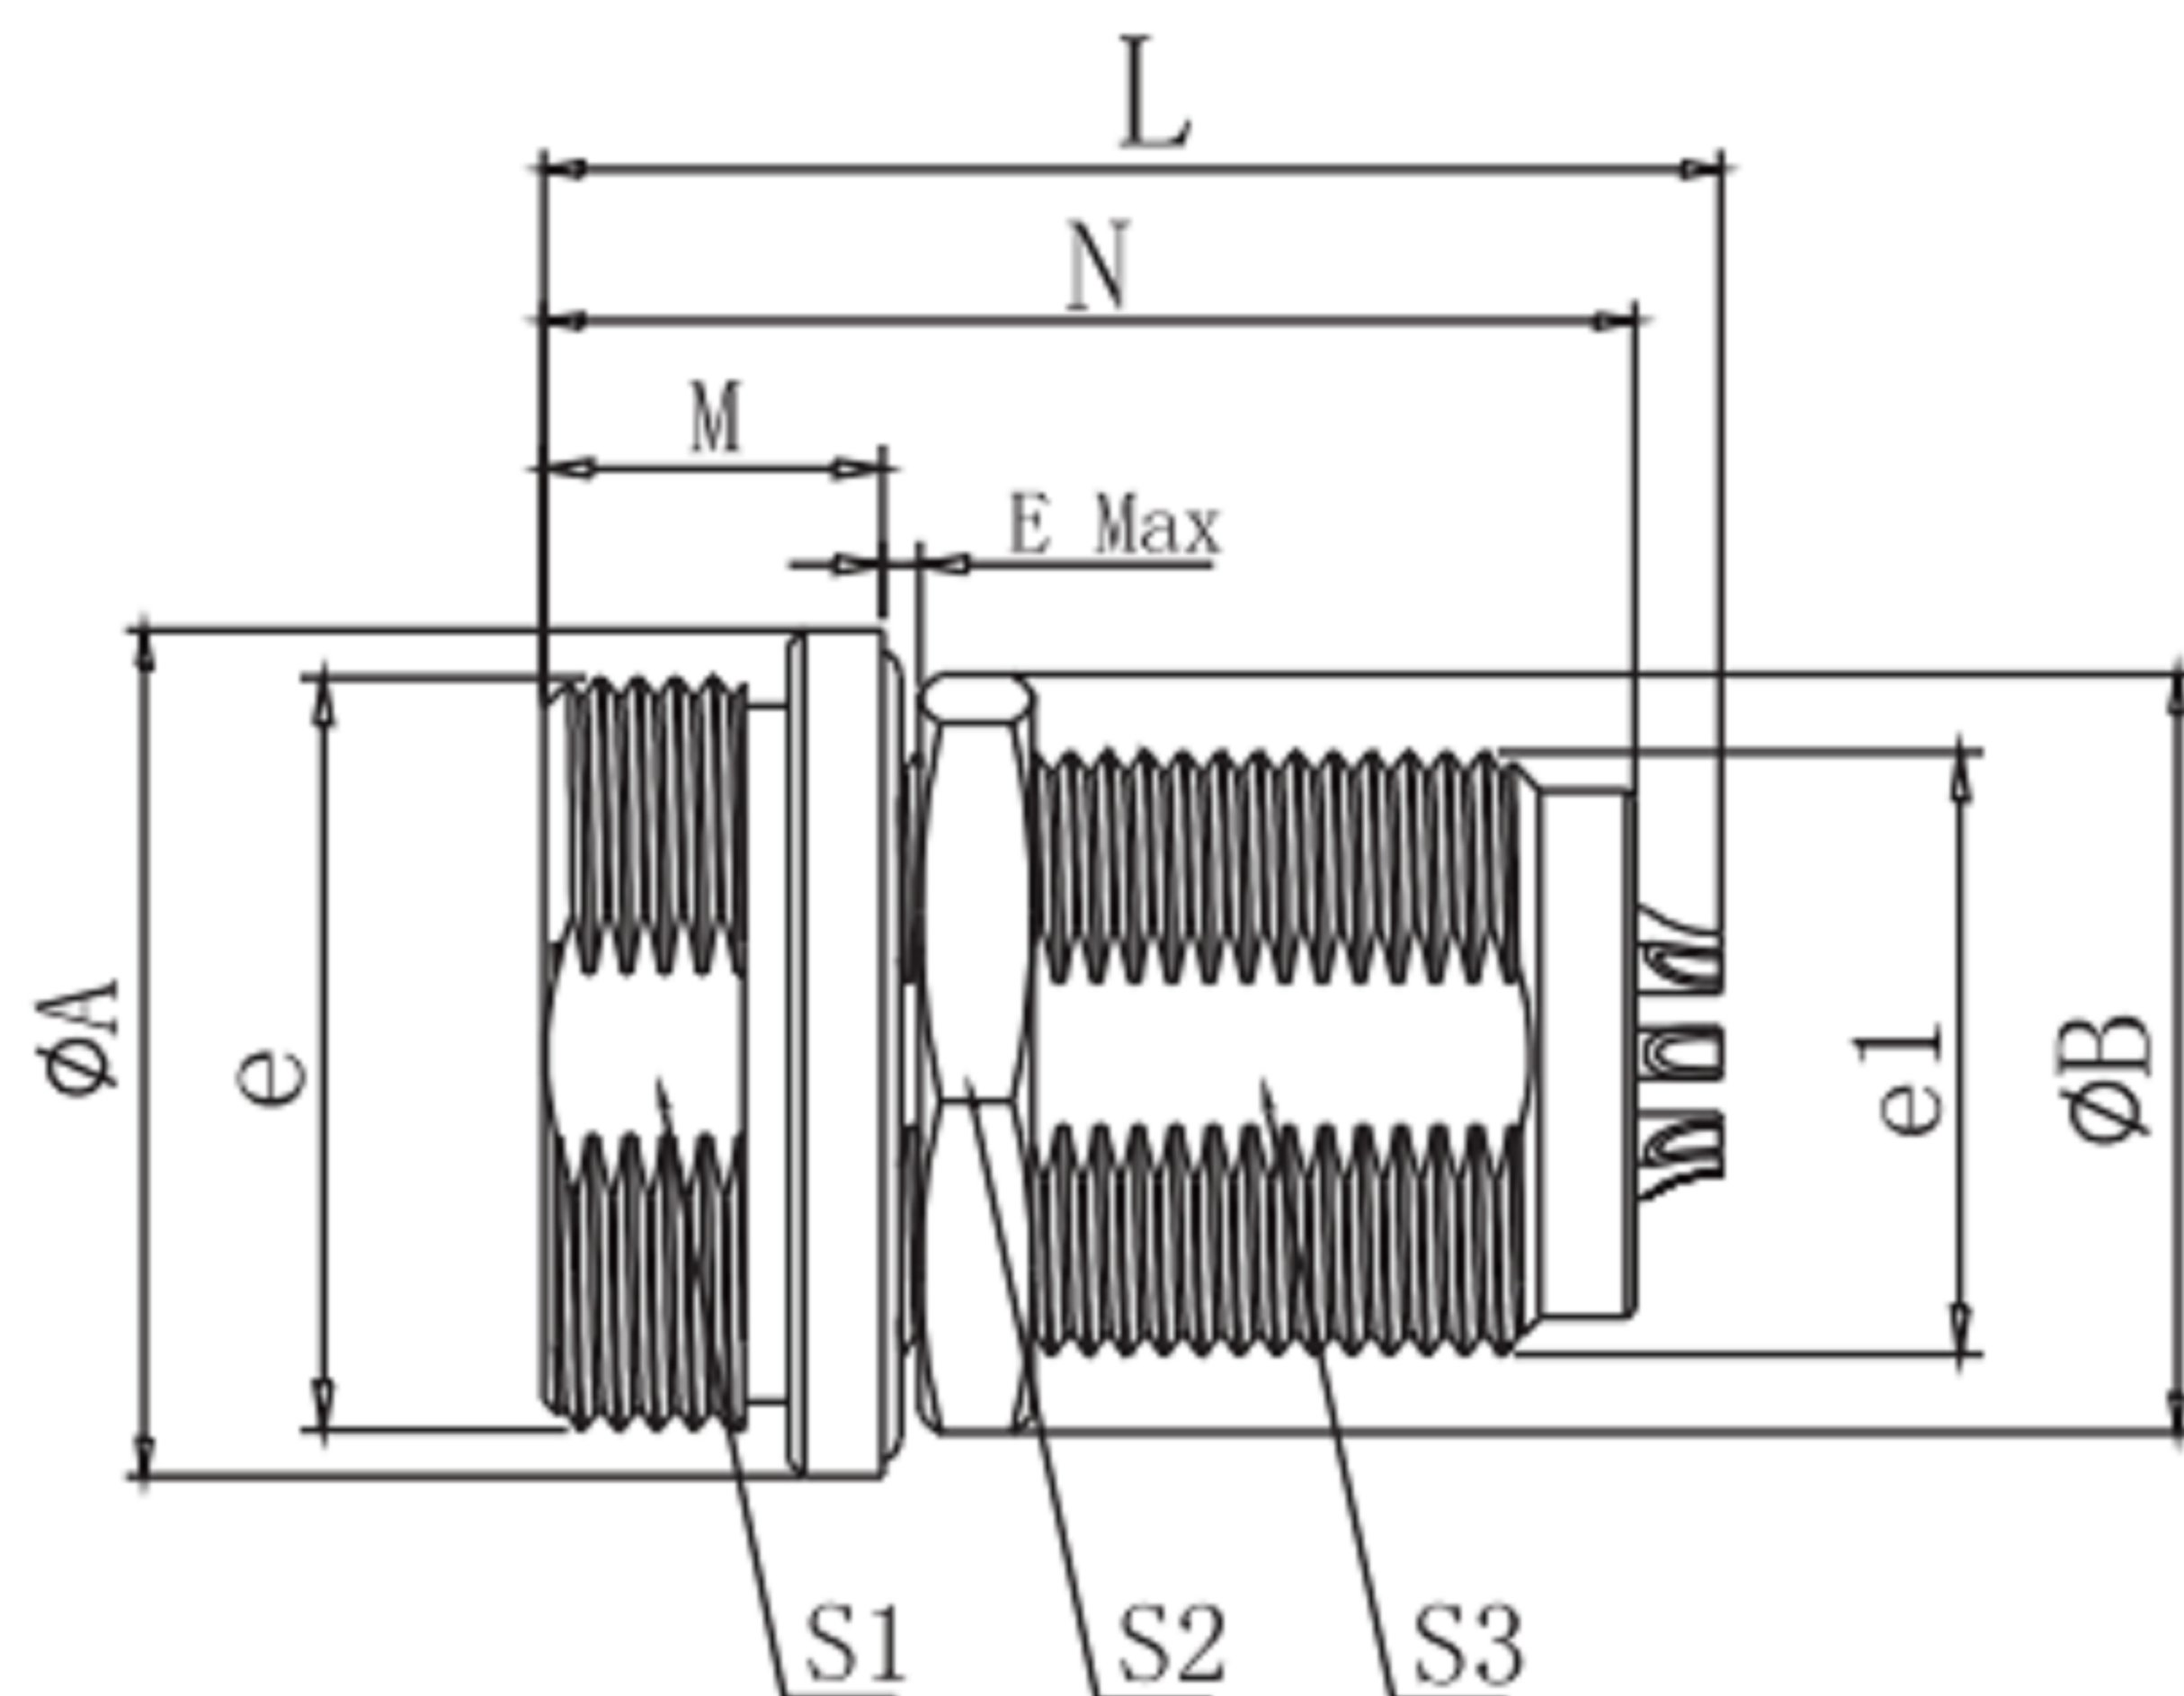

项目		尺寸(mm)											面板开孔尺寸(mm)		
系列	型号	A	B	L	M	N	E	S1	S2	S3	e	e1	Ws	Ø	种类
0W	Z7	16.2	16	21.9	8	18.9	6	12.5	14	10.5	M14*1.0	M12*1.0	10.6	12.1	A
1W	Z7	18.3	19.2	26.4	8	25	11	14.5	17	12.5	M16*1.0	M14*1.0	12.6	14.1	A
2W	Z7	22.5	21.9	31.3	9	29	12	18.5	19	14.5	M20*1.0	M16*1.0	14.6	16.1	A
3W	Z7	26.6	21.9	39.9	9.5	36	12	22.5	24	18.5	M24*1.0	M20*1.0	18.6	20.1	A

## 产品主要技术参数

特性	参数
锁紧方式	连接扣锁紧
工作温度	-55°C~+125°C
屏蔽性能	75dB(10MHz) 40dB(1GHz)
抗振动性能	15g[10Hz~2000Hz]

特性	参数
盐雾试验	96hr
抗冲击性能	100g,6ms
机械寿命	5000次
防护等级	IP68

东莞市高迪电子有限公司  
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED: Up to 5 ±0.2, Above 5 ~ 15 ±0.3, Above 15 ~ 30 ±0.4, Above 30 ~ 50 ±0.5, Angle ±0.3°  
3RD. ANGEL'S UNITS MM

DRAWN BY: Jack Lu	DATE: 12/13/19	MAT'L	TITLE: CONNECTOR
CHECKED BY: Jacky Chen	DATE: 12/13/19	FINISH	MODLE: Z7插座
APPROVED BY: Tony Kao	DATE: 12/13/19	SCALE: 1:1	DWG NO.
		SHEET NO: 1 of 1	PART NO.

ITEM NO.	DESCRIPTION	DRAWN	DATE

SIZE: A4  
VER: R1