


ZLN 插座真封型插座，外螺母固定结构，半圆金属防止误插

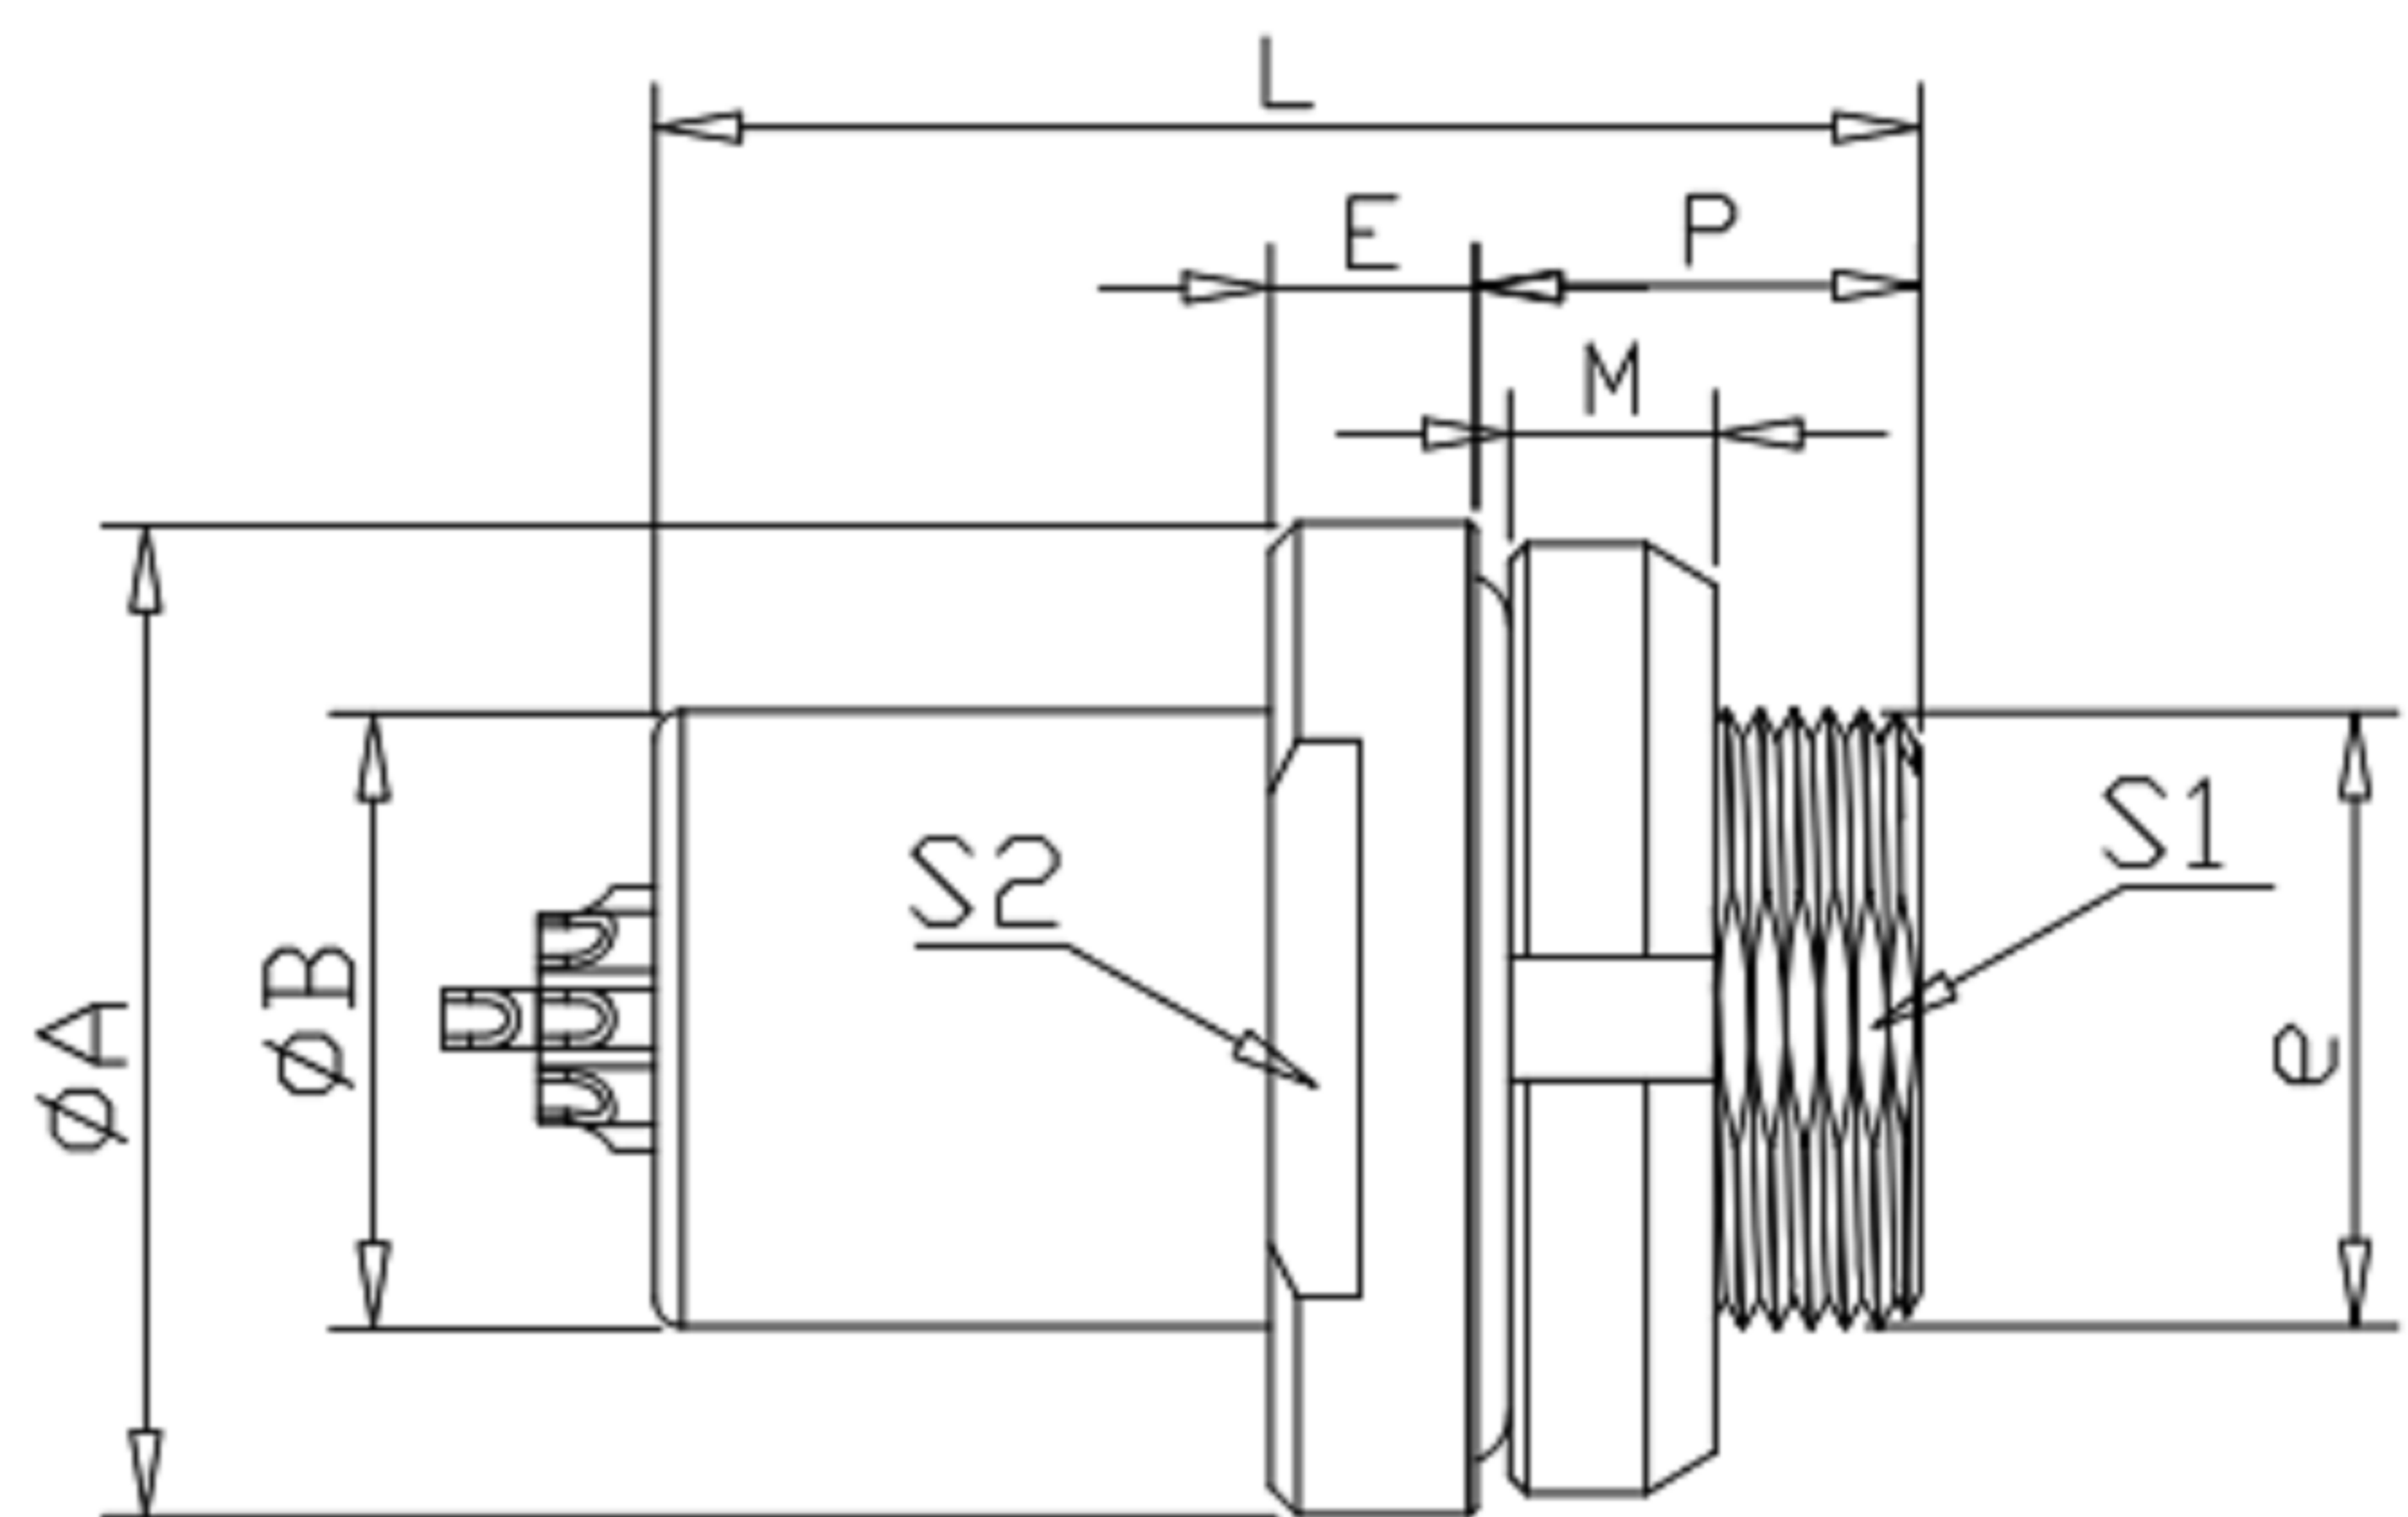

项目		尺寸								
系列	型号	A	B	e	L	E	M	P	S1	S2
102F	ZLN	13	9.0	M9x0.5	17	3.5	3	6.5	8.2	12
103F	ZLN	18	12	M14*1.0	21	4	4	8	12	15
1031F	ZLN	19	14	M14*1.0	19.5	4	4	7	12	15
104F	ZLN	22	16	M16*1.0	21.5	3.7	3.5	8	14.5	18
105F	ZLN	27	21	M20x1.0	26.5	4.5	5	10	18	22

F系列连接器主要特点:


- 安全的分瓣式推拉自锁系统;
- 多芯类型2-40芯;
- 焊接和印刷电路板针芯;
- 高密度安装, 节省空间;
- 内部半圆式定位, 防止误插;
- 360度屏蔽提供全方位的EMC 防护。

F系列连接器技术性能:

- 机械寿命: 3000次
- 振动: 频率10-20000Hz, 加速度147m/s², ≤1um瞬断
- 冲击: 加速度490m/s², ≤1um瞬断
- 工作温度: -55°C~+200°C
- 相对湿度: 40°C时, 达95%
- 防护等级: IP68
- 盐雾: 90h (不锈钢316L为145h)

 **东莞市高迪电子有限公司**
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

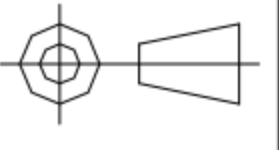3RD. ANGEL'S  UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	12/13/19		MODLE	ZLN
CHECKED BY:	DATE	FINISH	DWG NO.	
Jacky Chen	12/13/19			
APPROVED BY:	DATE	SCALE	PART NO.	
Tony Kao	12/13/19	1:1		
SHEET NO. 1 of 1			SIZE	A4
			VER	R1