


电路原理图

SCHEMATIC

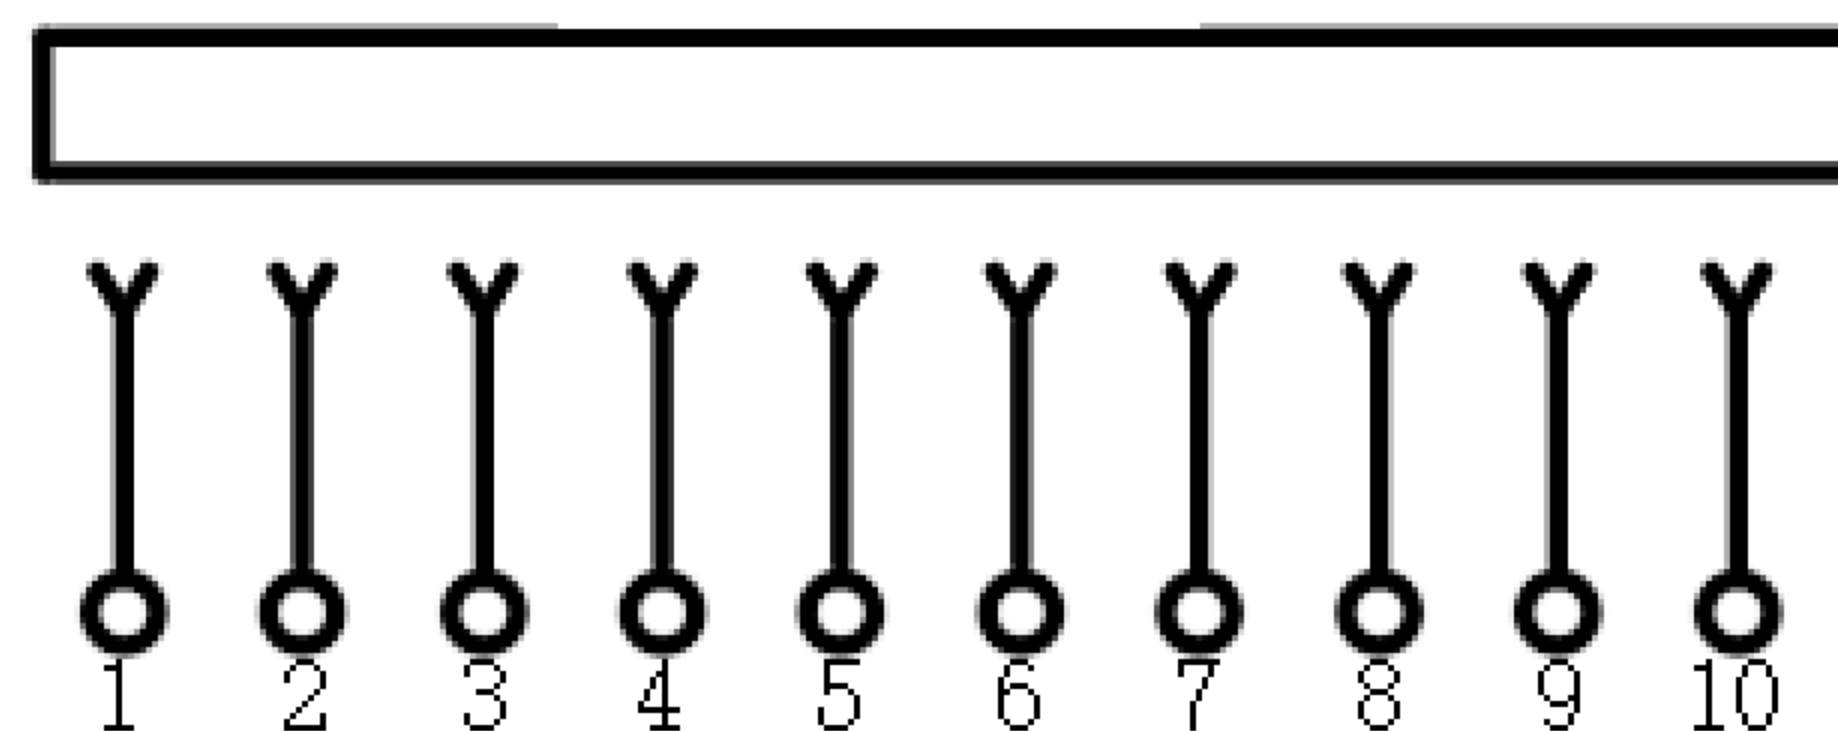


主要技术特性要求:

1. 使用条件:
  - 环境温度:  $-25^{\circ} \sim 70^{\circ}$
  - 相对湿度: 95% ( $40^{\circ}$ )
2. 额定负荷: 500VAC 1到3号为15A, 4到10号为3A.
3. 接触电阻:  $\leq 10\text{m}\Omega$
4. 绝缘电阻:  $\geq 100\text{M}\Omega$
5. 耐压: 800V AC (50Hz) 1min
6. 插拔力: 15-50N
7. 寿命: 200次

 东莞市高迪电子有限公司  
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED: Up to 5  $\pm 0.2$ , Above 5 ~ 15  $\pm 0.3$ , Above 15 ~ 30  $\pm 0.4$ , Above 30 ~ 50  $\pm 0.5$ , Angle  $\pm 0.3^{\circ}$

3RD. ANGEL'S  UNITS MM

DRAWN BY:	DATE	MATL	TITLE	CONNECTOR
Jack Lu	12/13/19			
CHECKED BY:	DATE	FINISH	MODLE	GD-TX-M10-3+7-G
Jacky Chen	12/13/19			
APPROVED BY:	DATE	SCALE	DWG NO.	
Tony Kao	12/13/19	1:1		
		SHEET NO.	PART NO.	
		1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE

SIZE	A4
VER	R1