


电路原理图
SCHEMATIC

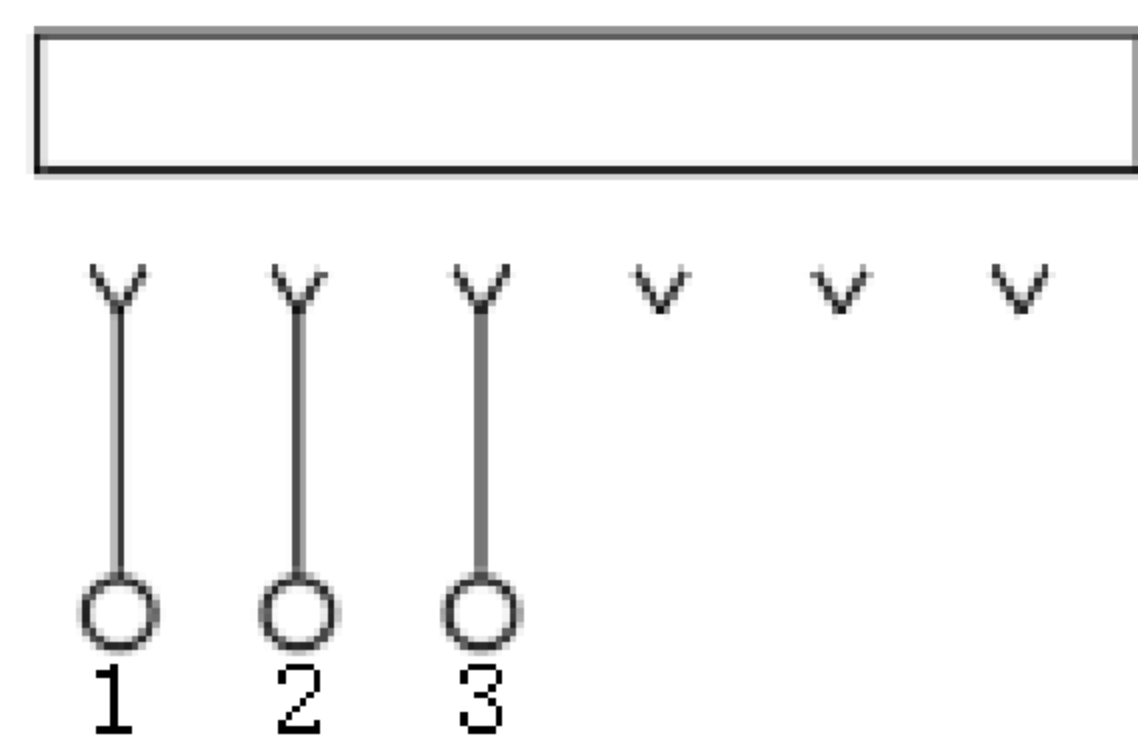

主要技术特性要求:

1. 使用条件:
环境温度: $-25^{\circ}\sim 70^{\circ}$
相对湿度: 95% (40°)
2. 额定负荷: 500VAC 15A,
3. 接触电阻: $\leq 10\text{m}\Omega$
4. 绝缘电阻: $\geq 10\text{M}\Omega$
5. 耐压: 800V AC (50Hz) 1min
6. 插拔力: 15-50N
7. 寿命: 200次

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^{\circ}$

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	12/13/19			
CHECKED BY:	DATE	FINISH	MODLE	GD-TX-M10-3-G32
Jacky Chen	12/13/19			
APPROVED BY:	DATE	SCALE	DWG NO.	
Tony Kao	12/13/19	1:1		
		SHEET NO.	PART NO.	
		1 of 1		