


主要技术特性要求:

1. 环境温度: -25~80℃
2. 额定电流: 电源Pin:13A; 信号Pin:2A
3. 接触电阻: ≤20mΩ
4. 绝缘电阻: ≥20MΩ
5. 耐压: 500V AC (50Hz) 1min
6. 插拔力: 40~80N
7. 公母对插寿命: ≥300次
8. 符合RoHS2.0及其修订指令要求
9. 未注尺寸公差按GB/T14486-2008 MT5
10. 阻燃符合UL94-V0

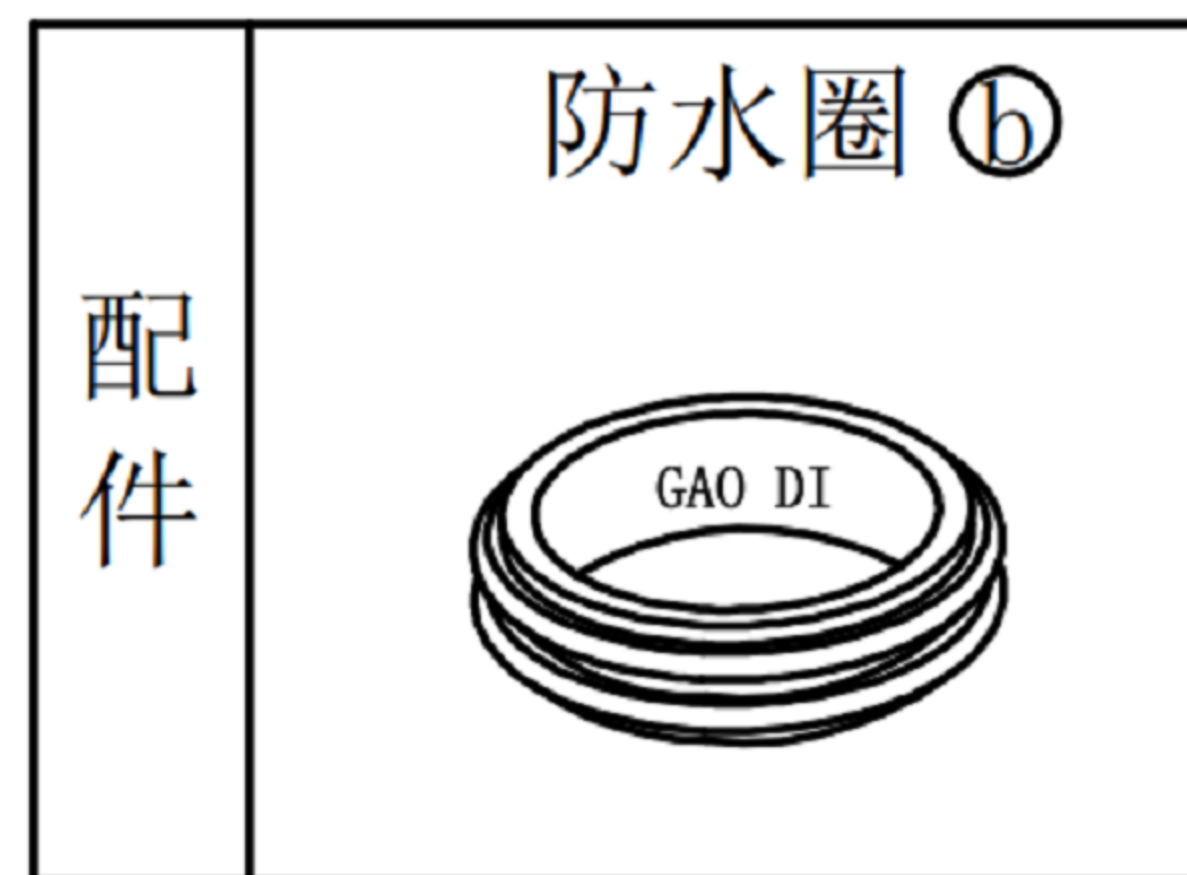

序号	零件图号	零件名称	数量	工艺类别	材料/规格型号	表面处理	备注
5	8.370.0044	防水圈	1	模压成型	硅橡胶	红色	独立包装出货
4	8.510.0735	大针	3	车削加工	Hpb59-1黄铜	镀金1μ"	
3	8.510.0737	小长针	1	车削加工	Hpb59-1黄铜	镀金1μ"	
2	8.510.0736	小针	6	车削加工	Hpb59-1黄铜	镀金1μ"	
1	8.005.0540	基座	1	注塑成型	PA66+GF30%	黑色	

東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	12/13/19			
CHECKED BY:	DATE	FINISH	MODLE	GD-TX-Y1010AM
Jacky Chen	12/13/19			
APPROVED BY:	DATE	SCALE	DWG NO.	
Tony Kao	12/13/19	1:1		
SHEET NO.	1 of 1	PART NO.		

SIZE
A4
VER
R1