


主要技术特性要求:

1. 环境温度: -25~80°C
2. 额定电流: 电源Pin: 33A; 信号Pin: 4A
3. 接触电阻: ≤20mΩ
4. 绝缘电阻: ≥20MΩ
5. 耐压: 500V AC (50Hz) 1min
6. 插拔力: 不装配防水圈60N-120N
7. 公母对插寿命: ≥3000次
8. 符合RoHS2.0及其修订指令要求
9. 未注尺寸公差按GB/T14486-2008 MT5
10. 阻燃符合UL94-V0

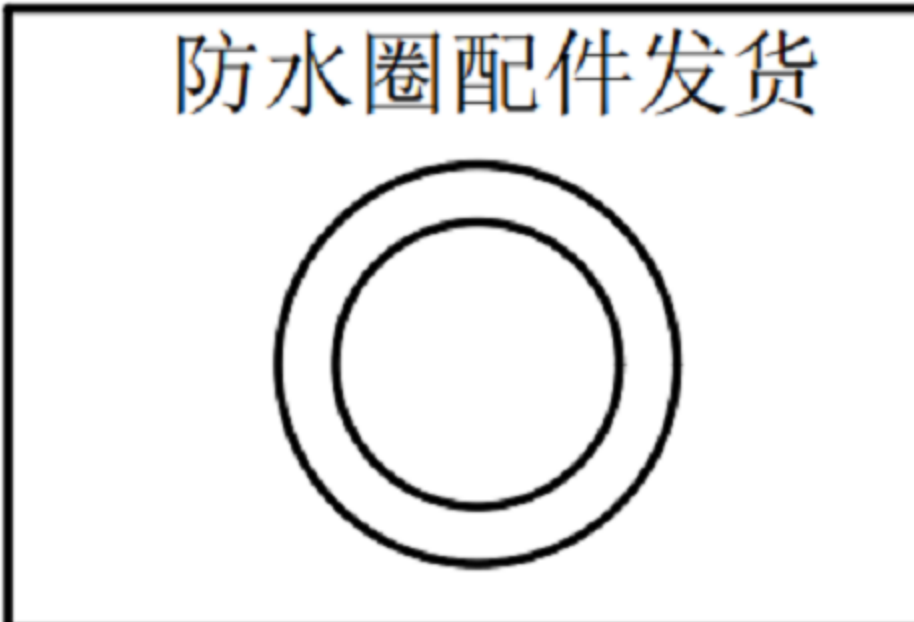

5	8.370.0034	防水圈	2	模压成型	硅橡胶 φ7.5*φ1	红色	配件发货
4	8.510.0592	大针	2	车削加工	Hpb59-1黄铜	镀金1μ"	
3	8.510.0618	小长针	1	车削加工	C54400磷青铜	镀金1μ"	
2	8.510.0611	小针	4	车削加工	C54400磷青铜	镀金1μ"	借用DJ-NY1017AM小针
1	8.005.0325	基座	1	注塑成型	PA66+GF30%	PANTONE432C黑	
序号	零件图号	零件名称	数量	工艺类别	材料/规格型号	表面处理	备注

東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	12/13/19			
CHECKED BY:	DATE	FINISH	MODLE	GD-TX-Y714AM
Jacky Chen	12/13/19			
APPROVED BY:	DATE	SCALE	DWG NO.	
Tony Kao	12/13/19	1:1		
SHEET NO.	1 of 1	PART NO.		

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------

SIZE	A4
VER	R1