

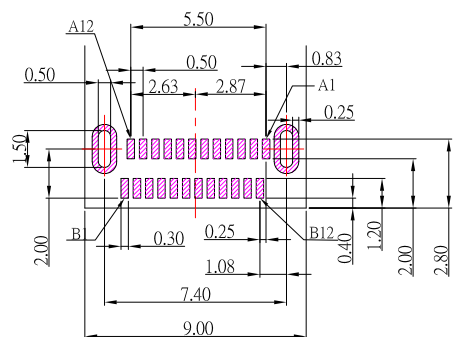

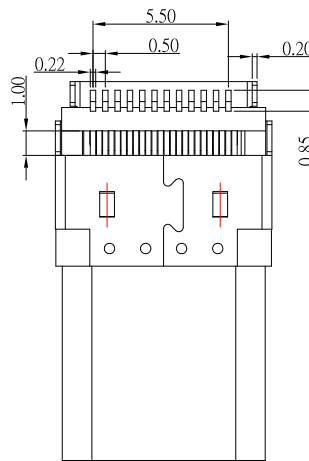
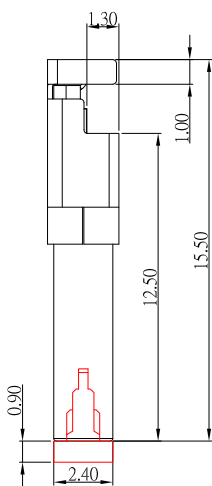


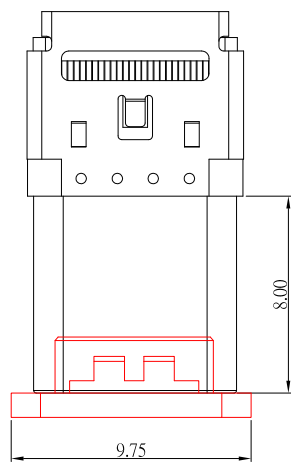

SBC-241PLM3-31x-S338

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"



P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

1. Rating: 5.0A(for VBUS),0.25A(for other)
- 2.Contact Resistance: 40 mΩ Max
- 3.Insulation Resistance: 100 MΩ Min
- 4.Dielectric Withstanding Voltage: 100V AC

Mechanical:

- 1.Connector Mate and Unmate Force
 - 1.1 Mate force: 5~20 N
 - 1.2 Unmate force: 8~20 N

Material:

- 1.Housing: LCP,UL 94V-0
- 2.Contact: C7025
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTx1	Positive half of first SuperSpeed TX differential pair	B11	SSRx1	Negative half of first SuperSpeed RX differential pair
A3	SSTx1	Negative half of first SuperSpeed TX differential pair	B10	SSRx1	Positive half of first SuperSpeed RX differential pair
A4	Vbus	Bus Power	B9	Vbus	Bus Power
A5	CC1	Configuration Channel	B8	SRB2	Sideband Use (SRU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SRB1	Sideband Use (SRU)	B5	CC2	Configuration Channel
A9	Vbus	Bus Power	B4	Vbus	Bus Power
A10	SSRx2	Negative half of second SuperSpeed RX differential pair	B3	SSTx2	Positive half of second SuperSpeed TX differential pair
A11	SSRx2	Positive half of second SuperSpeed RX differential pair	B2	SSTx2	Negative half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

9	更新CAP樣式	Jack	112422
8	更新材質	Jack	121021
7	新增尺寸	Jack	071921
6	新增PCB LAYOUT尺寸	Jack	042921
5	新增防塵蓋尺寸	Jack	121120
4	新增防塵蓋	Jack	120820
3	更新為A0版	Jack	121417
2	更新PIN定義	Jack	033017
1	更新零件樣式	Jack	090916
ITEM NO.	DESCRIPTION	DRAWN	DATE



TOLERANCE UNLESS OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	11/24/22			
CHECKED BY:	DATE	FINISH	MODLE	TYPE C Male SMT 沉板,板上H:1.6mm
Jacky Chen	11/24/22			
APPROVED BY:	DATE	SCALE	DWG NO.	SBC-241PLM3-31x-S338
Tony Kao	11/24/22	1 : 1	PART NO.	SBC-241PLM3-31x-S338
		SHEET NO.	1 of 1	SIZE A4
				VER R9