



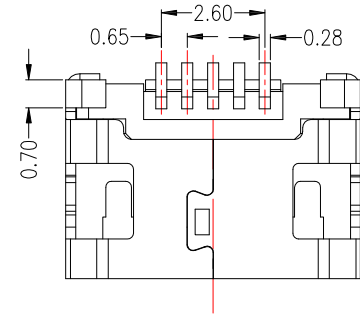


MRUSB-5B-D2Bx-S347

SHELL 鍍層:





| |
|----|
| TN |
| NI |

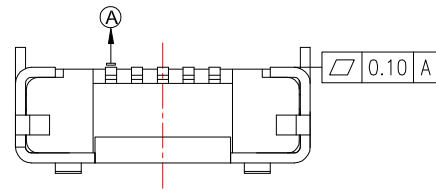

- NOTES:
- MATERIAL:
- 1.1 HOUSING: LCP, UL94V-0, Black
 - 1.2 CONTACT: PHOSPHOR BRONZE
 - 1.3 SHELL: BRASS
- FINISH:
- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
 - 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER OR
TIN UNDER PLATED SURFACE LAYER
- 3.SPECIFICATION:
- 3.1 RATING: 1.5A(PIN1&8), 1.0A(PIN2&3&4)
 - 3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC
 - 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
 - 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
 - 3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.
 - 3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.
 - 3.7 TEMPERATURE RANGE: -30°C ~ +80°C



SECTION A-A'

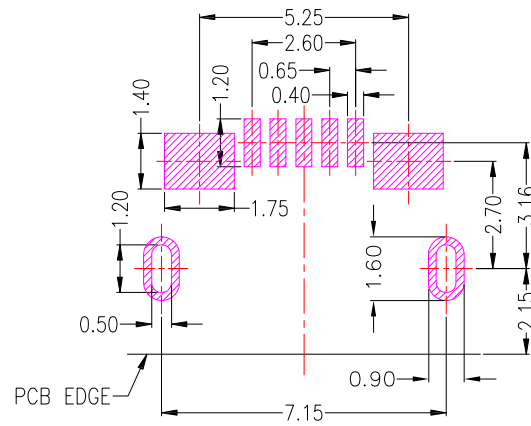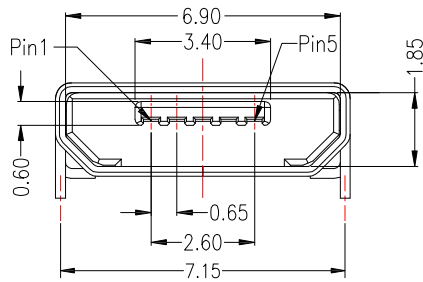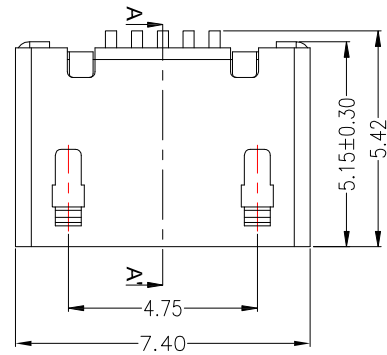

P.C.B LAYOUT MOUNTING PATTERN



TOLERANCE UNLESS OTHERWISE STATED:

| | |
|---------------|-------|
| Up to 5 | ±0.2 |
| Above 5 ~ 15 | ±0.3 |
| Above 15 ~ 30 | ±0.4 |
| Above 30 ~ 50 | ±0.5 |
| Angle | ±0.3° |

3RD. ANGEL'S

UNITS MM

| | | | | |
|--------------|----------|-----------|----------|-------------------------------------|
| DRAWN BY: | DATE | MAT'L | TITLE | CONNECTOR |
| Jack Lu | 01/16/19 | | | |
| CHECKED BY: | DATE | FINISH | MODLE | MICRO USB 5P/F 贴片 无捲边 无柱 前插(7.15)后贴 |
| Jacky Chen | 01/16/19 | | | |
| APPROVED BY: | DATE | SCALE | DWG NO. | MRUSB-5B-D2Bx-S347 |
| Tony Kao | 01/16/19 | 1 : 1 | PART NO. | MRUSB-5B-D2Bx-S347 |
| | | SHEET NO. | 1 of 1 | |
| | | | | SIZE A4 |
| | | | | VER R1 |

| | | | |
|----------|-------------|-------|--------|
| 1 | 新增尺寸 | Jack | 011619 |
| ITEM NO. | DESCRIPTION | DRAWN | DATE |