




MRUSB-5B-M14xx-S347

Shell Material : SHELL 鍍層:

Blank : BRASS
A : SUS

TN
NI

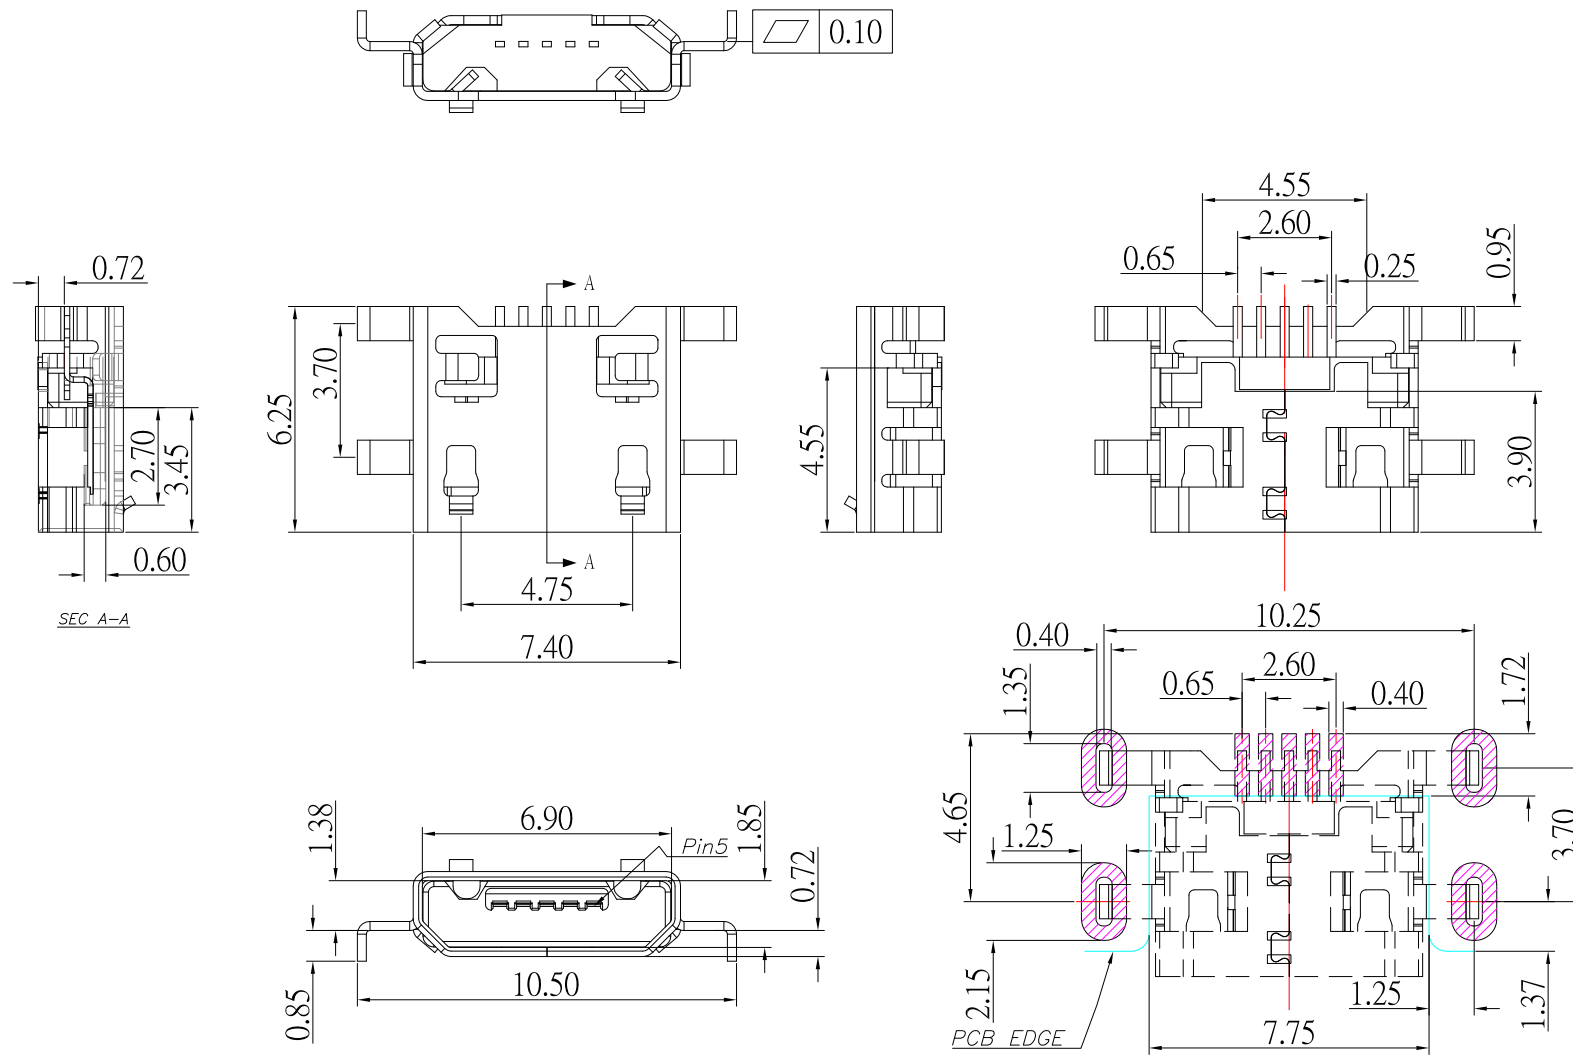

SPECIFICATIONS

- Electrical:**
- 1.Current Rating: 1.8A(PIN1&5) ,1.0A(PIN2&3&4)
 - 2.Contact Resistance: 30 mΩ Max
 - 3.Dielectric Withstanding Voltage: 100 V for 1 min
 - 4.Insulation Resistance: 100 MΩ Min

- Material:**
- 1.Housing: LCP
 - 2.Contact: Phosphor Bronze
 - 3.Shell: BRASS / SUS

- Finish:**
- 1.Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
 - 2.Shell: Nickel under Plated surface layer or
Tin under Plated surface layer

P.C.B LAYOUT MOUNTING PATTEN



TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S



DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	09/11/18		MODLE	MICRO USB 四腳插 沉板0.8 腳長0.85 無捲邊 無接地腳
CHECKED BY:	DATE	FINISH	DWG NO.	MRUSB-5B-M14xx-S347
Jacky Chen	09/11/18		PART NO.	MRUSB-5B-M14xx-S347
APPROVED BY:	DATE	SCALE	SHEET NO.	1 of 1
Tony Kao	09/11/18	1 : 1		
				SIZE A4
				VER R3

3	更新PCB LAYOUT尺寸	Jack	091118
2	新增PCB LAYOUT尺寸	Jack	091018
1	新增尺寸	Jack	082818
ITEM NO.	DESCRIPTION	DRAWN	DATE