



SUA-110M7B-30xHF-S277

鍍層厚度:

Blank	: 1u"
2	: 15u"
3	: 30u"

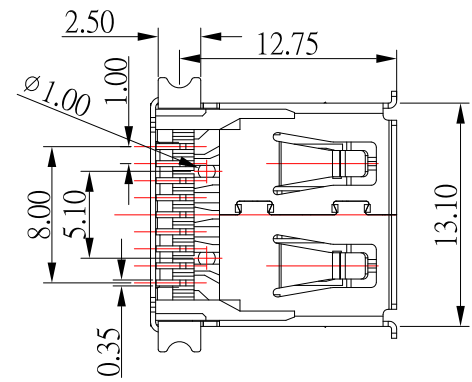

PCB EDGE
RECOMMENDED PCBA LAYOUT

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

- NOTE:
- MATERIAL:
 - Housing: LCP
 - Contact: Phosphor Bronze
 - Shell: Brass
 - Finish:
 - Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
 - Shell: Nickel under Plated surface layer
 - SPECIFICATION:
 - Current Rate: 1.5 A
 - insulator Resistance: 100MΩ Min
 - Dielectric Strength: 100V AC
 - Contact Resistance: 30mΩ Max
 - Operation Temperature: -40°C ~ +85°C

東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	04/11/23			
CHECKED BY:	DATE	FINISH	MODLE	USB 3.0 AF SMT本體長=14.45mm, 板上高7.0 有捲邊
Jacky Chen	04/11/23			
APPROVED BY:	DATE	SCALE	DWG NO.	SUA-110M7B-30xHF-S277
Tony Kao	04/11/23	1 : 1	PART NO.	SUA-110M7B-30xHF-S277
		SHEET NO.	1 of 1	
			SIZE	A4
			VER	R

ITEM NO.	DESCRIPTION	DRAWN	DATE