

P.C.B LAYOUT MOUNTING PATTERN

**SPECIFICATIONS**

**Electrical:**


- 1.Current Rating: 1.5A / contact terminal
- 2.Voltage Rating: 30 VDC
- 3.Contact Resistance: 30 mΩ Max
- 4.Dielectric Withstanding Voltage: 500 V AC AT Sec Level
- 5.Insulation Resistance: 1,000 MΩ Min

**Material:**

- 1.Housing: PBT
- 2.Contact: Brass
- 3.Shell: Brass / Spcc

**Finish:**

- 1.Contact: Plated Gold in Mating Area ;  
Tin Plated on Solder Balls  
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

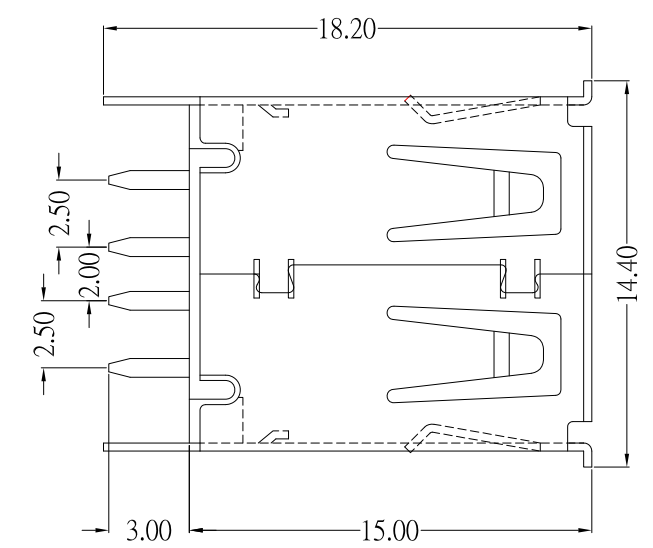

**SUA-110V23Ax-x-S236**

SHELL :	Color :
Blank : Brass	Black : B
I : SPCC	White : W



TOLERANCE UNLESS OTHERWISE STATED :  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	12/15/21		MODLE	USB AF 直立式 插板彎腳有捲邊 L15.0mm 腳距 2.10mm
CHECKED BY:	DATE	SCALE	DWG NO.	SUA-110V23Ax-x-S236
Jacky Chen	12/15/21	1 : 1	PART NO.	SUA-110V23Ax-x-S236
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	12/15/21			

1	更新料號	Jack	121521
ITEM NO.	DESCRIPTION	DRAWN	DATE