




P.B.C LAYOUT



CW ROTATION

Detent position

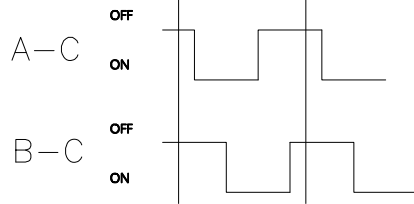

12 pulse 12 click

CW ROTATION

SPECIFICATIONS

|                    |               |
|--------------------|---------------|
| Rating             | DC 12V , 50mA |
| Contact Resistance | 100mΩ Max.    |
| Rotational Force   | 10±5 gf       |

| ITEM | NAME          | MATERIAL                    |
|------|---------------|-----------------------------|
| 1    | Cover         | Stainless Steel (Ni Plated) |
| 2    | Anchor Plate  | Stainless Steel             |
| 3    | Wheel gear    | PA                          |
| 4    | Base          | PA                          |
| 5    | ContactSpring | Phosphor Bonze              |
| 6    | Terminal      | Phosphor Bonze(Ag Plated)   |



TOLERANCE UNLESS OTHERWISE STATED :  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3

3RD. ANGEL'S



UNITS

MM

|              |          |           |        |                |              |
|--------------|----------|-----------|--------|----------------|--------------|
| DRAWN BY:    | DATE     | MATL      | TITLE  | ENCODER SWITCH |              |
| Jack Lu      | 08/01/24 |           |        | ENCODER SWITCH |              |
| CHECKED BY:  | DATE     | FINISH    | MODLE  | ENCODER SWITCH |              |
| Jacky Chen   | 08/01/24 |           |        | ENCODER SWITCH |              |
| APPROVED BY: | DATE     | SCALE     | 1 : 1  | DWG NO.        | K26-12P-S476 |
| Tony Kao     | 08/01/24 | SHEET NO. | 1 of 1 | PART NO.       | K26-12P-S476 |

SIZE  
A4  
VER  
R