



P.C.B LAND PATTERN

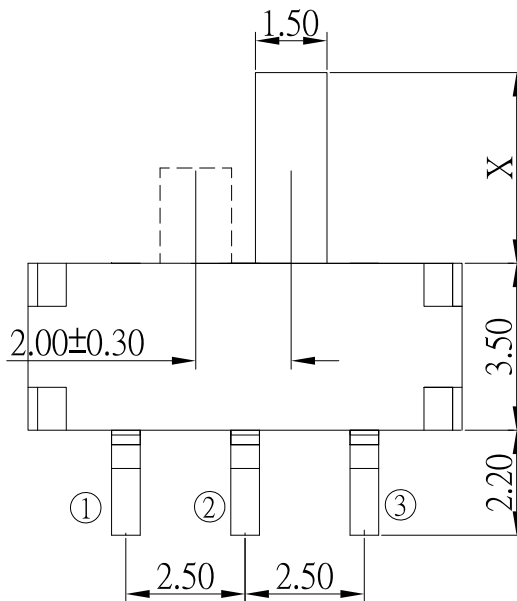

CIRCUIT DIAGRAM



SS-B80x-x-S246

Model No.	X (mm)
SS-B80	2.0
SS-B80A	4.0

SLIDER COLOR :

Black : B

White : W

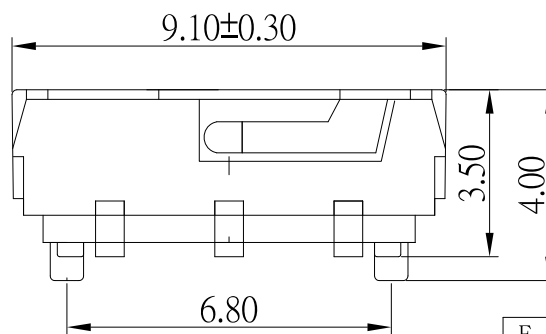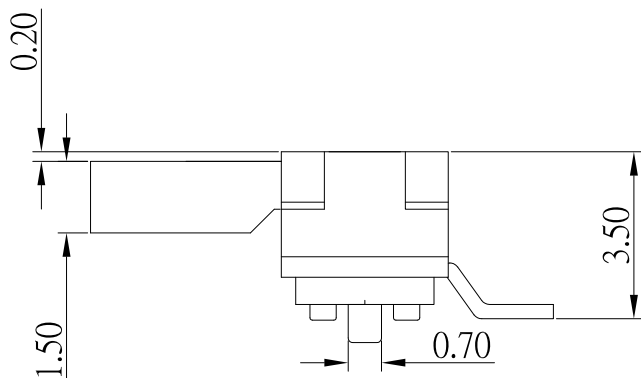

SPECIFICATIONS

Rating	100mA , 12V DC
Insulation Resistance	50M $\Omega$ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m $\Omega$ Max.
Operating Force	160 $\pm$ 60gf
Operating Life	10,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA6T	Black
A	SLIDER	1	PA46	Black

9	更新SPEC	Jack	111122
8	更新材質	Jack	092821
7	更新材質	Jack	110719
6	新增撥柄顏色選項	Jack	102416
5	更新SPEC及材質	Jack	102214
4	更新材質	Jack	040214
3	更新為A0版	Jack	120313
2	更新料號	Jack	070413
1	更新Rating	Jack	062813
ITEM NO.	DESCRIPTION	DRAWN	DATE

東莞市高迪電子有限公司  
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	$\pm 0.2$
Above 5 ~ 15	$\pm 0.3$
Above 15 ~ 30	$\pm 0.4$
Above 30 ~ 50	$\pm 0.5$
Angle	$\pm 0.3$

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE
Jack Lu	11/11/22		SWITCH
CHECKED BY:	DATE	FINISH	MODLE
Jacky Chen	11/11/22		SMT SLIDE SWICTH
APPROVED BY:	DATE	SCALE	DWG NO.
Tony Kao	11/11/22	1 : 1	SS-B80x-x-S246
		SHEET NO.	PART NO.
		1 of 1	SS-B80x-x-S246

SIZE A4  
VER R9