

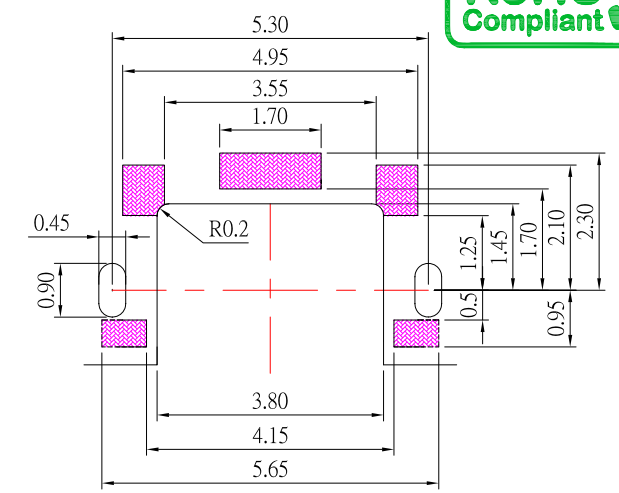
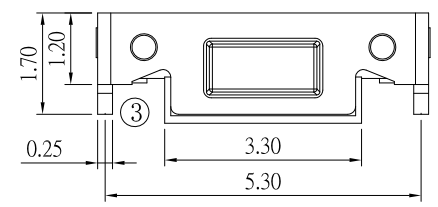


CIRCUIT DIAGRAM

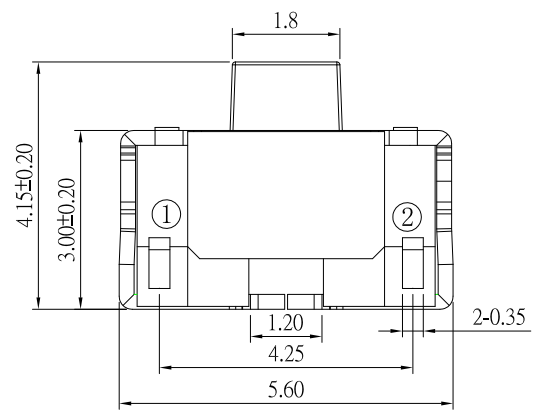

P.C.B LAND PATTERN



SPECIFICATIONS

| | |
|---------------------------------|---------------|
| Rating | 50mA, 12V DC |
| Insulation Resistance | 50MΩ Min. |
| Dielectric Withstanding Voltage | AC 250 V |
| Contact Resistance | 100mΩ Max. |
| Operating Force | 160 ± 40gf |
| Travel | 0.2 ± 0.1mm |
| Operating Life | 50,000 cycles |

| NO. | DESCRIPTION | QTY | MATERIAL | PLATING |
|-----|-------------|-----|-----------------|-----------|
| E | THERMINAL | 2 | PHOSPHOR BRONZE | Ag plated |
| D | CONTACT | 3 | STAINLESS STEEL | Ag plated |
| C | COVER | 1 | PHOSPHOR BRONZE | Ag plated |
| B | BASE | 1 | LCP | White |
| A | STEM | 1 | LCP | White |

| ITEM NO. | DESCRIPTION | DRAWN | DATE |
|----------|-------------|-------|--------|
| 5 | 新增Travel | Jack | 022323 |
| 4 | 更新CONTACT數量 | Jack | 011022 |
| 3 | 更新規格 | Jack | 111921 |
| 2 | 新增COVER 鍍層 | Jack | 102121 |
| 1 | 更新材質顏色 | Jack | 102318 |

東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

| | | | | |
|--------------|----------|-----------|----------|----------------|
| DRAWN BY: | DATE | MAT'L | TITLE | SWITCH |
| Jack Lu | 02/23/23 | | | |
| CHECKED BY: | DATE | FINISH | MODLE | TACT SWITCH |
| Jacky Chen | 02/23/23 | | | |
| APPROVED BY: | DATE | SCALE | DWG NO. | TS-A28- 2-S246 |
| Tony Kao | 02/23/23 | 1 : 1 | | |
| | | SHEET NO. | PART NO. | TS-A28- 2-S246 |
| | | 1 of 1 | | |
| | | | | SIZE A4 |
| | | | | VER R5 |