



PCB LAYOUT

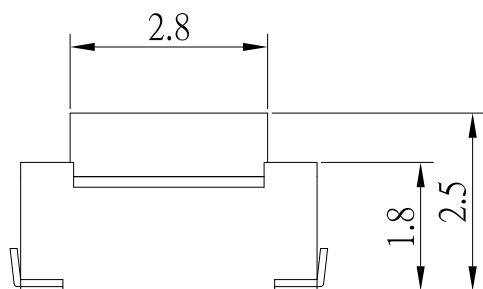

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 16V 50mA.		
Insulation Resistance	100 MΩ Min.		
Contact Resistance	100 mΩ Max.		
Travel	0.15 ± 0.1mm		
Operating Force	2	160 ± 50gf	320 ± 50gf
Operating Life (cycles)	100,000	50,000	

E	TERMINAL	4	PHOSPHOR BRONZE	Ag plated
D	CONTACT	2	SUS	Ag plated
C	COVER	1	SUS	
B	BASE	1	LCP	WHITE
A	STEM	1	PA6T	WHITE
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



TOLERANCE UNLESS OTHERWISE STATED:  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3°

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	08/13/15			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH 雙彈片
Jacky Chen	08/13/15			
APPROVED BY:	DATE	SCALE	DWG NO.	TS-A45-xS-S246
Tony Kao	08/13/15	1 : 1		
		SHEET NO.	PART NO.	TS-A45-xS-S246
		1 of 1		
				SIZE A4
				VER R1

1	新增Operating Force:320gf及更新Travel	Jack	081315
ITEM NO.	DESCRIPTION	DRAWN	DATE