

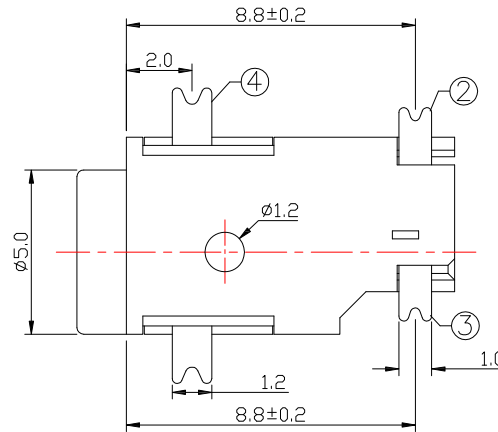


P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)



SPECIFICATION

1. Rating : DC 30V , 2.0A
2. Contact resistance : $\leq 30m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 2-20N
6. life test : 5,000 cycles

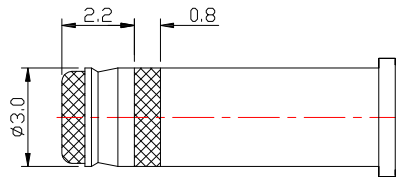

PLUG

MODEL NO.	DC-043D-1.0
SCHEMATIC	4
	3
	2

④	CONTACT FOOT	1	Phosphor Bronze	Au-Plating
③	PIN	1	Phosphor Bronze	Au-Plating
②	SPRING PIECE	1	Phosphor Bronze	Au-Plating
①	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	01/05/18		MODLE	DC JACK
CHECKED BY:	DATE	FINISH	SCALE	1 : 1
Jacky Chen	01/05/18		DWG NO.	DC-043D-1.0-S124
APPROVED BY:	DATE	SHEET NO.	PART NO.	DC-043D-1.0-S124
Tony Kao	01/05/18	1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE